



Power Electronics & Energy Storage Product Brochure 2026

High performance, true renewable energy — inverters, energy storage systems, UPS and OEM/ODM power solutions for a connected, cleaner future.

84

Products

13

Product Lines

80+

R&D Engineers

40+

Countries Served

WHO WE ARE

Manufacturing strength, engineered in-house

From our own DSP control and power stages to fully-owned factories across two countries, Risunic designs and builds the power electronics behind modern energy — with certification to match every major grid standard.

01

R&D

80+ engineers, 8%+ of revenue reinvested, 7 dedicated teams — in-house DSP, power stages and firmware.

02

Own Factory Campus

Two fully-owned plants — Huizhou & Vietnam — across 80,000 sqm.

03

Manufacturing Strength

75%+ automation, 300,000+ units monthly capacity.

04

Integrated OEM/ODM

Bare boards, open-frame PSU and digital high-power up to 40KW.

CONTENTS

Product Range

Thirteen product lines, eighty-four products — covering residential, commercial and industrial power electronics and energy storage.

01	Split Phase Inverters	2
-----------	------------------------------	---

02	Inverter 3.4V 314Ah Single Cell 500W/1.2KW	2
-----------	---	---

03	Inverter	12
-----------	-----------------	----

04	MPPT Solar Controllers	3
-----------	-------------------------------	---

05	Portable Power Stations	7
-----------	--------------------------------	---

06	All-in-One Energy Storage Systems	21
-----------	--	----

07	Micro Inverters	3
-----------	------------------------	---

08	Battery Storage	12
-----------	------------------------	----

09 Backup Power Supplies

2

10 UPS Systems

6

11 Wall Plug PoE

4

12 Desktop PoE

8

13 Rackmount PoE

2

Split Phase Inverters

2

120/240V Split Phase Output



R0378

R0378 Split Phase Inverter 8KW

- 8KW Split Phase Inverter
- 51.2V Battery Compatible
- 120/240V AC Output
- Pure Sine Wave

KEY SPECIFICATIONS

Model	R0378
InverterMode-Rated Power(VA)-Split Phase	8000VA
InverterMode-Rated Power(VA)-Single Phase	6000VA
InverterMode-Rated Power(W)-Split Phase	8KW
InverterMode-Rated Power(W)-Single Phase	6KW
RatedBattery Voltage	51.2V
Battery Type	Lead-acid / Lithium

InverterMode-Motor Load Capacity	6HP
---	-----

InverterMode-Max Efficiency	>88%
------------------------------------	------



R0388

R0388 Split Phase Inverter 12KW

12KW Split Phase Inverter

51.2V Battery Compatible

120/240V AC Output

Pure Sine Wave

KEY SPECIFICATIONS

Model	R0388
InverterMode-Rated Power(VA)-Split Phase	12000VA
InverterMode-Rated Power(VA)-Single Phase	7200VA
InverterMode-Rated Power(W)-Split Phase	12KW
InverterMode-Rated Power(W)-Single Phase	7.2KW
RatedBattery Voltage	51.2V
Battery Type	Lead-acid / Lithium
InverterMode-Motor Load Capacity	6HP
InverterMode-Max Efficiency	>92%

Inverter 3.4V 314Ah Single Cell 500W/1.2KW

2 Single-Cell LiFePO4
Inverter



R0337

R0337 Power Inverter 500W IP21 LIP 3.2V 314Ah

500W Single Cell Inverter

3.2V LiFePO4 Input

230V AC Output

IP21 Indoor Design

KEY SPECIFICATIONS

Model	R0337
AC Output-Max Efficiency	≥84%
DC Charging-Efficiency	≥87%
DC Input-Rated Voltage	3.2Vdc (LIP)
DC Input-Voltage Range	2.9~3.6Vdc
DC Input-Over Voltage Protection	3.75±0.05Vdc
DC Input-Under Voltage Protection	2.6±0.05Vdc
AC Output Rated Voltage	230Vac
AC Output-Voltage Range	170~230Vac



R0404

R0404 Power Inverter 1.2KW IP21 LIP 6.4V×2 314Ah

1.2KW Dual Cell Inverter

6.4V 2×LiFePO4 Input

230V AC Output

IP21 Indoor Design

KEY SPECIFICATIONS

Model	R0404
DC Input-Rated Voltage	6.4Vdc (2×LIP)
DC Input-Voltage Range	6.0~7.3Vdc
DC Input-Over Voltage Protection	7.5±0.05Vdc
DC Input-Under Voltage Protection	5.2±0.05Vdc
AC Output Rated Voltage	230Vac
AC Output-Voltage Range	160~230Vac
AC Input Rated Voltage	230Vac
AC Input Voltage Range	90~280Vac



R0285

R0285 Power Inverter 2.4KW IP21 24V

- 2.4KW Bidirectional Inverter
- 24V DC Input
- 230V AC Pure Sine Wave
- MPPT 1.4KW Built-in

KEY SPECIFICATIONS

Model	R0285
AC Mode-Rated Power	2.4KW
Charger - AC Efficiency (Peak)	92%
Charger - PV Efficiency (Peak)	92%
InverterMode-Peak Efficiency	90%
AC Mode-Output Voltage	230Vac
AC Mode-Voltage Range	90~144Vac
Battery - Rated Voltage	24Vdc
Battery - Float Charge Voltage	27Vdc



R0286

R0286 Power Inverter 4KW IP21 48V

4KW Inverter/Charger

48V DC Input

230V AC Output

True Sine Wave

KEY SPECIFICATIONS

Model	R0286
Rated Power	4KW
Battery Rated Voltage	48Vdc
Output Voltage	230Vac
Protection Rating	IP21
Output Waveform	Pure Sine Wave
Output Frequency	50Hz



R0287

R0287 Power Inverter 6.2KW IP21 48V

6.2KW Inverter/Charger

48V DC Input

230V AC Output

True Sine Wave

KEY SPECIFICATIONS

Model	R0287
Rated Power	6.2KW
Battery Rated Voltage	48Vdc
Output Voltage	230Vac
Protection Rating	IP21
Output Waveform	Pure Sine Wave
Output Frequency	50Hz



R0319

R0319 Power Inverter IP21 25.6V

3KW Bidirectional Inverter

25.6V DC Input

230V AC Pure Sine Wave

IP21 Indoor Rated

KEY SPECIFICATIONS

Model	R0319
DC Output(Charging)- Efficiency	≥94%
DC Input-Rated Voltage	25.6Vdc
DC Input-Voltage Range	20~28.8Vdc
AC Output Rated Voltage	230Vac
AC Output-Voltage Regulation Accuracy	±5V
AC Input Rated Voltage	230Vac
AC Input Voltage Range	176~264Vac
DC Output(Charging)- Voltage Range	20~28.8Vdc



R0355

R0355 Power Inverter 6.2KW IP65 48V

- 6.2KW Off-Grid Inverter
- 48V DC Input
- IP65 Outdoor Rated
- Pure Sine Wave Output

KEY SPECIFICATIONS

Model	R0355
InverterMode-RatedOutput Power	6.2KW
LineMode-Efficiency	≥91%
InverterMode-Peak Efficiency	≥94%
LineMode-RatedInput Voltage	230Vac
LineMode-Low VoltageDisconnect	176Vac±5V
LineMode-High VoltageDisconnect	264Vac±5V
InverterMode-Output Voltage	230Vac±5%
Battery - Rated Voltage	48Vdc



R0403

R0403 Power Inverter 10KW IP65 48V

- 10KW Off-Grid Inverter
- 48V DC Input
- IP65 Outdoor Rated
- Pure Sine Wave Output

KEY SPECIFICATIONS

Model	R0403
PV Input-Rated Power	10KW
InverterMode-RatedOutput Power	10KW
LineMode-Efficiency	≥94%
InverterMode-Peak Efficiency	≥93%
LineMode-RatedInput Voltage	230Vac
LineMode-Low VoltageDisconnect	176Vac±5V
LineMode-High VoltageDisconnect	264Vac±5V
InverterMode-Output Voltage	230Vac±5%



RS-INV-OFF-1600-3000

Off-Grid Solar Inverter 1.6kW/3.0kW (2000VA/3200VA)

2000VA/1600W (12V) / 3200VA/3000W (24V)


Pure sine wave, 230V AC output

Built-in 80A MPPT solar charger, PV up to 400V

60A AC charger, 80A max total charge

KEY SPECIFICATIONS

Model	SUN AX PRO-2000-12 / SUN AX PRO-3200-24
Rated Power	2000VA/1600W / 3200VA/3000W
Max Input Current	1/13A
Efficiency (Peak) PV to INV	98%
Efficiency (Peak) Battery to INV	94%
Voltage	230VAC
Selectable Voltage Range	170~280VAC (for PCs)
AC Voltage Regulation	230VAC±5%
Battery Voltage	12VDC / 24VDC



RS-INV-HYB-BX

Hybrid (On/Off-Grid) Solar Inverter 3.6-6.2kW (BX)

3.6kW / 4.2kW / 6.2kW rated output


Grid-tie, off-grid and hybrid modes

120A MPPT solar charger, PV up to 500V

98% max DC/AC efficiency

KEY SPECIFICATIONS

Model	SUN BX-3.6KW / SUN BX-4.2KW / SUN BX-6.2KW
Rated Output Power	3600W / 4200W / 6200W
Max Input Current	1/18A / 1/22A
Max Conversion Efficiency (DC/AC)	98%
Efficiency (DC to AC)	94%
Nominal DC Voltage / Max DC Voltage	360/500VDC
Start-up Voltage / Initial Feed-in Voltage	60VDC/90VDC
MPPT Voltage Range	60-450VDC
Nominal Output Voltage	220/230/240VAC



RS-INV-HYB-CX

Hybrid Solar Inverter 3.6kW/6kW (CX)

3.6kW / 6kW rated output

Parallel up to 9 units

120A MPPT solar charger

7.2/12kW surge power

KEY SPECIFICATIONS

Model	SUN CX 3.6KW / SUN CX 6KW
Rated Output Power	3600W / 6000W
MPPT Trackers / Max Input Current	1/22A
MPPT Trackers / Max Input Current	1/18A
Max Conversion Efficiency (Slow to AC)	98%
Efficiency (DC to AC)	94%
Nominal DC Voltage / Max DC Voltage	360/500VDC
Start-up Voltage / Initial Feed-in Voltage	90VDC/120VDC
MPPT Voltage Range	60~450VDC



RS-INV-MIX-6000-48

Single-Phase Hybrid Inverter 6kW/48V

6kW (6000VA) rated output, 48V battery


9000W max PV input, 80-520V MPPT range

Adjustable power factor 0.8 leading-0.8 lagging

80A charge / 105A discharge

KEY SPECIFICATIONS

Model	HN6KS Series
Max Input Current	19/19A
Max PV Array Open-Circuit Voltage	550VDC
MPPT Voltage Range	80~520VDC
MPPT Full-Load Voltage Range	250~500VDC
Nominal Output Voltage	230VAC
Battery Voltage	48VDC
Battery Voltage Range	40~60VDC
Nominal Output Voltage	230Vac



RS-INV-HYB-EX

Hybrid Solar Inverter 7.2-10.2kW (EX)

7.2kW / 8.2kW / 10.2kW rated output

Dual MPPT, up to 160A solar charging

98% max DC/AC efficiency

220/230/240V output, >0.99 power factor

KEY SPECIFICATIONS

Model	SUN EX-7.2KW / SUN EX-8.2KW / SUN EX-10.2KW
Rated Output Power	7200W/7200VA / 8200W/8200VA / 10200W/10200VA
Max Input Current	1/23A / 1/23A / 2/18A / 1/23A
Max Input Current	1/23A / 1/23A / 2/18A1/23A / 2/18A
Max Conversion Efficiency (DC/AC)	98%
Efficiency (DC to AC)	94%
Nominal DC Voltage / Max DC Voltage	360/500VDC
Start-up Voltage / Initial Feed-in Voltage	90VDC/120VDC
MPPT Voltage Range	90~450VDC



RS-INV-OFF-3500-5500

Off-Grid Solar Inverter 3.5kW/5.5kW

3.5kW (24V) / 5.5kW (48V) pure sine wave

7kW / 11kW surge power

100A MPPT solar charger, PV up to 500V

97% peak PV efficiency

KEY SPECIFICATIONS

Model	SUN FX-3.5KW / SUN FX-5.5KW
Rated Power	3500VA/3500W / 5500VA/5500W
Efficiency (Peak) PV to INV	97%
Efficiency (Peak) Battery to INV	94%
Max Efficiency	98%
Voltage	230VAC
Selectable Voltage Range	170~280VAC (for PCs)
AC Voltage Regulation (Battery Mode)	230VAC±5%
Battery Voltage	24VDC / 48VDC



BDH-318

BDH-318 MPPT Solar Controller 30-50A 314Ah

- 30~50A MPPT Charge Controller
- Max 180V PV Input
- Up to 99.9% Efficiency
- Lead-Acid/Gel/LiFePO4/NMC

KEY SPECIFICATIONS

Model	BDH-318
Battery Types	· · LiFePO4(3.2V) · (3.7V) ·
Conversion Efficiency	99.9%
Lead-Acid Voltage	12V ~ 48V / 12V~96V
LeadBattery Voltage	48V~240V
Max PV Open Circuit Voltage	0V ~ 180V
Net Weight	2.1 kg
Dimensions	218 × 165 × 100 mm
Protection	/



BCC-318A

BCC-318A MPPT Solar Controller 60-120A 314Ah

60~120A MPPT Charge Controller

Max 480V PV Input

Up to 99.9% Efficiency

Lead-Acid & LiFePO4 Compatible

KEY SPECIFICATIONS

Model	BCC-318A
Battery Types	· · LiFePO4(3.2V) · (3.7V) ·
Conversion Efficiency	99.9%
Lead-Acid Voltage	12V~48V
Max PV Open Circuit Voltage	0V ~ 480V
Net Weight (BCC-1)	7.65 kg
Net Weight (BCC-2)	3.75 kg
Dimensions (BCC-1)	318 × 222 × 110 mm
Dimensions (BCC-2)	335 × 246 × 145 mm



BDZ-318B

BDZ-318B MPPT Solar Controller 30-80A 314Ah

30~80A MPPT Charge Controller

Max 230V PV Input

Up to 99.9% Efficiency

Lead-Acid & LiFePO4 Compatible

KEY SPECIFICATIONS

Model	BDZ-318B
Battery Types	· · LiFePO4(3.2V) · (3.7V) ·
Conversion Efficiency	99.9%
Lead-Acid Voltage	12V~96V
Lithium Battery Voltage	48V~240V
Max PV Open Circuit Voltage	0V ~ 230V
Net Weight (BDZ-1)	2.3 kg
Net Weight (BDZ-2)	2.85 kg
Dimensions (BDZ-1)	240 × 165 × 100 mm



RPS-1200

RPS-1200 Portable Power Station 1.2KW

- 1.2KW Pure Sine Wave
- 806Wh LiFePO4 Battery
- 110V/220V Dual Voltage
- 100W USB-C PD + QC3.0

KEY SPECIFICATIONS

Battery Type (Battery Type)	(LiFePO4)
Battery Capacity (Battery Capacity)	806Wh
ACOutput Power	1.2KW Max
ACOutput Voltage	110V / 220V
Weight (Weight)	11.2kg
AC Input (AC Input)	600W (220~240V/10A)
USBOutput	USB×2 (QC3.0): 5V/3A, 9V/2A, 12V/2.6A (27W Max) · USB×2: 5V/3A
TYPE-COutput	TYPE-C×3: 5V/3A, 9V/3A, 12V/3A, 20V/5A (100W Max)
QCFast ChargeOutput	QC3.0 18W



RPS-150

RPS-150 Portable Power Station 150W

150W Pure Sine Wave

LiFePO4 Safe Battery

100~240V AC Output

60W PD Fast Charge

KEY SPECIFICATIONS

Battery Type (Battery Type)	(LiFePO4)
ACOutput Power	150W Max
ACOutput Voltage	100V~120V / 220V~240V
AC Input (AC Input)	12V/5A (60W)
USBOutput	5V/3A (USB1) · 5V/3A (USB2)
PDFast ChargeOutput	PD 60W Max
Car ChargerOutput (Car Output)	12V/5A (60W)



RPS-300

RPS-300 Portable Power Station 300W 314Ah

300W Pure Sine Wave

288Wh LiFePO4 Battery

110V/220V Switchable

USB-C + Quick Charge

KEY SPECIFICATIONS

Battery Type (Battery Type)	(LiFePO4)
Battery Capacity (Battery Capacity)	288Wh (3.2V/90000mAh)
ACOutput Power	300W Max
Battery Voltage	3.2V
ACOutput Voltage	110V / 220V
Weight (Weight)	2.7kg
AC Input (AC Input)	300W
Utility PowerChargingTime	2
100WSolar PanelCharging	4.6



RPS-600

RPS-600 Portable Power Station 600W

600W Pure Sine Wave

LiFePO4 Safe Battery

110V/220V Dual Output

USB-C PD + QC3.0 Fast Charge

KEY SPECIFICATIONS

Battery Type (Battery Type)	(LiFePO4)
ACOutput Power	600W Max
ACOutput Voltage	110V / 220V
Weight (Weight)	5.8kg
AC Input (AC Input)	300W
Utility PowerChargingTime	8.5
100WSolar PanelCharging	6
40WSolar PanelCharging	4.5
USBOutput	USB×2: 5V/3A, 9V/2A, 12V/1.5A (18W Max)



ESS-300W

ESS-300W Portable Power Station 314Ah

300W Pure Sine Wave


896Wh LiFePO4 Battery

MPPT Solar 300W Input

8000 Cycle Long Life

KEY SPECIFICATIONS

Model	ESS 300W+896WH
Battery Type	LiFePO4
Battery Capacity	896Wh
Nominal Battery Voltage	3.2Vdc
RatedACOutput Power	300W
Output VoltageWaveform	Pure Sine Wave
Output Voltage	185~230VAC 50Hz
Equalization Charge Voltage	3.6Vdc
Float Charge Voltage	3.5Vdc



ESS-500W

ESS-500W Portable Power Station 314Ah

500W Pure Sine Wave

1000Wh LiFePO4 Battery

400W AC+Solar Charging

MPPT Solar 300W Max

KEY SPECIFICATIONS

Model	ESS 500W+1000WH
Battery Type	LiFePO4
Battery Capacity	1004.8Wh
Nominal Battery Voltage	3.2Vdc
RatedACOutput Power	500W
Output VoltageWaveform	Pure Sine Wave
Output Voltage	185~230VAC 50Hz
NominalInput Voltage	230Vac
MPPTVoltage Range	10~55Vdc



RS-PORT-300-1000W

Portable Power Station 300W-1000W

300W / 500W / 1000W, 896-2009.6Wh LiFePO4


Pure sine wave, 230V 50Hz output

Built-in 300-800W MPPT solar charging

5V 1A USB output, LED SOC indicators

KEY SPECIFICATIONS

Model	ESS PORTABLE SERIES
Capacity	896Wh / 1004,8Wh / 2009.6Wh
Typical Capacity	280Ah / 314Ah / 314Ah*2
Nominal Battery Voltage	3.2Vdc / 3.2Vdc / 6.4Vdc
Rated AC Output Power	300W / 500W / 1000W
DC Output Power	5W Max.
Output Voltage Waveform	Pure sine wave / Pure sine wave / Pure sine wave
Output Voltage	185~230VAC 50Hz / 185~230VAC 50Hz / 185~230VAC 50Hz
Low DC Cut-off Voltage	2.9Vdc / 2.9Vdc / 5.8Vdc



ESS-W-1KW

ESS-W-1KW Wall-Mount Storage 314Ah

1KW Pure Sine Wave

LiFePO4 2000Wh Battery

MPPT Solar Charge

UPS <20ms Switch

KEY SPECIFICATIONS

Model	ESS-W 1KW+2009WH
Battery Type	LiFePO4
Battery Capacity	2009.6Wh
Nominal Battery Voltage	6.4Vdc
RatedACOutput Power	1KW
Output VoltageWaveform	Pure Sine Wave
Output Voltage	185~230VAC 50Hz
MPPTVoltage Range	13~55Vdc
Max PV Open Circuit Voltage	56Vdc



RL550

RL550 All-in-One Hybrid Inverter 5.5KW

5.5KW Hybrid Inverter

4800Wh/100Ah Battery

Dual MPPT 6.5KW PV Input

UPS <10ms Switch

KEY SPECIFICATIONS

Battery ModuleModel	ESS LIO-I 4810
Battery Capacity	4800Wh (48VDC / 100Ah)
Battery Mode - Rated Output Voltage	202/208/220/230/240VAC
AC Input - Max Input Current	40A
Solar - MPPT Trackers/Max Input Current	2 / 2×13A
PeakConversion Efficiency(DC/AC)	96%
EUEfficiency@Vnominal	95%
Battery Mode - Efficiency (DC/AC)	93%
AC Input - Voltage Range	170-280VAC



RL650

RL650 All-in-One Hybrid Inverter 6.5KW

6.5KW Rated Power

5KWh Li-ion Battery

Dual MPPT Trackers

UPS Function <10ms

KEY SPECIFICATIONS

Battery Type	(Li-ion)
Battery Capacity	5KWh (48VDC)
AC Input - Max Input Current	45A
Solar - MPPT Trackers/Max Input Current	2 / 2×13A
Peak Conversion Efficiency(DC/AC)	96%
AC Input - Voltage Range	170-280VAC
Nominal DC Voltage	48VDC
Solar-MPPT Voltage Range	120~450VDC
On-Grid Output Voltage	202/208/220/230/240VAC



RL800

RL800 All-in-One Hybrid Inverter 8KW

8KW Rated Power

5KWh Li-ion Battery

Dual MPPT, 150A Charging

Parallel + 3-Phase Support

KEY SPECIFICATIONS

Battery Type	(Li-ion)
Battery Capacity	5KWh (48VDC)
AC Input - Max Input Current	50A
Solar - MPPT Trackers/Max Input Current	2 / 2×15A
Peak Conversion Efficiency(DC/AC)	96%
AC Input - Voltage Range	170-280VAC
Nominal DC Voltage	48VDC
Solar-MPPT Voltage Range	120~450VDC
On-Grid Output Voltage	202/208/220/230/240VAC



ESS-1KW

ESS-1KW All-in-One Energy Storage 314Ah

1KW Pure Sine Wave

2000Wh LiFePO4 Battery

MPPT Solar 550W Max

8000 Cycle Long Life

KEY SPECIFICATIONS

Model	ESS 1KW+2009WH
Battery Type	LiFePO4
Battery Capacity	2009.6Wh
Nominal Battery Voltage	6.4Vdc
RatedACOutput Power	1KW
Output VoltageWaveform	Pure Sine Wave
Output Voltage	185~230VAC 50Hz
NominalInput Voltage	230Vac
MPPTVoltage Range	13~55Vdc



ESS-12KW-16KWH

ESS-12KW-16KWh All-in-One Energy Storage 12KW

12KW/16KWh Off-Grid System

9KW PV Input 500VDC

160A Charge/Discharge

51.2V Battery Module

KEY SPECIFICATIONS

Model	ESS 12KW+16KWh
Battery Capacity	16KWh (14.4KWh usable)
Rated Battery Voltage	51.2VDC
MPPT Voltage Range	60-450VDC / 500VDC Max
Net/Gross Weight	152 / 173 kg
Dimensions (W×D×H)	550×245×1180 mm
Type	Off-Grid All-in-One ESS
Rated Inverter Power	12KW
AC Input	220-240V 50/60Hz



ESS-12KW-30KWH

ESS-12KW-30KWh All-in-One Energy Storage 12KW

12KW/30KWh Off-Grid System

9KW PV Input 450VDC

200A Charge/Discharge

Feed-in to Grid Support

KEY SPECIFICATIONS

Model	ESS 12KW+30KWh
Battery Capacity	30KWh
Rated Battery Voltage	51.2VDC
MPPT Voltage Range	60-450VDC
Net/Gross Weight	280 / 303 kg
Dimensions (W×D×H)	695×298×1550 mm
Type	Off-Grid All-in-One ESS
Rated Inverter Power	12KW
AC Input	220-240V 50/60Hz



ESS-12KW-60KWH

ESS-12KW-60KWh Commercial Storage 12KW

12KW/60KWh Stackable System

15KW PV Input 450VDC

200A Charge/Discharge

Feed-in to Grid Support

KEY SPECIFICATIONS

Model	ESS 12KW+60KWh
Battery Capacity	60KWh
Rated Battery Voltage	51.2VDC
MPPT Voltage Range	60-450VDC
Inverter Weight	33 kg
Battery Unit Weight	139 kg/PC
Type	Stackable Off-Grid All-in-One ESS
Rated Inverter Power	12KW
AC Input	220-240V 50/60Hz



ESS-12KW-64KWH

ESS-12KW-64KWh Commercial Storage 12KW

12KW/64KWh Rack-Mounted

15KW Dual MPPT PV Input

200A Charge/Discharge

Feed-in to Grid Support

KEY SPECIFICATIONS

Model	ESS 12KW+64KWh
Battery Capacity	64KWh
Rated Battery Voltage	51.2VDC
MPPT Voltage Range	60-450VDC
Inverter Weight	29 kg
Battery Unit Weight	119 kg/PC
Inverter Dimensions (W×D×H)	745×440×176 mm
Battery Dimensions (W×D×H)	745×440×240 mm
Type	Rack-Mounted Off-Grid All-in-One ESS



ESS-3-6KW-5KWH

ESS-3.6KW-5KWh Wall-Mount Storage System

3.6KW/5KWh Wall-Mount

Low Voltage 25.6V System

EPS Backup <10ms

Smart BMS Protection

KEY SPECIFICATIONS

Model	ESS 3.6KW+5KWh
ACOutputRated Power	3.6KW
RatedBattery Voltage	25.6VDC
Battery Type	LiFePO4
Output Max Efficiency (Battery Mode)	92.7% @24VDC
ACInput Voltage Range	90~280V / 170~280V (UPS)
ACOutput Voltage	208/220/230/240VAC
Max PV Open Circuit Voltage	500V
Product Dimensions LxWxH	400×300×600mm



ESS-3-6KW-8KWH

ESS-3.6KW-8KWh Wall-Mount Storage System

3.6KW/8KWh Off-Grid System

5KW PV MPPT 40-450V

25.6V Lead-Acid/Lithium Battery

100A Charge / 150A Discharge

KEY SPECIFICATIONS

Model	ESS 3.6KW+8KWh
Battery Capacity	8KWh
Rated Battery Voltage	25.6VDC
MPPT Voltage Range	40-450VDC
Net/Gross Weight	73 / 86 kg
Dimensions (W×D×H)	440×246×760 mm
Type	Off-Grid All-in-One ESS (Wall-Mount)
Rated Inverter Power	3.6KW
AC Input	208-240V 50/60Hz



RS-ESS-HX-6KW

All-in-One Solar Inverter Storage System 6kW (HX PRO)

- 6kW / 48V hybrid inverter, pure sine wave
- 5.12-20.48 kWh scalable LiFePO4 storage
- 230V 50Hz output, built-in MPPT 120A solar charger
- Grid + solar combined charging up to 120A

KEY SPECIFICATIONS

Nominal Capacity (25°C, 0.2C)	5.12KWh / 10.24KWh / 15.36KWh / 20.48KWh
Nominal Capacity	100AH / 200AH / 300AH / 400AH
Nominal Battery Voltage	51.2Vdc / 51.2Vdc / 51.2Vdc / 51.2Vdc
Rated Output Power	6KW / 6KW / 6KW / 6KW
Efficiency	92.00%
Output Voltage Waveform	Pure sine wave / Pure sine wave / Pure sine wave / Pure sine wave
Output Voltage	230VAC 50HZ / 230VAC 50HZ / 230VAC 50HZ / 230VAC 50HZ
Low DC Warning Voltage	45.8Vdc / 45.8Vdc / 45.8Vdc / 45.8Vdc
Low DC Cut-off Voltage	44.8Vdc / 44.8Vdc / 44.8Vdc / 44.8Vdc



ESS-6KW-16KWH

ESS-6KW-16KWh Hybrid Storage System

6KW/16KWh Hybrid System

51.2V Low Voltage

On/Off Grid Hybrid

Parallel 6 Units Max

KEY SPECIFICATIONS

Model	ESS 6KW+16KWh
ACOutputRated Power	6KW
RatedBattery Voltage	51.2VDC
Battery Type	LiFePO4
Output Max Efficiency (Battery Mode)	93% @48VDC
ACInput Voltage Range	90~280V / 170~280V (UPS)
ACOutput Voltage	208/220/230/240VAC
Max PV Open Circuit Voltage	500V
Gross Weight	159Kg



ESS-HX-6KW

ESS-HX-6KW Hybrid Inverter 6KW

6KW Hybrid Inverter

High PV 9KW Input

UPS <20ms Switch

Parallel Support

KEY SPECIFICATIONS

Model	ESS HX 6KW+16KWh
Grid-tieRated Power	6KW / 6KVA
RatedBattery Voltage	51.2VDC
Battery Type	LiFePO4
PVMax Input Power	9KW
Max. Efficiency	96.65%
European Efficiency	97.50%
MPPT Efficiency	99.00%
Battery Charge/Discharge Efficiency	94.60%



RS-ESS-3.6KW-8KWH

All-in-One ESS 3.6kW + 8kWh

3.6kW rated / 5.7kW peak output

8kWh (25.6V) LiFePO4 storage

208/220/230/240V output, 50/60Hz

MPPT solar input 18A/5000W, up to 500V PV

KEY SPECIFICATIONS

Model	3.6KW+8KWH
Rated Power	3.6
Overload Capacity (Battery Mode)	60s@102%~110% ; 10s@110%~130%
Max Efficiency	92.7%@24VDC
Rated Input Voltage	208/220/230/240; L+N+PE
Voltage Range	90~280±3 (normal mode) ;170~280±3 (UPS mode)
Voltage	208/220/230/240
Voltage Range	40~450
Open-Circuit Voltage	500



ESS-HY-10KW

ESS-HY-10KW Hybrid Inverter 10KW

10KW Split Phase Off-Grid

Dual MPPT 5KW+5KW PV

500VDC PV Input Max

120/240V Split Phase Output

KEY SPECIFICATIONS

Model	ESS HY 10KW+30KWh
Battery Capacity	30KWh
Peak Efficiency	~95%
Rated Battery Voltage	51.2VDC
MPPT Voltage Range	90-485VDC / 500VDC Max
Net/Gross Weight	255 / 283 kg
Dimensions (W×D×H)	695×298×1550 mm
Type	Off-Grid All-in-One ESS (Split Phase)
Rated Inverter Power	10KW



RS-ESS-6KW-15KWH

All-in-One ESS 6kW + 15kWh (IP54)

6kW rated output, 15kWh (51.2V) storage

Max efficiency 96.65%, Euro efficiency 97.5%

IP54 enclosure, 2-1 MPPT inputs

120A/120A charge/discharge

KEY SPECIFICATIONS

Model	6KW/15KWH
Rated Power	6
Overload Capacity	110%, 10s/130%, 3s/150%, 50ms
Max Efficiency	96.65%
European Efficiency	97.50%
PV Efficiency	99.00%
Charge/Discharge Efficiency	94.60%
Open-Circuit Voltage	550
Voltage Range	80~520



ESS-HY-12KW

ESS-HY-12KW Hybrid Inverter 12KW

12KW Split Phase Off-Grid

Dual MPPT 6KW+6KW PV

500VDC PV Input Max

120/240V Split Phase Output

KEY SPECIFICATIONS

Model	ESS HY 12KW+30KWh
Battery Capacity	30KWh
Peak Efficiency	~95%
Rated Battery Voltage	51.2VDC
MPPT Voltage Range	90-485VDC / 500VDC Max
Net/Gross Weight	255 / 283 kg
Dimensions (W×D×H)	695×298×1550 mm
Type	Off-Grid All-in-One ESS (Split Phase)
Rated Inverter Power	12KW



RS-ESS-6KW-16KWH

All-in-One ESS 6kW + 16kWh

6kW rated / 12kW peak output

16kWh (51.2V) LiFePO4 storage

208/220/230/240V 50/60Hz output

MPPT 19A+19A/9000W input, 120A charge

KEY SPECIFICATIONS

Model	6KW/16KWH
Rated Power	6
Overload Capacity (Battery Mode)	60s@102%~110%; 10s@110%~130%; 3s@130%~150%; 0.2s@>150%
Max Efficiency	93%@48VDC
Rated Input Voltage	208/220/230/240; L+N+PE
Voltage Range	90~280±3 (normal mode); 170~280±3(UPS mode)
Voltage	208/220/230/240
Voltage Range	80-520
Open-Circuit Voltage	500



RS-ESS-SPLIT-12KW-30KWH

Split-Phase All-in-One ESS 12kW + 30kWh

12kW split-phase / 7.2kW single-phase output

120V/240V (L1/N, L2/N) North America standard

30kWh (51.2V) LiFePO4 storage

MPPT 22A/12kW input, 220A charge

KEY SPECIFICATIONS

Model	12KW split phase inverter+30KWH All in one machine
Rated Power	Split phase:12000; Single phase:7200
Max Efficiency	>91%
Rated Input Voltage	120 (L1/N,L2/N) 240Vac(L1/L2)
Voltage Range	(85Vac~140Vac) ±2%
Voltage	120Vac (L1/N,L2/N) /240Vac (L1/L2)
Voltage Range	90Vdc~485Vdc
Open-Circuit Voltage	500Vdc
Rated Battery Voltage	51.2VDC



RS-ESS-HX-STACK

Stacked All-in-One ESS 6-10kW (HX PRO)

6kW / 8kW / 10kW hybrid inverters

10.24-20.48 kWh stackable storage

12-20kW peak / surge power

80-140A AC charging, 120A MPPT solar

KEY SPECIFICATIONS

Model	ESS HX PRO 6KW/10KWH / ESS HX PRO 8KW/10KWH / ESS HX PRO 8KW/15KWH / ESS HX PRO 10KW/20KWH
Inverter Model	6KW/48V Hy brid / 8KW/48V Hy brid / 8KW/48V Hy brid / 10KW/48V Hy brid
Rated Power	6KW / 8KW / 8KW / 10KW
Battery Type	LiFePO4
Capacity	200AH / 200AH / 300AH / 400AH
Voltage	51.2Vdc / 51.2Vdc / 51.2Vdc / 51.2Vdc
Float Charge Voltage	56.0Vdc / 56.0Vdc / 56.0Vdc / 56.0Vdc
Voltage Range	40.0Vdc~58.4Vdc / 40.0Vdc~58.4Vdc / 40.0Vdc~58.4Vdc / 40.0Vdc~58.4Vdc
Input Voltage	208/220/230/240; L+N+PE



R0410

R0410 Micro Inverter 1-2 Panels

- 400~800W Microinverter
- 1-2 Panel Support
- Grid-Tie EN50549-1
- 96.5% Peak Efficiency

KEY SPECIFICATIONS

Model	R0410
AC Output-Max Efficiency	96.5%
DC Input-Voltage Range	16~60Vdc
AC Output Voltage/Frequency	230Vac / 50Hz
Net Weight	2.54 kg
Dimensions	181 × 193 × 38.5 mm
Safety Standard	EN/IEC 62109-1:2010, EN/IEC 62109-2:2011
Protection Rating	IP67
Communication	WiFi + Bluetooth



R0411

R0411 Micro Inverter 2 Panels

800W Microinverter

2-Panel Input Support

Grid-Tie 230V/50Hz

Peak Efficiency 96.5%

KEY SPECIFICATIONS

Model	R0411
AC Output-Max Efficiency	96.5%
DC Input-Voltage Range	16~60Vdc
AC Output Voltage/Frequency	230Vac / 50Hz
Net Weight	3.78 kg
Dimensions	227 × 195.5 × 42 mm
Safety Standard	EN/IEC 62109-1:2010, EN/IEC 62109-2:2011
Protection Rating	IP67
Communication	WiFi + Bluetooth



R0412

R0412 Micro Inverter 4 Panels

1.6KW Microinverter

4-Panel Input Support

Grid-Tie 230V/50Hz

Individual MPPT per Panel

KEY SPECIFICATIONS

Model	R0412
AC Output-Max Efficiency	96.5%
DC Input-Voltage Range	16~60Vdc
AC Output Voltage/Frequency	230Vac / 50Hz
Net Weight	6.7 kg
Dimensions	342 × 225.4 × 50 mm
Safety Standard	EN/IEC 62109-1:2010, EN/IEC 62109-2:2011
Protection Rating	IP67
Communication	WiFi + Bluetooth



RS-BAT-TOWER-300AH

Tower LiFePO4 Battery 25.6V/51.2V 300Ah

- 25.6V / 51.2V 300Ah options, up to 15.36 kWh
- A-grade LiFePO4 cells, 6,000+ cycle life
- Smart BMS: Deye / Growatt / Voltronic / GOODWE / SMA / SOFAR compatible
- CAN / RS485 / RS232 communication

KEY SPECIFICATIONS

Model	HF PRO 25.6V300Ah / HF PRO 51.2V300Ah
Nominal Battery Model	25.6V300AH / 51.2V300AH
Battery Type	LiFePO4 / LiFePO4
Nominal Capacity (25°C, 0.2C)	7680Wh / 15360KWh
Voltage Range (Vdc)	22.4~29.2V / 44.8~58.4V
Fast Charge Voltage (Vdc)	28.0V / 56.0V
Weight (NW, kg)	82.3Kg / 145.0Kg
Weight (GW, kg)	87.0Kg / 158.0Kg

Dimensions L×W×H
(Product, mm)

453*406*497mm / 800X410X286



RS-BAT-RACK-51.2V

Rack-Mount LiFePO4 Battery 51.2V 100/200Ah

51.2V 100Ah (5.12 kWh) / 200Ah (10.24 kWh)

4U rack-mount form factor, standard rack fit

Up to 32 modules parallel via single BMS

150A continuous / 200A pulse (30s) discharge

KEY SPECIFICATIONS

Model	HC PLuS 51.2V100AH / HC PLuS 51.2V200AH
Nominal Capacity (25°C, 0.2C) (Wh)	5120WH / 10240WH
Nominal Battery Voltage (Vdc)	51.2V / 51.2V
Bulk Charge Voltage (Vdc)	56.0V / 56.0V
Operating Voltage Range (Vdc)	44.8~57.6V / 44.8~57.6V
Weight (NW, kg)	48kgs / 60kgs
Weight (GW, kg)	51kgs / 62kgs
Dimensions L×W×H (Product)	575*440*176mm / 575*440*176mm

Dimensions L×W×H
(Package)

624*552*240mm / 624*552*240mm



RS-BAT-HV-STACK-MAX

High-Voltage Stacked LiFePO4 Battery 10.2-51.2kWh

Scalable 10.2-51.2 kWh, 102.4-512V high-voltage DC

Modular 51.2V 100Ah stacking design (2-10 modules)

IP54 rated, RS485 / CAN communication

100A max charge/discharge, dual M8 terminals

KEY SPECIFICATIONS

Model	HB PRO MAX10.2KWh / HB PRO MAX15.3KWh / HB PRO MAX20.4KWh / HB PRO MAX25.6KWh
Nominal Capacity (25°C, 0.2C)	10.24KWh / 15.36KWh / 20.48KWh / 25.6KWh
Nominal Voltage (DC)	102.4V / 153.6V / 204.8V / 256.0V
Voltage Window (DC)	89.6~ 116.8V / 134.4~ 175.2V / 179.2~233.6V / 224.0~292.0V
Weight (NW, kg)	123Kg / 172Kg / 221Kg / 266Kg
Dimensions (W/D/H)	703*490*611mm / 703*490*803mm / 703*490*995mm / 703*490*1187mm
Safety Standard	UN38.3,MSDS,IEC62619,EN62619,EN61000
Protection	Overcharge, Over-discharge, Overcurrent, Short-circuit, Over-temperature protection

Communication

RS485,CAN



RS-BAT-FLOOR-PRO-MAX

Floor-Standing LiFePO4 Battery 25.6V/51.2V 200-300Ah

25.6V/51.2V, 200/300Ah, up to 15.36 kWh

150A continuous / 200A pulse discharge

LED display, optional RS485 / Bluetooth

A-grade LiFePO4, 6,000+ cycles

KEY SPECIFICATIONS

Model	HA PRO MAX25.6V200Ah / HA PRO MAX25.6V300Ah / HA PRO MAX51.2V200Ah / HA PRO MAX51.2V300Ah
Battery Type	LiFePO4
Nominal Capacity (25°C, 0.2C) (Ah)	200AH / 300AH / 200AH / 300AH
Nominal Capacity (25°C, 0.2C) (Wh)	5120WH / 7680WH / 10240WH / 15360WH
Nominal Battery Voltage (Vdc)	25.6V / 25.6V / 51.2V / 51.2V
Fast Charge Voltage (Vdc)	28.0V / 28.0V / 56.0V / 56.0V
Operating Voltage Range (Vdc)	22.4~29.2V / 22.4~29.2V / 44.8~58.4V / 44.8~58.4V
Weight (NW, kg)	76.6Kg / 80.0Kg / 142.3Kg / 153.0Kg
Weight (GW, kg)	81.0Kg / 83.0Kg / 157.0Kg / 167.0Kg



RS-BAT-STACK-51.2V

Stacked LiFePO4 Battery 51.2V 100-400Ah

51.2V 100-400Ah, 5.12-20.48 kWh

IP54 stacked modular design

Up to 400A continuous / 600A pulse discharge

RS485 / CAN: Deye, Growatt, Voltronic, GOODWE, SMA, SOFAR

KEY SPECIFICATIONS

Model	HB PRO Series51.2V100Ah / HB PRO Series51.2V200Ah / HB PRO Series51.2V300Ah / HB PRO Series51.2V400Ah
Battery Type	LiFePO4 / LiFePO4 / LiFePO4
Nominal Capacity (25°C, 0.2C)	5120Wh / 10.24KWh / 15.36KWh / 20.48KWh
Voltage Range (Vdc)	44.8~58.4V / 44.8~58.4V / 44.8~58.4V / 44.8~58.4V
Fast Charge Voltage (Vdc)	57.6V / 57.6V / 57.6V / 57.6V
Low Voltage Alarm Voltage (Vdc)	46.8V / 46.8V / 46.8V / 46.8V
Net Weight (NW, kg)	46.0Kg*1 / 46.0Kg*2 / 46.0Kg*3 / 46.0Kg*4
Gross Weight (GW, kg)	50.0Kg*1 / 50.0Kg*2 / 50.0Kg*3 / 50.0Kg*4
Dimensions L×W×H (Base, mm)	703*485*95mm(7.5Kg)



RS-BAT-SLIM-51.2V200AH

Ultra-Slim Wall-Mount LiFePO4 Battery 51.2V 200Ah

51.2V 200Ah (10.24 kWh), power-wall design

Ultra-slim 120mm profile, 715×650×120mm

LCD display, CAN / RS485 / WiFi / Bluetooth BMS

100A continuous / 150A pulse discharge

KEY SPECIFICATIONS

Battery Type	LiFePO4
Nominal Capacity (25°C, 0.2C) (Ah)	200Ah
Nominal Capacity (25°C, 0.2C) (Wh)	10240Wh
Nominal Battery Voltage (Vdc)	51.2V
Fast Charge Voltage (Vdc)	56.0V
Operating Voltage Range (Vdc)	44.8~ 58.4V
Weight (NW, kg)	64Kg
Weight (GW, kg)	80Kg

Dimensions L×W×H
(Product, mm)

715*650*120mm



RS-BAT-WALL-PRO

Wall-Mount LiFePO4 Battery PRO 25.6V/51.2V

25.6V/51.2V, 100/200Ah, 2.56-10.24 kWh

Wall-mount design, IP20

150A pulse discharge, 100A continuous

RS485 / CAN BMS, major inverter compatible

KEY SPECIFICATIONS

Model	HA PRO Series25.6V100Ah / HA PRO Series25.6V200Ah / HA PRO Series51.2V100Ah / HA PRO Series51.2V200Ah
Battery Model	25.6V100Ah / 25.6V200Ah / 51.2V100Ah / 51.2V200Ah
Battery Type	LiFePO4 / LiFePO4 / LiFePO4 / LiFePO4
Nominal Capacity (25°C, 0.2C)	2560Wh / 5120Wh / 5120Wh / 10240Wh
Voltage Range (Vdc)	22.4~58.4V / 22.4~58.4V / 44.8~58.4V / 44.8~58.4V
Fast Charge Voltage (Vdc)	28.0V / 28.0V / 56.0V / 56.0V
Low Voltage Shutdown Voltage (Vdc)	23.4V / 23.4V / 46.8V / 46.8V
Weight (NW, kg)	45.7Kg / 47.2kgs / 83.9Kg / 85.4Kg
Weight (GW, kg)	52.0Kg / 53.5kgs / 107.5Kg / 109Kg



RS-BAT-WALL-PLUS

Wall-Mount LiFePO4 Battery PLUS 25.6V/51.2V

25.6V/51.2V, 100/200Ah, 2.56-10.24 kWh

Low noise < 40dB @ 1m

Up to 200A pulse / 150A continuous discharge

CAN / RS485 / RS232 smart BMS

KEY SPECIFICATIONS

Model	HA PLUS Series25.6V100Ah / HA PLUS Series25.6V200Ah / HA PLUS Series51.2V100AH / HA PLUS Series51.2V200AH
Battery Model	25.6V100AH / 25.6V200AH / 51.2V100AH / 51.2V200AH
Battery Type	LiFePO4 / LiFePO4 / LiFePO4 / LiFePO4
Nominal Capacity (25°C, 0.2C)	2560Wh / 5120Wh / 5120Wh / 10.24KWh
Voltage Range (Vdc)	22.4~29.2V / 22.4~29.2V / 44.8~58.4V / 44.8~58.4V
Fast Charge Voltage (Vdc)	28.0V / 28.0V / 55.2V / 55.2V
Weight (NW, kg)	25.0Kg / 42Kg / 44Kg / 69Kg
Weight (GW, kg)	29.0Kg / 46Kg / 49Kg / 74Kg
Dimensions L×W×H (Product, mm)	611*420*224mm / 611*420*224mm / 611*420*224mm / 780*460*166mm



RS-BAT-WALL-HA

Wall-Mount LiFePO4 Battery 25.6V/51.2V 100-200Ah

25.6V/51.2V, 100/200Ah, 2.56-10.24 kWh

Wall-mount, IP20, LCD (optional)

200A pulse (30s) discharge

CAN / RS485 / RS232 BMS

KEY SPECIFICATIONS

Model	HA-25.6V100Ah / HA-25.6V200Ah / HA-51.2V100Ah / HA-51.2V200Ah
Battery Type	LiFePO4 / LiFePO4 / LiFePO4 / LiFePO4
Nominal Capacity (25°C, 0.2C) (Ah)	100Ah / 200Ah / 100Ah / 200Ah
Nominal Battery Voltage (Vdc)	25.6V / 25.6V / 51.2V / 51.2V
Fast Charge Voltage (Vdc)	28.0V / 28.0V / 56.0V / 56.0V
Operating Voltage Range (Vdc)	22.4~ 29.2V / 22.4~ 29.2V / 44.8~ 58.4V / 44.8~ 58.4V
Weight (NW, kg)	23.2Kg / 72.6Kg / 39.7Kg / 76.0Kg
Weight (GW, kg)	25.0Kg / 76.7Kg / 42.1Kg / 83.0Kg
Dimensions L×W×H (Product, mm)	414*372*227mm / 584*580*207mm / 550*375*227mm / 606*380*265



RS-BAT-LI-DROP-IN

LiFePO4 Drop-In Replacement Battery 12.8V/25.6V

12.8V 50-200Ah / 25.6V 100-150Ah

Direct lead-acid replacement, drop-in

IP65 rated, optional Bluetooth APP monitoring

Up to 300A pulse (1s) discharge

KEY SPECIFICATIONS

Model	HD PLUS12.8V50AH / HD PLUS12.8V100AH / HD PLUS12.8V150AH / HD PLUS12.8V200AH
Nominal Battery Model	12.8V50AH / 12.8V100AH / 12.8V150AH / 12.8V200AH
Battery Type	LiFePO4 / LiFePO4 / LiFePO4 / LiFePO4
Nominal Capacity (25°C, 0.2C)	640WH / 1280WH / 1920WH / 2560WH
Voltage Window (Vdc)	11.2~ 14.6V / 11.2 ~ 14.6V / 11.2 ~ 14.6V / 11.2~ 14.6V
Bulk Charge Voltage (Vdc)	14.0V / 14.0V / 14.0V / 14.0V
Weight (NW, kg)	5.5kg / 12.0kg / 15.0kgs / 27.0Kg
Weight (GW, kg)	6.0kg / 13.0kg / 16.0kg / 28.0Kg
Dimensions L×W×H (Product, mm)	231*145*211 / 332*172*220 / 484*170*240 / 522*218*238



RS-BAT-HV-PRO

High-Voltage Stacked Storage Battery 10.2-51.2kWh

10.2-51.2 kWh, 102.4-512V high-voltage DC

51.2V 100Ah modules, 2-10 stackable

100A max charge/discharge

LCD display, CAN / RS485

KEY SPECIFICATIONS

Model	HV PRO 10.2KWh / HV PRO 15.3KWh / HV PRO 20.4KWh / HV PRO 25.6KWh
Battery Type	LiFePO4
Capacity (Ah)	10.24KWh / 15.36KWh / 20.48KWh / 25.60KWh
Voltage	102.4V / 153.6V / 204.8V / 256.0V
Voltage Window	80-116.8V / 120-175.2V / 160-233.6V / 200-292V
Net Weight	118Kg / 163Kg / 208Kg / 253Kg
Dimensions	700×500×525 / 700×500×675 / 700×500×825 / 700×500×975
Safety Standard	UN38.3,MSDS
Protection Rating	IP20



RS-BAT-SLIM-MAX

Ultra-Slim Wall-Mount LiFePO4 Battery MAX

25.6V 100Ah / 51.2V 200Ah

Ultra-slim 139mm profile, 460×360mm

100A continuous / 150A pulse discharge

LCD (optional), CAN / RS485

KEY SPECIFICATIONS

Model	HA MAX Series25.6V100Ah / HA MAX Series51.2V200Ah
Battery Type	LiFePO4 / LiFePO4
Capacity	100Ah / 50Ah
Voltage	25.6V / 51.2V
Float Charge Voltage	28.0V / 56.0V
Voltage Range	20.0~29.2V / 40.0~58.4V
Net Weight	23.2Kg / 23.2Kg
Gross Weight	25.0Kg / 25.0Kg
Product Dimensions L*W*H	460×360×139mm / 460×360×139mm



R0256

R0256 Backup UPS 700W/150W

- 700W Bidirectional Inverter
- 12V DC Input
- 230V AC Pure Sine Wave
- Offline UPS Design

KEY SPECIFICATIONS

Model	R0256
SupplierModel	R0187
AC Output Rated Power	700W
AC Output-Efficiency	≥89%
DC Output(Charging)-Efficiency	≥90%
DC Input-Rated Voltage	12Vdc
DC Input-Voltage Range	10.5~14Vdc
AC Output Rated Voltage	230Vac
AC Output-Voltage Regulation Accuracy	±5%



R0263

R0263 Backup UPS 1.4KW/600W

1.4KW Inverter

24V DC Input

230V AC Pure Sine Wave

Offline UPS Design

KEY SPECIFICATIONS

Model	R0263
SupplierModel	R0123B
AC Output Rated Power	1.4KW
AC Output-Efficiency	≥89%
DC Output(Charging)-Efficiency	≥90%
DC Input-Rated Voltage	24Vdc
DC Input-Voltage Range	21~28Vdc
AC Output Rated Voltage	230Vac
AC Output-Voltage Regulation Accuracy	±5%




R0212

R0212 UPS 3000VA/2.4KW

- 3000VA/2.4KW Online UPS
- 208-240V HV Range
- VRLA 12V Battery Support
- Pure Sine Wave Output

KEY SPECIFICATIONS

Rated Power (Rated W)	2.4KW
Battery Type (Battery Type)	VRLA 12V
RatedRated Capacity (VA)	3000VA
Battery Capacity	7AH / 9AH
Efficiency-Utility PowerMode (Line Mode)	>88%
Efficiency - Battery Mode	>83%
Output Voltage (Output Voltage)	208/220/230/240V (HV)
Output Voltage Accuracy (Voltage Accuracy)	±1%
VoltageDistortionTHD% (Non-linearLoad)	<7%

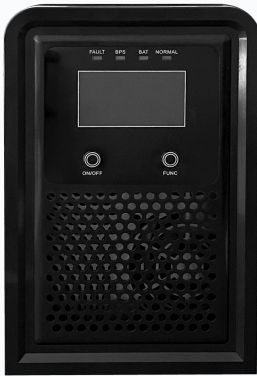


R0212C

R0212C UPS 3000VA/2.4KW Class 2

- 3000VA/2.4KW Class 2 UPS
- 208-240V HV Range
- Class 2 Safety Certified
- VRLA 12V Battery Ready

KEY SPECIFICATIONS

Rated Power (Rated W)	2.4KW
Battery Type (Battery Type)	VRLA 12V
RatedRated Capacity (VA)	3000VA
Battery Capacity	7AH / 9AH
Efficiency-Utility PowerMode (Line Mode)	>88%
Efficiency - Battery Mode	>83%
Output Voltage (Output Voltage)	208/220/230/240V (HV)
Output Voltage Accuracy (Voltage Accuracy)	±1%
VoltageDistortionTHD% (Non-linearLoad)	<7%

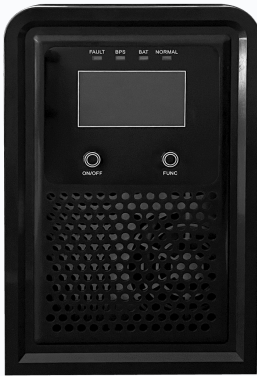

R0296

R0296 UPS 1000VA/800W

1000VA/800W Online UPS

208-240V HV Range

VRLA 12V Battery Support

Stable Pure Sine Wave

KEY SPECIFICATIONS

Rated Power (Rated W)	800W
Battery Type (Battery Type)	VRLA 12V
RatedRated Capacity (VA)	1000VA
Battery Capacity	7AH / 9AH
Efficiency-Utility PowerMode (Line Mode)	>88%
Efficiency - Battery Mode	>82%
Output Voltage (Output Voltage)	208/220/230/240V (HV)
Output Voltage Accuracy (Voltage Accuracy)	±3%
VoltageDistortionTHD% (Non-linearLoad)	<10%



R0296A

R0296A UPS 1000VA/800W Medical Grade

- 1000VA/800W Medical UPS
- 208-240V HV Range
- Medical Grade Safety
- VRLA 12V Battery

KEY SPECIFICATIONS

Rated Power (Rated W)	800W
Battery Type (Battery Type)	VRLA 12V
RatedRated Capacity (VA)	1000VA
Battery Capacity	7AH / 9AH
Efficiency-Utility PowerMode (Line Mode)	>88%
Efficiency - Battery Mode	>82%
Output Voltage (Output Voltage)	208/220/230/240V (HV)
Output Voltage Accuracy (Voltage Accuracy)	±3%
VoltageDistortionTHD% (Non-linearLoad)	<10%




R0358

R0358 UPS 3000VA/2.4KW

- 3000VA/2.4KW Online UPS
- 208-240V HV Range
- VRLA 12V Battery Support
- High Efficiency Design

KEY SPECIFICATIONS

Rated Power (Rated W)	2.4KW
Battery Type (Battery Type)	VRLA 12V
RatedRated Capacity (VA)	3000VA
Battery Capacity	7AH / 9AH
Efficiency-Utility PowerMode (Line Mode)	>88%
Efficiency - Battery Mode	>85%
Output Voltage (Output Voltage)	208/220/230/240V (HV)
Output Voltage Accuracy (Voltage Accuracy)	±3%
VoltageDistortionTHD% (Non-linearLoad)	<10%

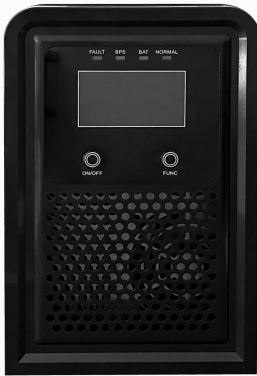

R0358A

R0358A UPS 3000VA/2.4KW Medical Grade

- 3000VA/2.4KW Medical UPS
- 208-240V HV Range
- Medical Grade Approval
- VRLA 12V Battery

KEY SPECIFICATIONS

Rated Power (Rated W)	2.4KW
Battery Type (Battery Type)	VRLA 12V
RatedRated Capacity (VA)	3000VA
Battery Capacity	7AH / 9AH
Efficiency-Utility PowerMode (Line Mode)	>88%
Efficiency - Battery Mode	>85%
Output Voltage (Output Voltage)	208/220/230/240V (HV)
Output Voltage Accuracy (Voltage Accuracy)	±3%
VoltageDistortionTHD% (Non-linearLoad)	<10%



RP020

RP020 PoE Injector 12W Wall Plug 24V

- 12W Single Port PoE
- 24V DC Output
- 802.3af Compatible
- Compact Wall Plug Design

KEY SPECIFICATIONS

Model	RP020-2400500EUG
Rated Power (Rated Power)	12W
Efficiency (Efficiency)	≥82.96% (VI)
Output Voltage (Output Voltage)	24V±5%
Input Voltage Range (Input Voltage)	90~264Vac (100~240Vac)
Over Current Protection (OCP)	Yes
Operating Temperature (Operating Temp)	0°C~40°C
Product Type	PoE
Client	Yaojin



R0240

R0240 PoE Power Supply 15.36W Wall Plug 48V

15.36W PoE Power Adapter

48V DC Output

Gigabit Ethernet Compatible

Compact Wall Plug Design

KEY SPECIFICATIONS

Model	R0240-4800320EUE
Rated Power (Rated Power)	15.36W
Efficiency (Efficiency)	≥84.25% (VI)
Output Voltage (Output Voltage)	48V±5%
Input Voltage Range (Input Voltage)	90~264Vac (100~240Vac)
Weight (Weight)	100±5g
Dimensions (Dimension)	83.3×45.9×33.4mm
Over Current Protection (OCP)	0.64A Max
Operating Temperature (Operating Temp)	-10°C~40°C



RP015W01

RP015W01 PoE Injector 15W Wall Plug 48V

15W Single Port PoE

IEEE 802.3af Compliant

Gigabit Data Rate

Compact Wall Mount

KEY SPECIFICATIONS

Model	RP015
Rated Power (Rated Power)	15.36W
Efficiency (Efficiency)	VI
Output Voltage (Output Voltage)	48V±5%
Input Voltage Range (Input Voltage)	100~240Vac
Over Current Protection (OCP)	Yes
Operating Temperature (Operating Temp)	0°C~40°C
Product Type	PoE
Client	(Edimax)



RP018

RP018 PoE Switch 12W Wall Plug 24V

- 12W PoE Switch
- 24V DC Output
- 802.3af Compatible
- Slim Wall Plug Design

KEY SPECIFICATIONS

Model	RP018-2400500CN
Rated Power (Rated Power)	12W
Efficiency (Efficiency)	≥77.76% (V)
Output Voltage (Output Voltage)	24V±5%
Input Voltage Range (Input Voltage)	90~264Vac (100~240Vac)
Over Current Protection (OCP)	Yes
Operating Temperature (Operating Temp)	0°C~40°C
Product Type	PoE
Client	Tuoda



RP023

RP023 PoE Injector 12W Desktop 24V

- 12W PoE Injector
- IEEE 802.3af Compliant
- Metal Enclosure
- Plug and Play

KEY SPECIFICATIONS

Model	RP023-2400500YG
Rated Power (Rated Power)	12W
Efficiency (Efficiency)	≥82.96% (VI)
Output Voltage (Output Voltage)	24V±5%
Input Voltage Range (Input Voltage)	90~264Vac (100~240Vac)
Over Current Protection (OCP)	0.6~1.1A
Operating Temperature (Operating Temp)	0°C~40°C
Product Type	PoE
Client	Baicells



R0046

R0046 PoE Power Supply 80W Desktop 56V

80W PoE Power Supply

56V DC Output

IEEE 802.3bt Ready

3-Pin Integrated Design

KEY SPECIFICATIONS

Model	R0046A-5601500
Rated Power (Rated Power)	80W
Efficiency (Efficiency)	≥88.00% (VI)
Output Voltage (Output Voltage)	56V±5%
Input Voltage Range (Input Voltage)	90~264Vac (100~240Vac)
Over Current Protection (OCP)	1.6~3A
Operating Temperature (Operating Temp)	0°C~40°C
Product Type	PoE
Client	Ruijie



RP024

RP024 PoE+ Injector 24W Desktop 48V

- 24W PoE+ Injector
- Non-Standard PoE 48V
- Gigabit Ethernet
- Plug-and-Play

KEY SPECIFICATIONS

Model	RP024W01-4800500YG
Rated Power (Rated Power)	24W
Efficiency (Efficiency)	≥86.2% (VI)
Output Voltage (Output Voltage)	48V±5%
Input Voltage Range (Input Voltage)	90~264Vac (100~240Vac)
Over Current Protection (OCP)	Yes
Operating Temperature (Operating Temp)	0°C~40°C
Product Type	PoE
Client	(Edimax)



RP025-RP015

RP025 PoE Adapter 30W Desktop 48V

- 30W PoE Adapter
- IEEE 802.3at Compliant
- Compact and Reliable
- Universal AC Input

KEY SPECIFICATIONS

Model	RP025-4800625YE
Rated Power (Rated Power)	30W
Efficiency (Efficiency)	≥86.95% (VI)
Output Voltage (Output Voltage)	48V±5%
Input Voltage Range (Input Voltage)	90~264Vac (100~240Vac)
Over Current Protection (OCP)	Yes
Operating Temperature (Operating Temp)	0°C~35°C
Product Type	PoE
Client	(ASUS)



RP026-RP029-RP030W01

RP026 PoE+ Switch 60W Desktop 48V

- 60W PoE+ Switch
- IEEE 802.3at Standard
- High Efficiency >85%
- Compact Desktop Design

KEY SPECIFICATIONS

Model	RP026-4801250YG
Rated Power (Rated Power)	60W
Efficiency (Efficiency)	≥87.0% (V)
Output Voltage (Output Voltage)	48V±5%
Input Voltage Range (Input Voltage)	90~264Vac (100~240Vac)
Over Current Protection (OCP)	Yes
Operating Temperature (Operating Temp)	0°C~40°C
Product Type	PoE
Output Current (Output Current)	1.25A



RP028

RP028 PoE Injector 12W Desktop 24V

- 12W PoE Injector
- IEEE 802.3af Compliant
- Wide Input Range
- Compact Desktop Design

KEY SPECIFICATIONS

Model	RP028-2400500Z
Rated Power (Rated Power)	12W
Efficiency (Efficiency)	≥82.96% (VI)
Output Voltage (Output Voltage)	24V±5%
Input Voltage Range (Input Voltage)	90~264Vac (100~240Vac)
Over Current Protection (OCP)	Yes
Operating Temperature (Operating Temp)	0°C~40°C
Product Type	PoE
Client	Ruilian



RP030W02

RP030W02 PoE++ Injector 30W Desktop 53V

- 30W PoE++ Injector
- 802.3af/at Compliant
- 2.5G High Speed
- Plug and Play Design

KEY SPECIFICATIONS

Model	RP030W01-5300560YE
Rated Power (Rated Power)	29.68W
Efficiency (Efficiency)	≥80%
Output Voltage (Output Voltage)	53V±5%
Input Voltage Range (Input Voltage)	90~264Vac (100~240Vac)
Over Current Protection (OCP)	0.6~1.1A
Operating Temperature (Operating Temp)	0°C~40°C
Product Type	PoE
Client	Taiwan Client



R0327-5401750

R0327 Industrial Fiber PoE 54V 1.75A 94.5W Desktop

- 54V 1.75A 94.5W Output
- Gigabit Industrial Fiber PoE
- SFP Fiber Uplink Port
- 40°C~55°C Wide Temperature

KEY SPECIFICATIONS

Model	R0327-5401750
Rated Power (Rated Power)	94.5W
Efficiency (Efficiency)	≥80%
Output Voltage (Output Voltage)	54V±5% (51.3~56.7V)
Input Voltage Range (Input Voltage)	90~264Vac (100~240Vac)
Dielectric Withstand Voltage (Hi-Pot)	3000VAC / 10mA / 1min
Weight (Weight)	870±20g
Dimensions (Dimensions)	203×130×41mm
Over Current Protection (OCP)	2.5~4A



R0260

R0260 PoE Protector 100W Rackmount 24-Port

- 24-Channel PoE Surge Protector
- 100W Max Output Power
- Industrial Outdoor Rated
- RJ45 ×24 Ports

KEY SPECIFICATIONS

Model	R0260
Rated Power (Rated Power)	100W
Input Voltage Range (Input Voltage)	48~57Vdc
Over Current Protection (OCP)	Yes
Operating Temperature (Operating Temp)	-40°C~+80°C
Product Type	PoE (24)
Client	UI
Input Current (Input Current)	≤2A
Connector	RJ45 ×24



R0255

R0255 PoE Extender 32.4W Rackmount Industrial

Industrial PoE Extender

RJ45 Dual Port

Outdoor Rated IP65

-20°C to +50°C Operating

KEY SPECIFICATIONS

Model	R0255
Rated Power (Rated Power)	32.4W
Input Voltage Range (Input Voltage)	48~57Vdc
Over Current Protection (OCP)	Yes
Operating Temperature (Operating Temp)	-20°C~+50°C
Product Type	PoE
Client	Self-developed
Input Current (Input Current)	≤1.2A
Connector	RJ45 ×2

OEM / ODM Manufacturing Partners

- ◆ Inverter bare boards and power stages, built to your spec
- ◆ Open-frame power supplies: 12W to 1500W (industrial -20°C to 70°C)
- ◆ Digital high-power supplies: 1000W-40KW, Vienna PFC
- ◆ White-label / private-label finished units on request
- ◆ Fully-owned Vietnam factory for non-China supply chain
- ◆ ISO 9001/14001/45001 · CE/CB/UL/EN 50549-1

Risunic Technology

POE Power · Adapters · Open Board PSU · UPS · Inverters · Portable ESS · All-in-One
erich.xu@risunicpower.com · www.risunicpower.com · www.risunic.com

WeChat **xmx_0888**

WhatsApp **+86 135 1076 8009**

OEM/ODM · Global Shipping · Certified