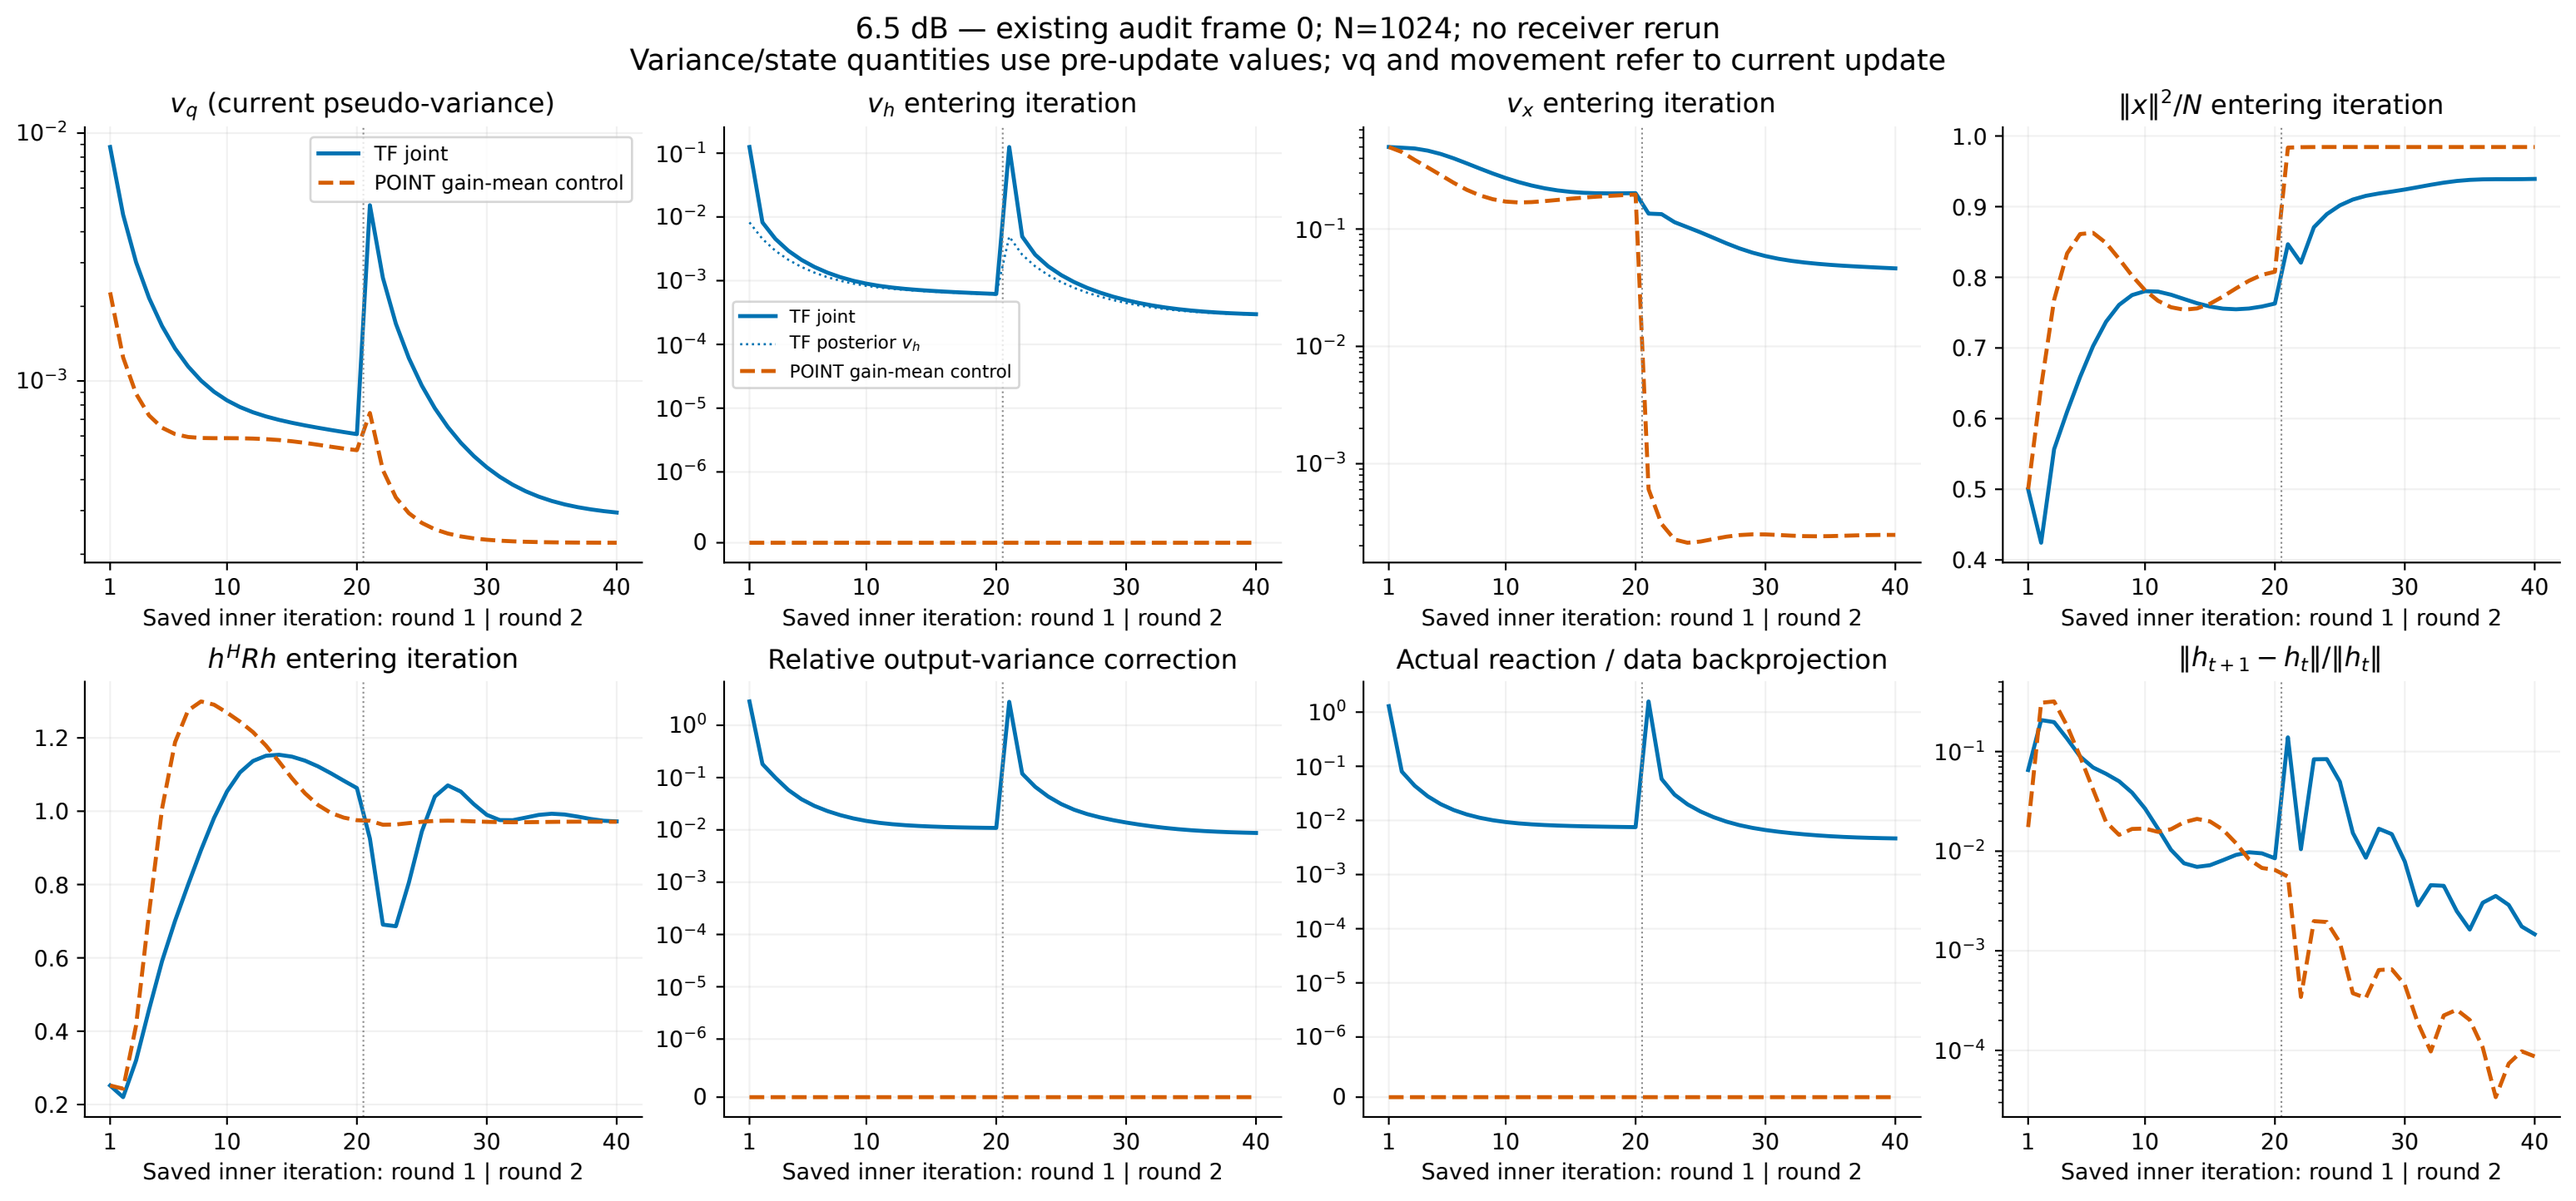
6.5 dB — existing audit frame 0; N=1024; no receiver rerun
Variance/state quantities use pre-update values; vq and movement refer to current update
v_q (current pseudo-variance)
TF joint
POINT gain-mean control
v_h entering iteration
TF joint
TF posterior v_h
POINT gain-mean control
v_x entering iteration
$\|x\|^2/N$ entering iteration
$h^H R h$ entering iteration
Relative output-variance correction
Actual reaction / data backprojection
$\|h_{t+1} - h_t\|/\|h_t\|$
Saved inner iteration: round 1 | round 2