


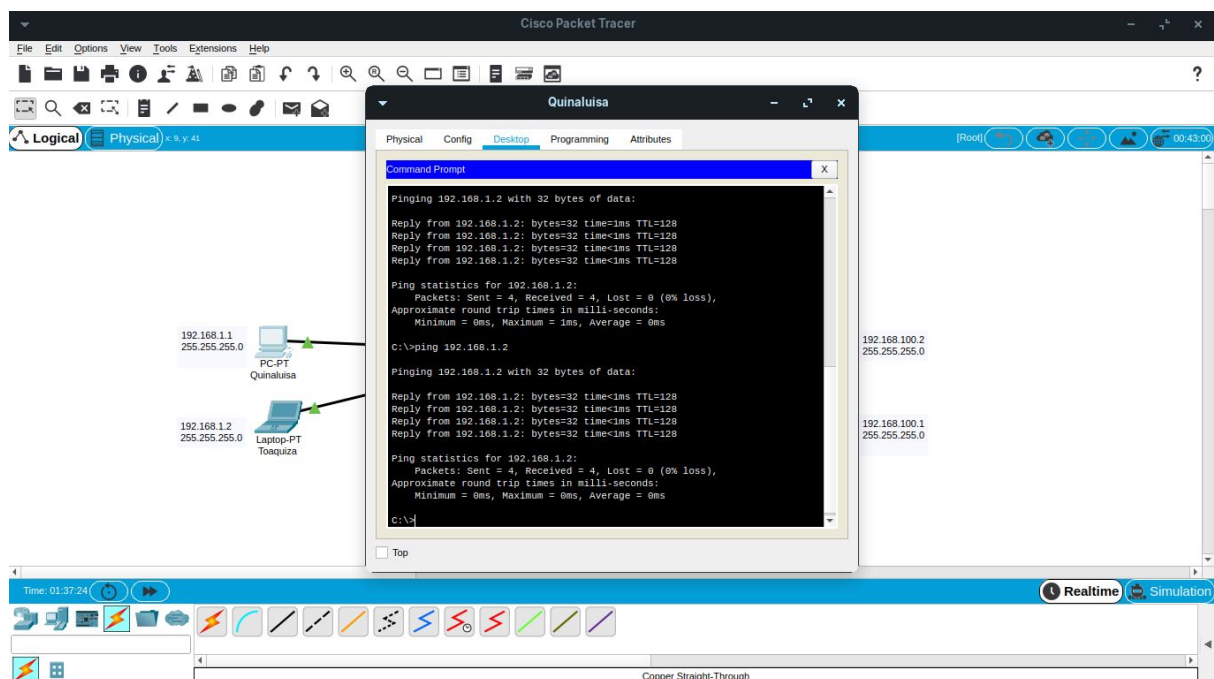
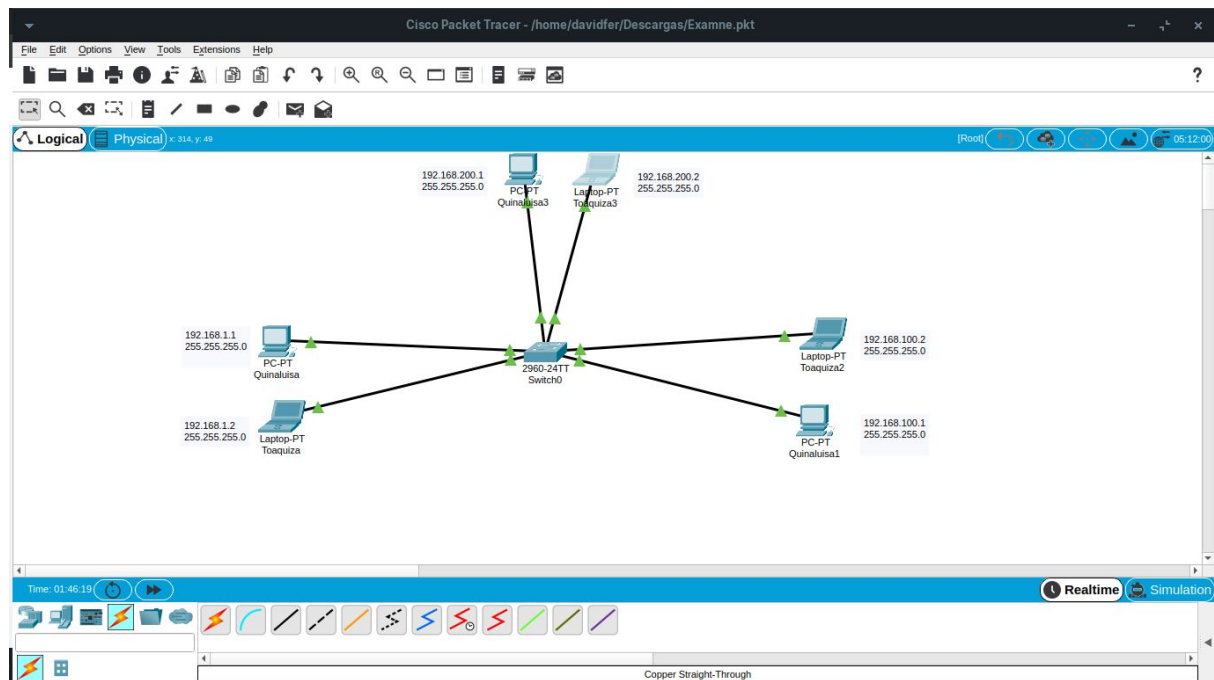


## David Quinaluisa

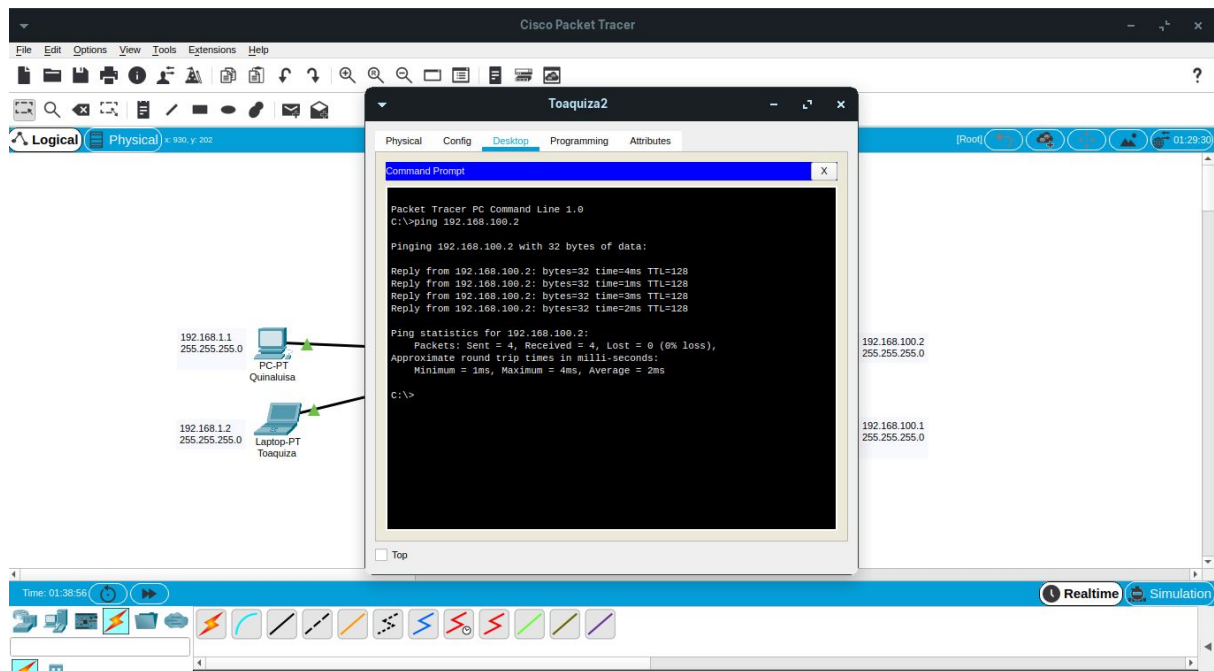

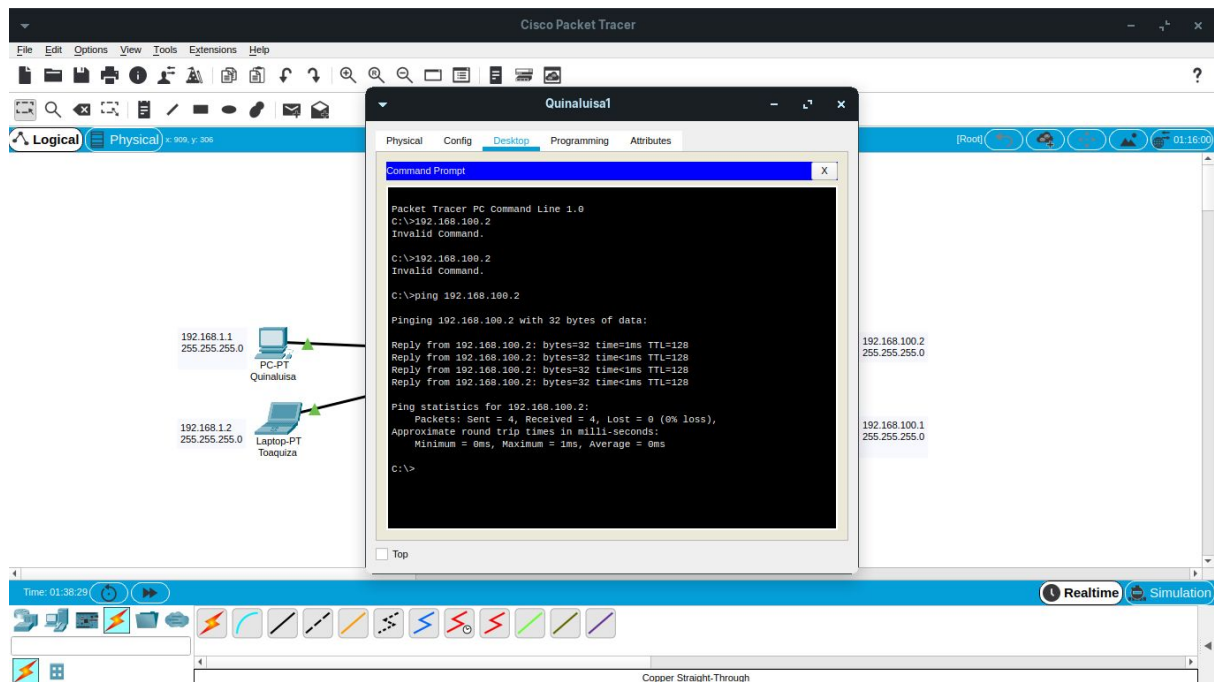

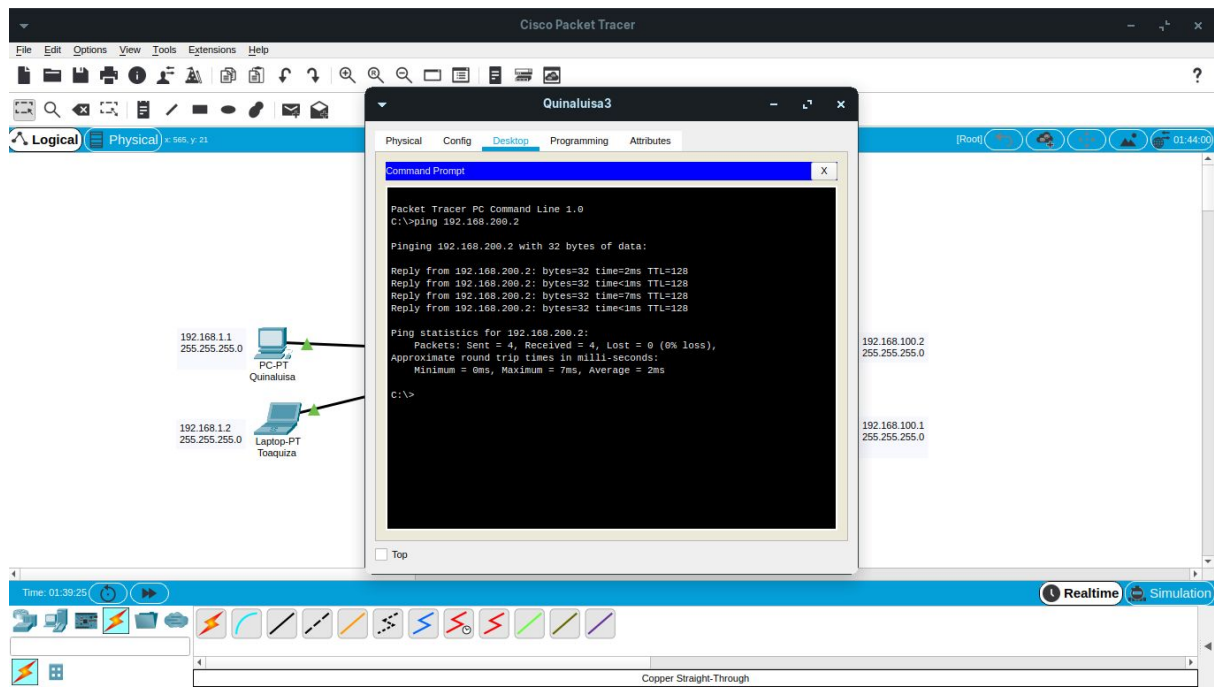

Cisco Packet Tracer

File Edit Options View Tools Extensions Help

Logical Physical x: 670, y: 28

Physical Config Desktop Programming Attributes

Command Prompt

```
Packet Tracer PC Command Line 1.0
C:\>ping 192.168.200.1

Pinging 192.168.200.1 with 32 bytes of data:

Reply from 192.168.200.1: bytes=32 time=4ms TTL=128
Reply from 192.168.200.1: bytes=32 time<1ms TTL=128
Reply from 192.168.200.1: bytes=32 time<1ms TTL=128
Reply from 192.168.200.1: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.200.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 4ms, Average = 1ms
C:\>
```

192.168.1.1  
255.255.255.0  
PC-PT  
Quinaluisa

192.168.1.2  
255.255.255.0  
Laptop-PT  
Toaquiza

192.168.100.2  
255.255.255.0

192.168.100.1  
255.255.255.0

Time: 01:40:11

Realtime Simulation

Copper Straight-Through

Cisco Packet Tracer

File Edit Options View Tools Extensions Help

Logical Physical x: 367, y: 298

Physical Config Desktop Programming Attributes

Command Prompt

```
Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.1

Pinging 192.168.1.1 with 32 bytes of data:

Reply from 192.168.1.1: bytes=32 time<1ms TTL=128
Reply from 192.168.1.1: bytes=32 time<1ms TTL=128
Reply from 192.168.1.1: bytes=32 time<1ms TTL=128
Reply from 192.168.1.1: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>
```

192.168.1.1  
255.255.255.0  
PC-PT  
Quinaluisa

192.168.1.2  
255.255.255.0  
Laptop-PT  
Toaquiza

192.168.100.2  
255.255.255.0

192.168.100.1  
255.255.255.0

Time: 01:38:05

Realtime Simulation

Copper Straight-Through