BYB TECH TELEMETRY

Description

ACQUISITION UNIT V3 and V3 PRO

BYB Telemetry V3 is a professional data acquisition system designed to log suspension and other dynamic data through a set of sensors. The acquisiton unit can be directly installed on the handlebar through a set of provided mounting brackets. By installing the unit on the handlebar/ frame, the user is able to acquire data about the vibrations and the shock perceived by the rider. It's possible to install the unit anywhere.
The system is powerfull, easy to install, lightweight and ready to be configured for custom purposes. It's possible to acquire data from third-party sensors: please get in touch to us to verify the compatibility.

The acquisition unit is manufactured in two different configurations:



V3 PRO



V3

© BYB TECH

DATASHEET

TELEMETRY

Details And Specifications


BYB Telemetry V3 PRO main new features.

Channels	5 indipendent channels
Available sensors	BYB Telemetry sensors and 3rd party sensors (within electrical spec.)
Custom sensors	Yes, contact us to verify the compatibility
Sensor calibration	Automatic or manual
Wireless sensors	Yes, commercial heart rate and cycling power meter sensors
Lap timing	Yes, able to detect BYB Chrono external triggers (start/finish and splits)
Accelerometer	Built-in 3 axis accelerometer (±16g)
Gyroscope	Built-in 3 axis gyroscope (±1000 deg/s)
GPS	Built-in automotive-grade GPS module (±1m) with external high sensitive antenna
BYB mode	Available modes: MTB, MX, QUAD, CAR, OPEN
Sampling rate	1000 Hz (on each channel)
Sampling mode	Three pre-configured sampling modes (digital, analog and pressure)
Auto pause	Yes, based on movement detection and/or minimum speed
Accuracy	1%
Internal memory	4 Gb
Buttons	Multifunction buttons (power and run)
LEDs	Multifunction leds (power and run)
GPS fix inicator	Yes
Battery	Rechargeable internal battery
Battery-life (sampling)	+10 hours of continuos sampling
Battery-life (sleep)	300 days
Battery charge time	3 hours
Battery charging led	Yes
Charging connectors	Micro-USB
Sensor connectors	5 pin female, IP67 waterproof
Waterproof	Yes
Material	Plastic
Dimensions	80x50x40 mm (Including connector's footprint)
Weight	80g
Mounting brackets	One pair included

© BYB TECH

TELEMETRY

Drawings

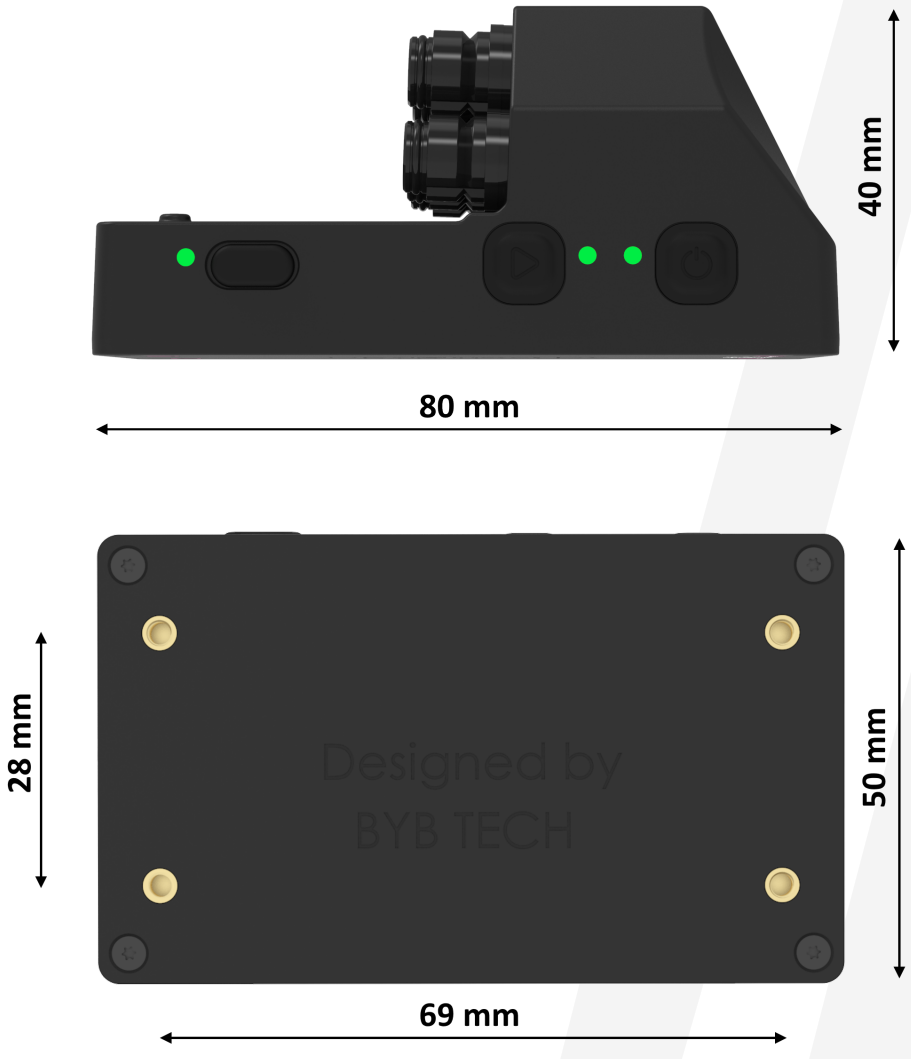

V3 PRO

© BYB TECH

TELEMETRY

Pinout

This is the typical connection diagram for the MTB and MX mode. The channel mapping can be customized by the user. Please, consult the user manual to learn more about the connection for the other available modes.

1 - Suspension 1
2 - Suspension 2
3 - Speed sensor
4 - Front brake
5 - Rear brake



V3 PRO

© BYB TECH

DATASHEET

TELEMETRY

Details And Specifications


BYB Telemetry V3 main new features.

Channels	2 indipendent channels
Available sensors	BYB Telemetry sensors (Fork and shock)
Custom sensors	No
Sensor calibration	Automatic
Wireless sensors	No
Lap timing	No
Accelerometer	Built-in 3 axis accelerometer (±16g)
Gyroscope	Built-in 3 axis gyroscope (±1000 deg/s)
GPS	Built-in automotive-grade GPS module (±1m) with external high sensitive antenna
BYB mode	Available modes: MTB, MX
Sampling rate	250 Hz (on each channel)
Auto pause	Yes, based on movement detection and/or minimum speed
Accuracy	1%
Internal memory	2 Gb
Buttons	Multifunction buttons (power and run)
LEDs	Multifunction leds (power and run)
GPS fix inicator	Yes
Battery	Rechargeable internal battery
Battery-life (sampling)	+9 hours of continuos sampling
Battery-life (sleep)	250 days
Battery charge time	2.5 hours
Battery charging led	Yes
Charging connectors	Micro-USB
Sensor connectors	5 pin female, IP67 waterproof
Waterproof	Yes
Material	Plastic
Dimensions	80x50x40 mm (Including connector's footprint)
Weight	75g
Mounting brackets	One pair included

© BYB TECH

BYB TECH TELEMETRY

Drawings

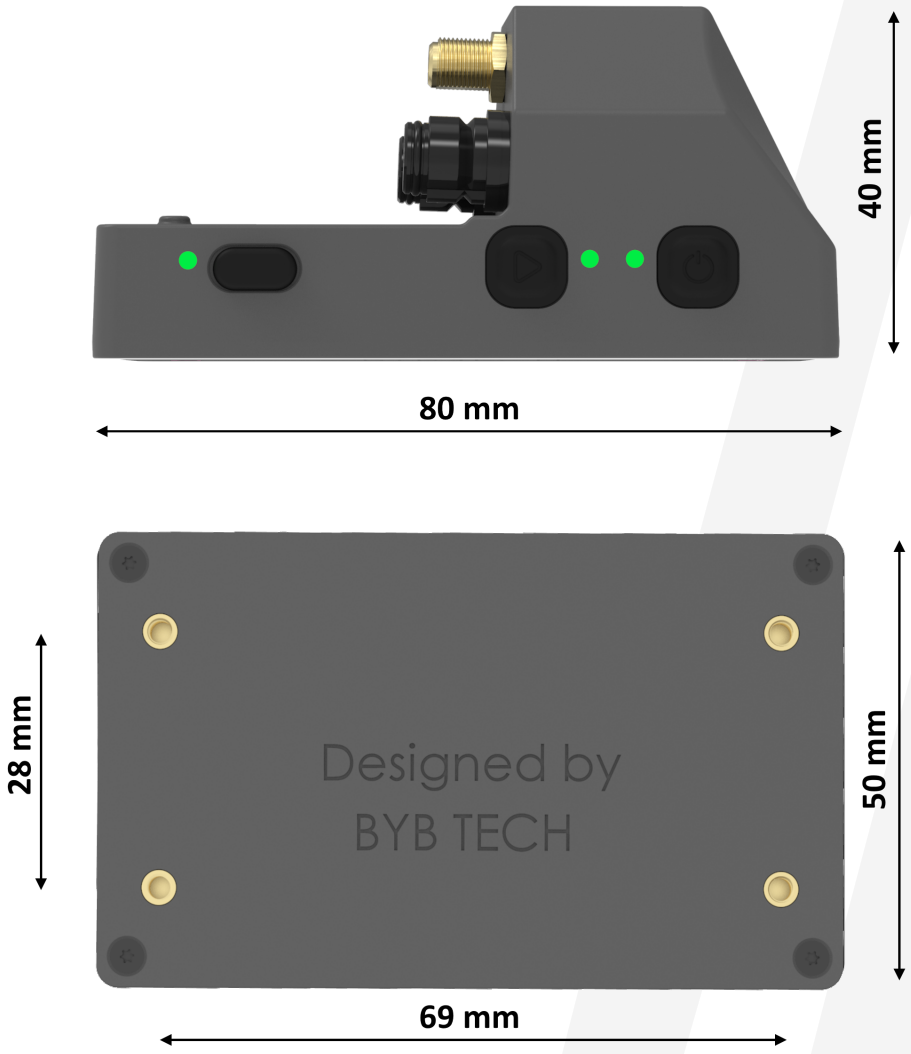

V3

© BYB TECH

BYB TECH TELEMETRY

Pinout

This is the typical connection diagram for the MTB and MX mode.

1 - Suspension 1 (fork)
2 - Suspension 2 (shock)



V3

© BYB TECH