



PIN HEADERS

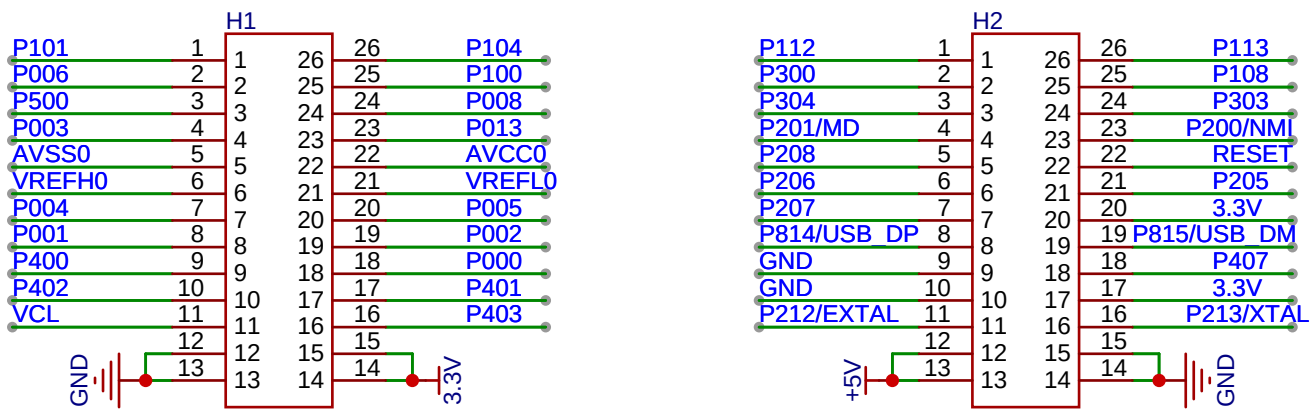


PMOD



SPI/UART/I2C

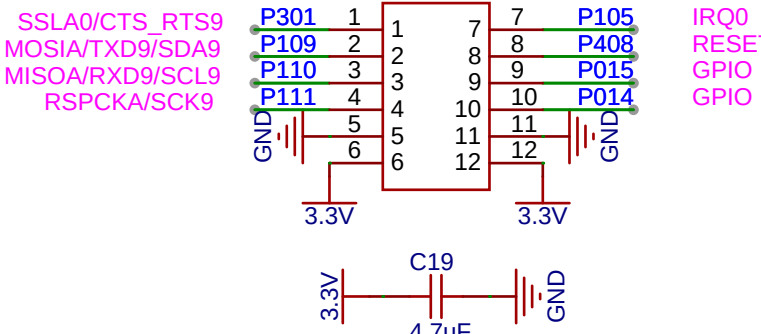


SPI/UART/I2C

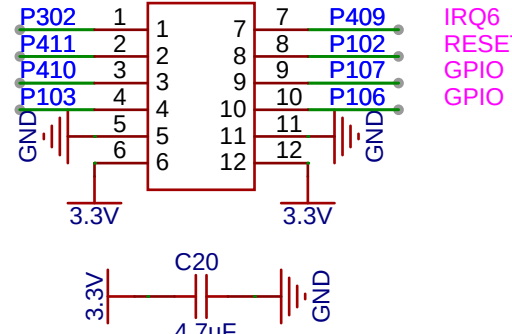

POWER/UART

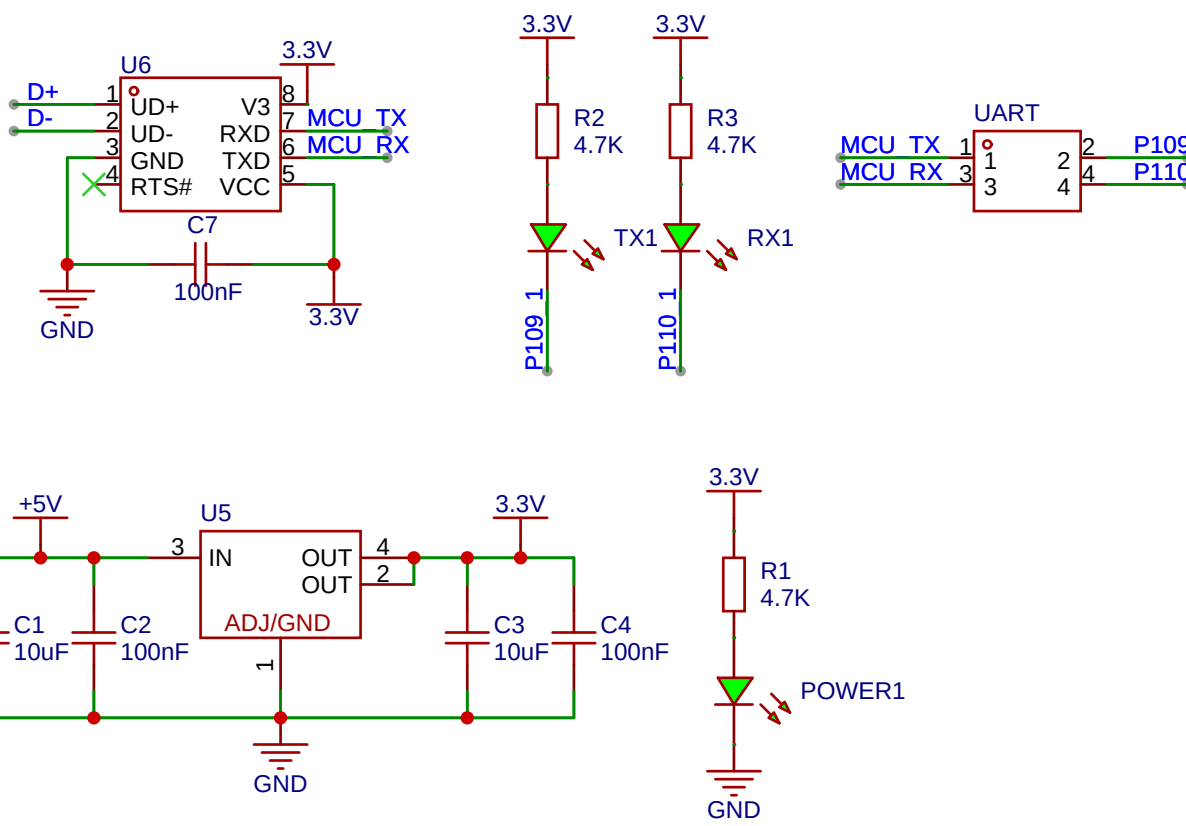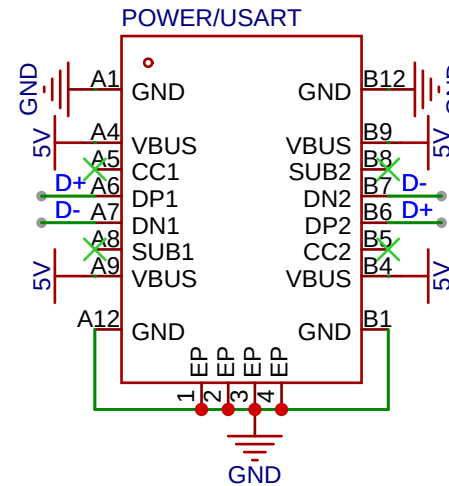


I3C


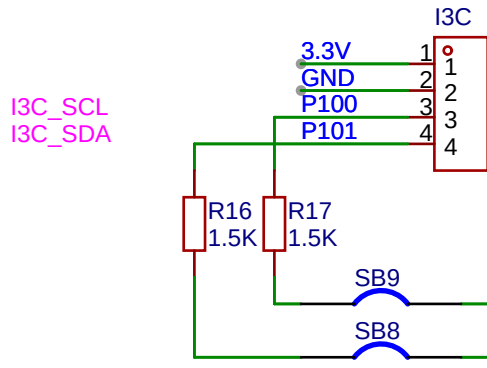


For I2C operation, set P205 and P206 outputs driven high (pull-ups enabled)
For I3C operation, set P205 and P206 to inputs (pull-ups disabled)
I2C bus pull-ups R16 and R17 are controlled by P205 and P206. When the bus is configured as I2C, then these two pull-ups should be enabled by driving P205 and P206 high. If P205 and P206 are required for other purposes, then they can be isolated by cutting trace-cut jumpers SB8 and SB9 respectively.


MCU MODE CONFIG

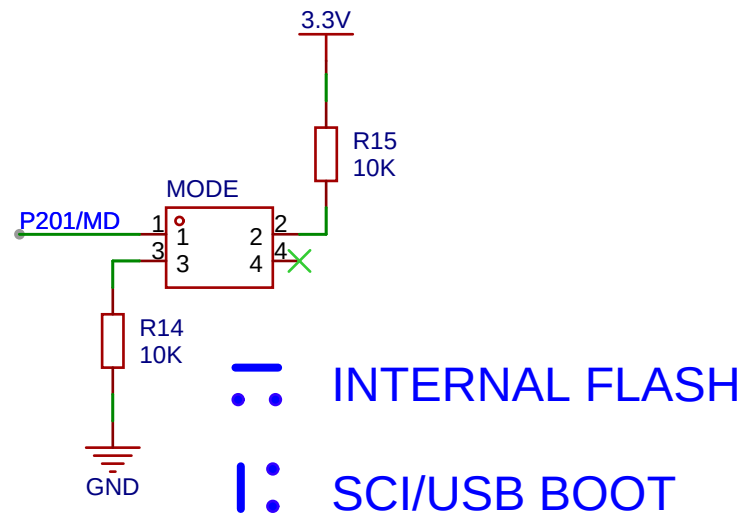


USB

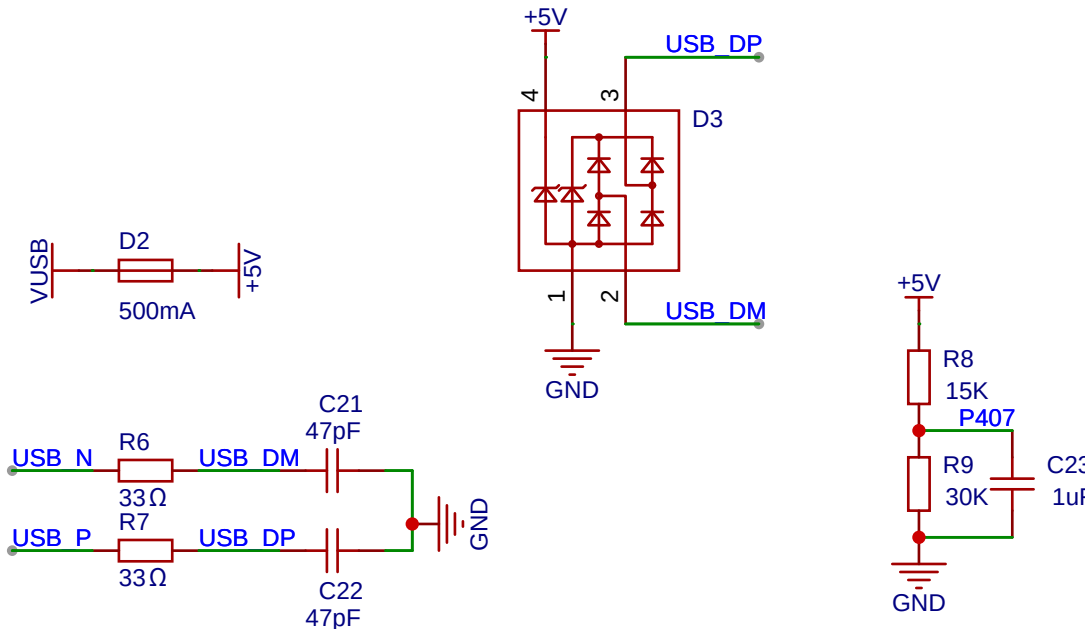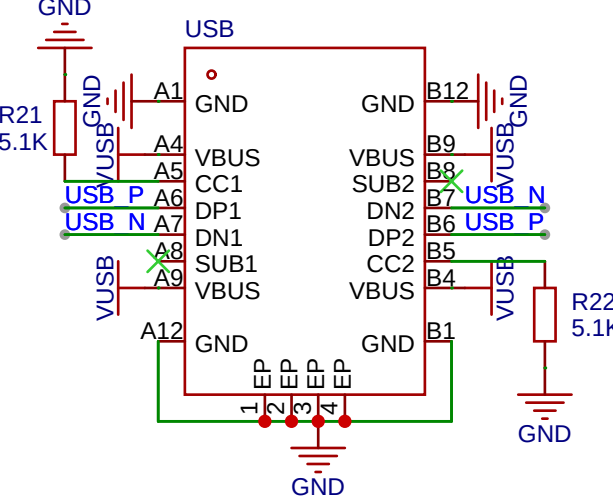


RESET BUTTON

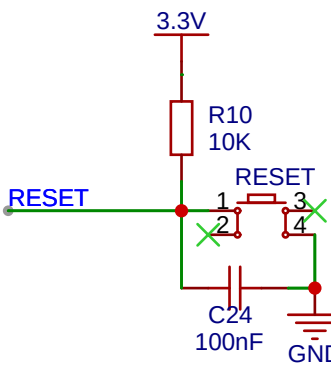


USER BUTTONS

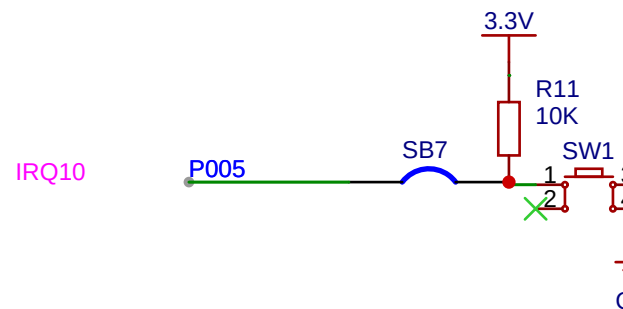



LED

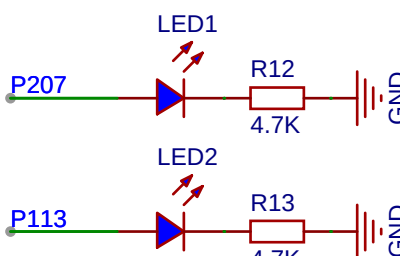

SWD

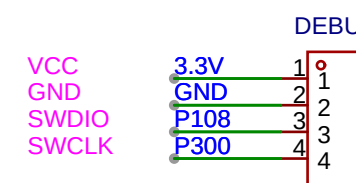

CAN

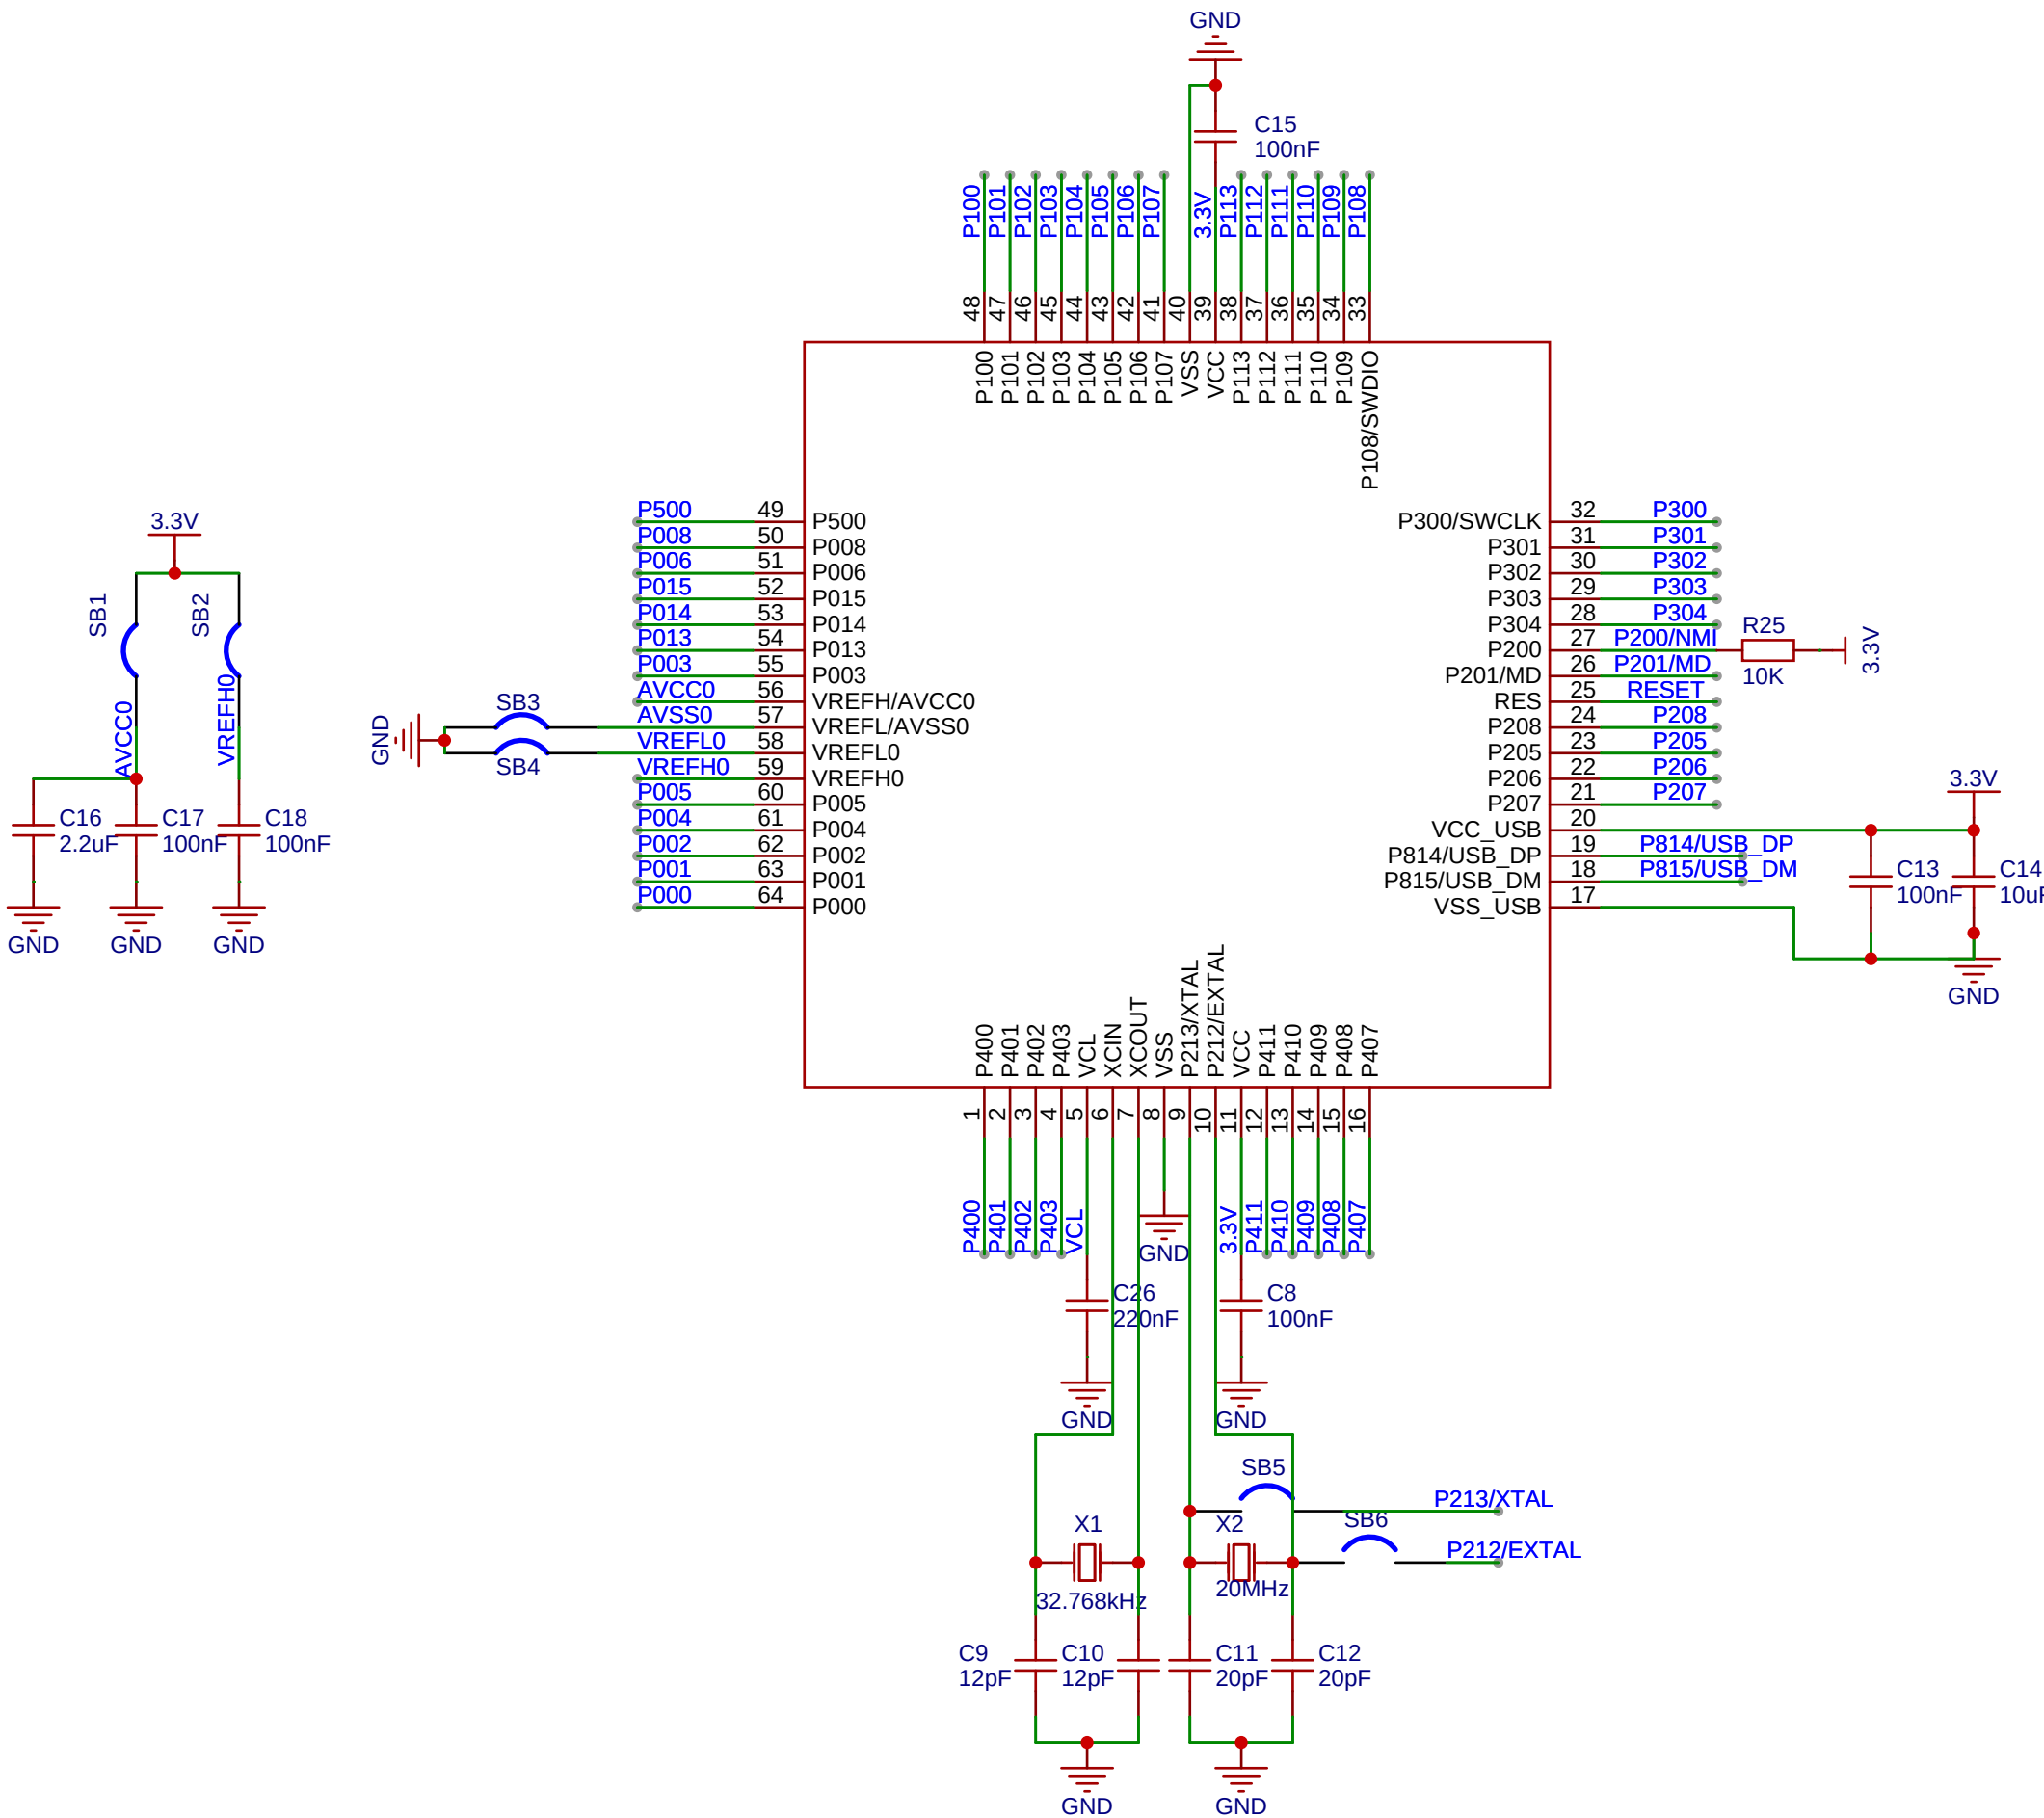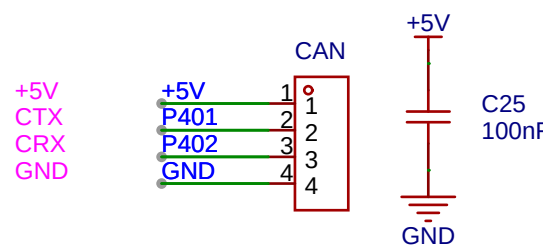

Schematic	Schematic1			Update Date	2023-04-27	
				Create Date		
Page	P1			Part Number		
Drawed		RA4E2_RA6E2_64PIN				
Reviewed						
		VER	SIZE	PAGE	1	OF 1
		V1.0				