

A

B

C

D

A

B

C





D

1

2

3

4

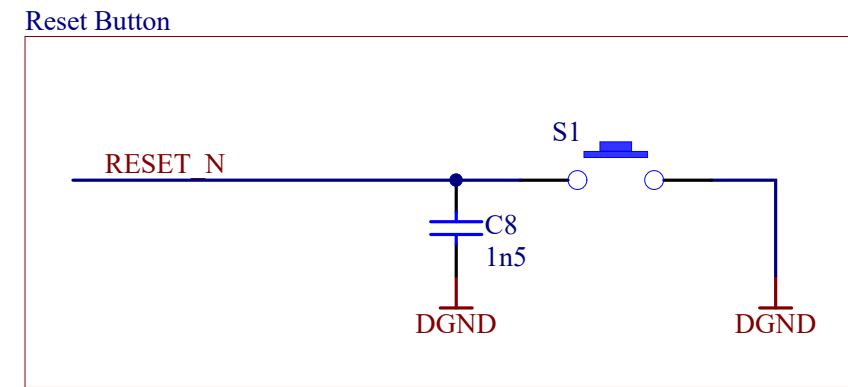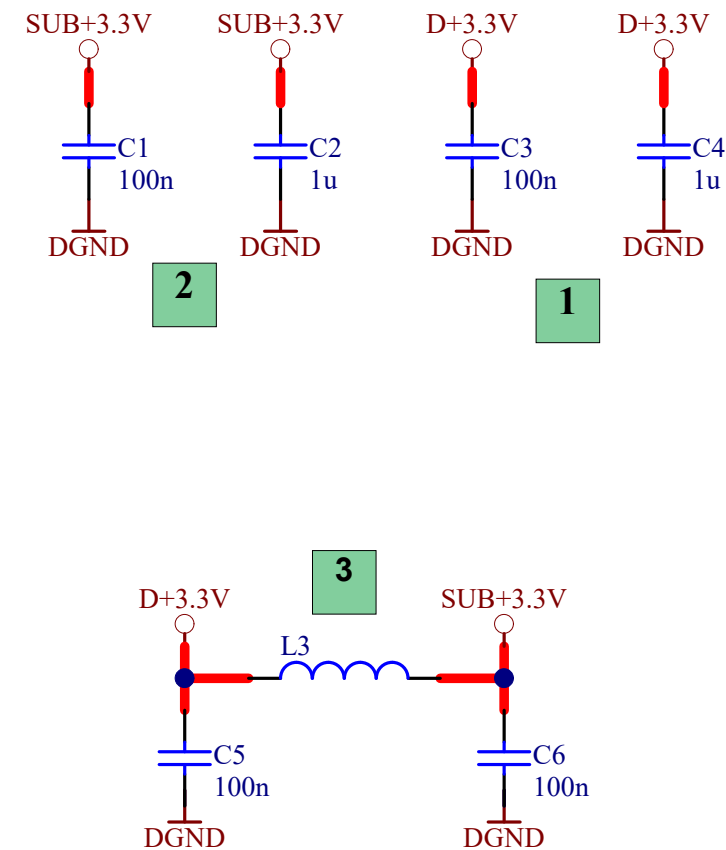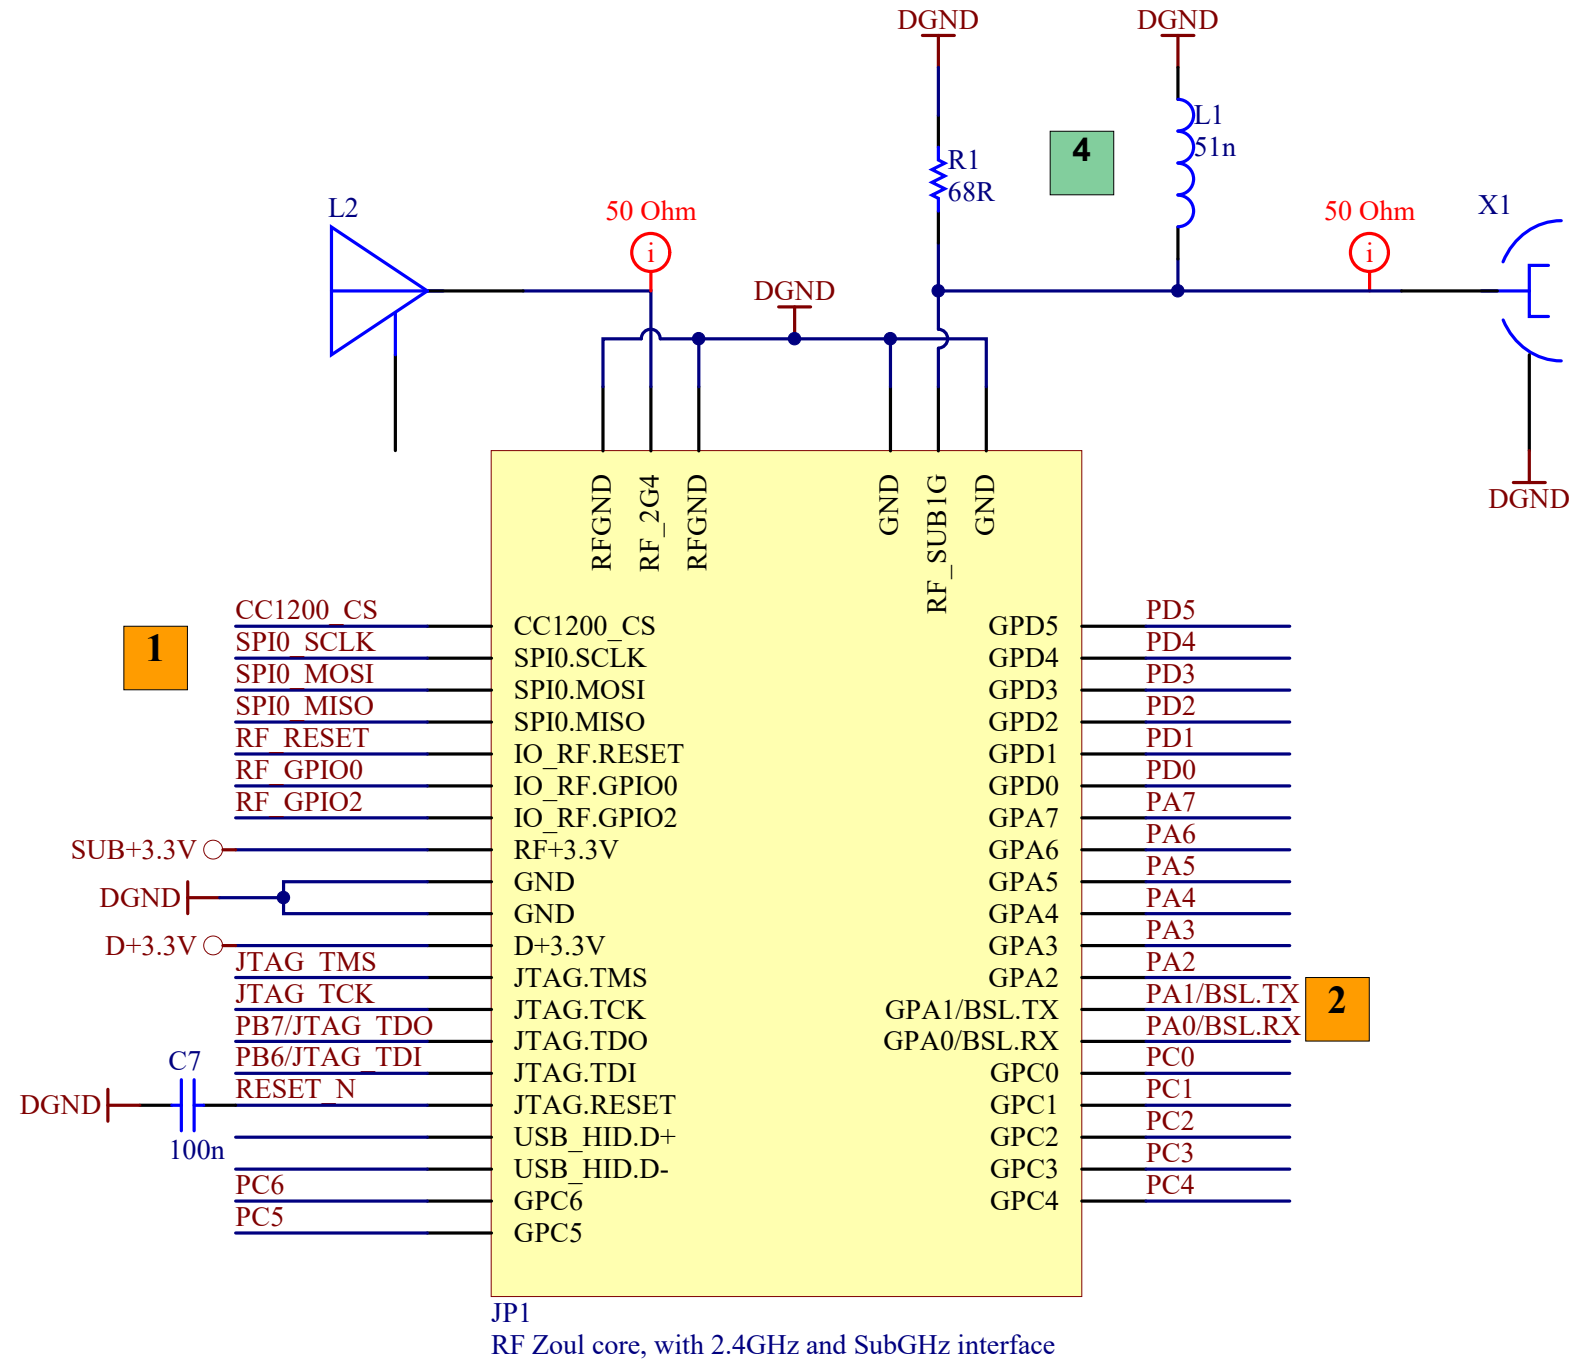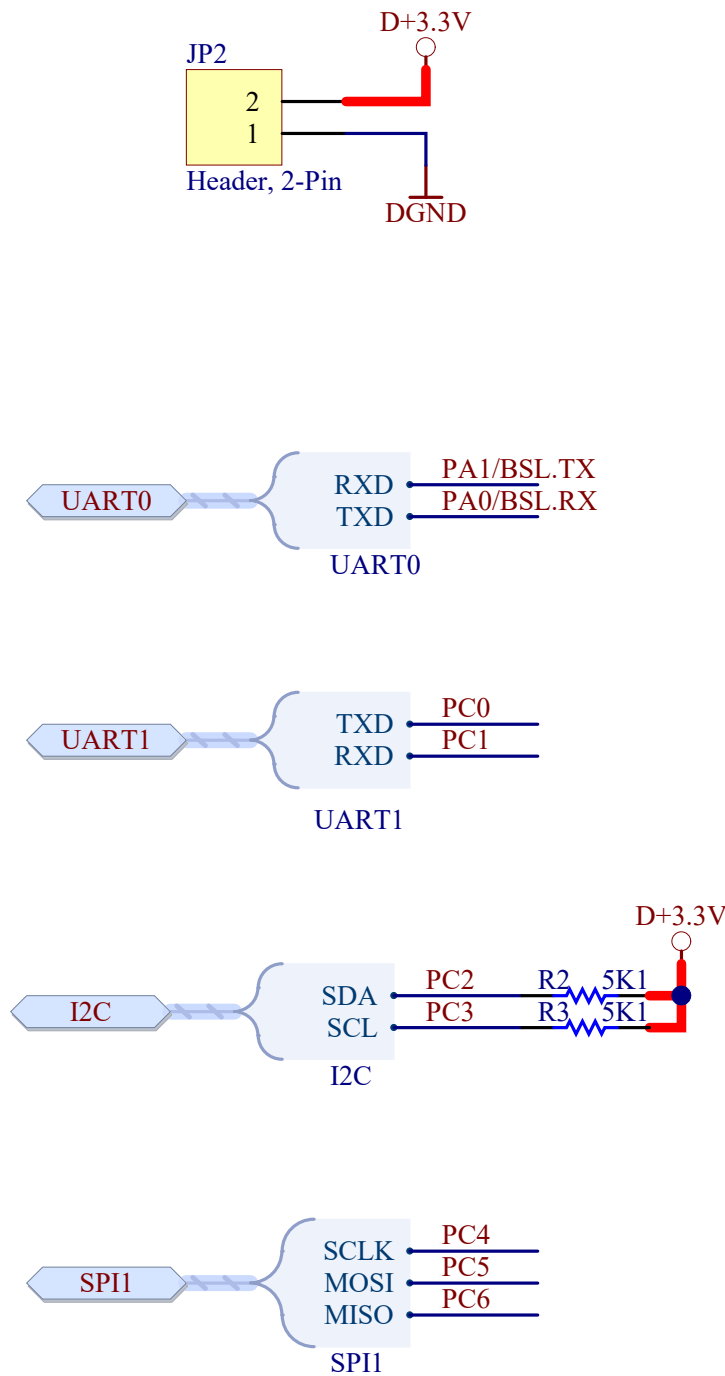

1. Fiducials

2. JTAG programer to CC2538

1. Pins used for CC1200 as default but also traced for external connections.

2. BSL configuration as default UART0


- RXD: GPA0
- TXD: GPA1

1. Place close to Zoul D+3.3V input

2. Place close to Zoul RF+3.3V

3. Place close to Zoul VDD inputs

4. Place close to Zoul RF output

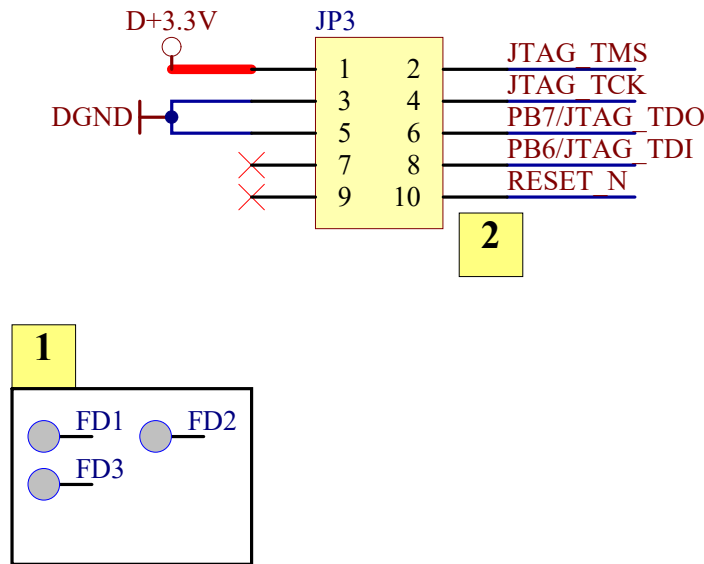

Project Name	Zoul reference	Sheet	1
Title	Core	Version	Rev.A
Author	J Sanchez	Date	24/03/2016
Comments			

