
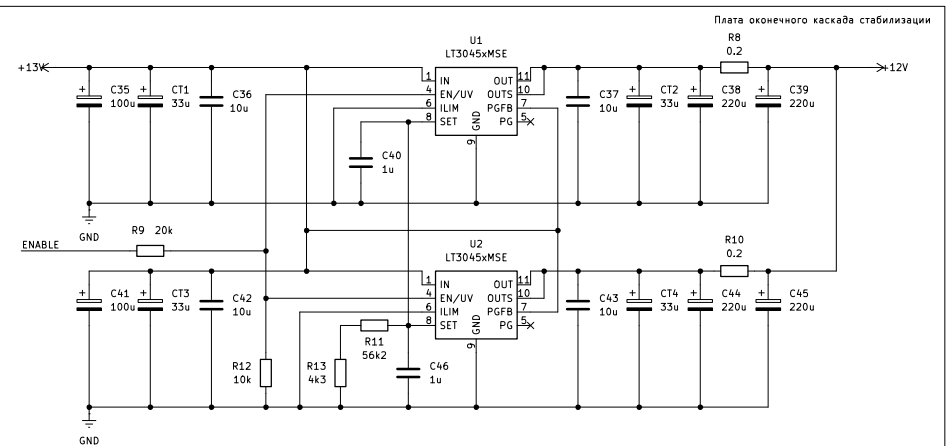
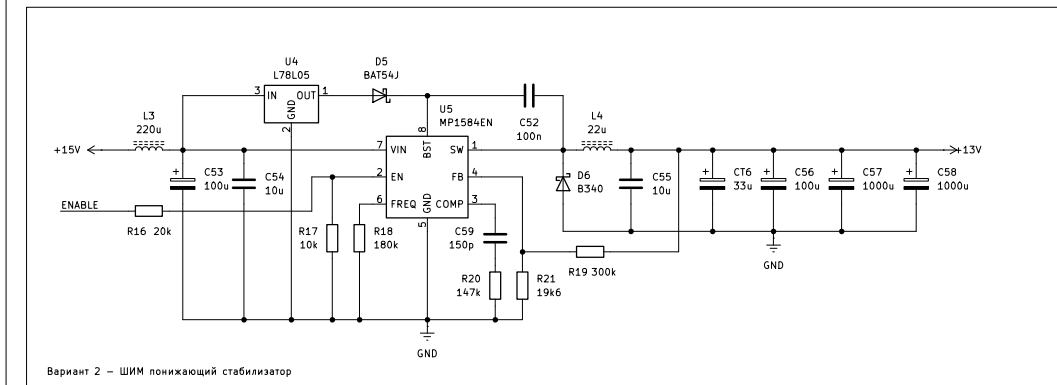
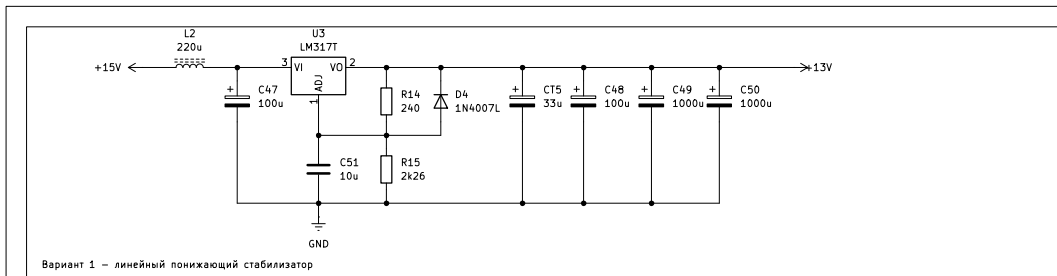


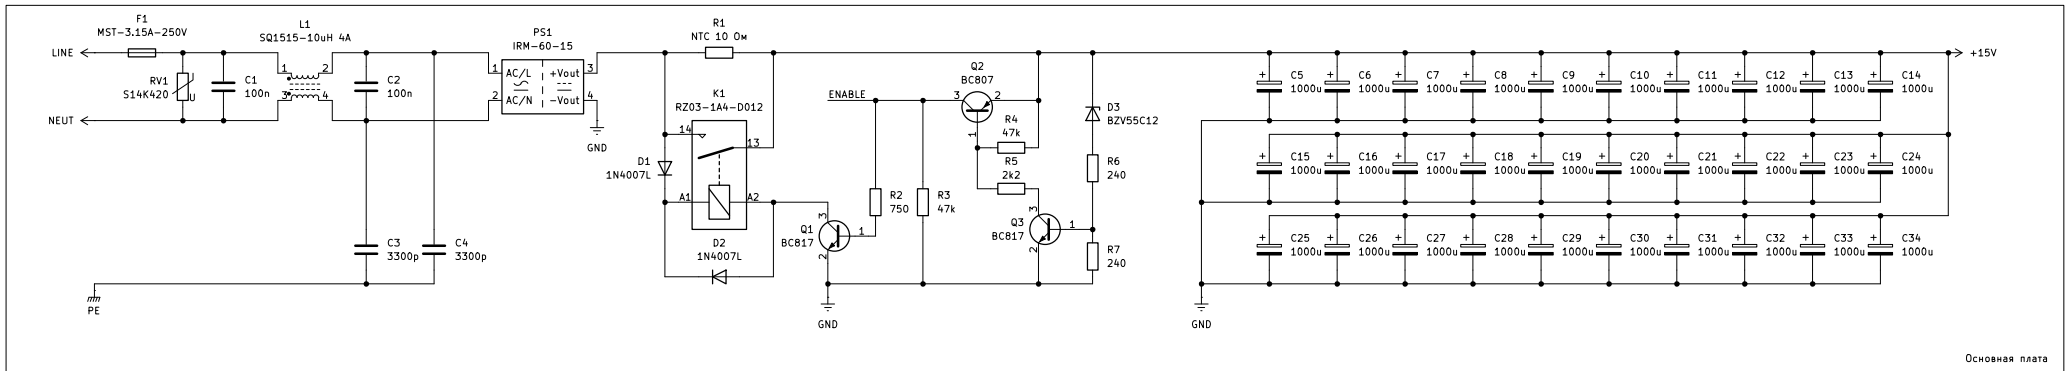

R8 и R10 выполнить медными проводниками на плате в виде дорожек определенной длины и ширины:

Выходное напряжение	R11	R13	R15	U4	D5	R19	R21	R20
12V	56k2	4k3	2k26	L78L05	BAT54J	300k	19k6	147k
5V	20k	4k99	909	—	—	267k	40k2	100k
3.3V	16k5	100	576	—	—	178k	40k2	75k

WEIGHT(OZ)	10mil WIDTH	20mil WIDTH
1	0.37 in (9.4 mm)	0.74 in (18.7 mm)
2	0.74 in (18.7 mm)	1.47 in (37.4 mm)

Sheet: /
File: Low noise power supply.kicad_sch

Title:

Size: A3

Date:

Rev:

KiCad E.D.A. 9.0.8

Id: 1/1