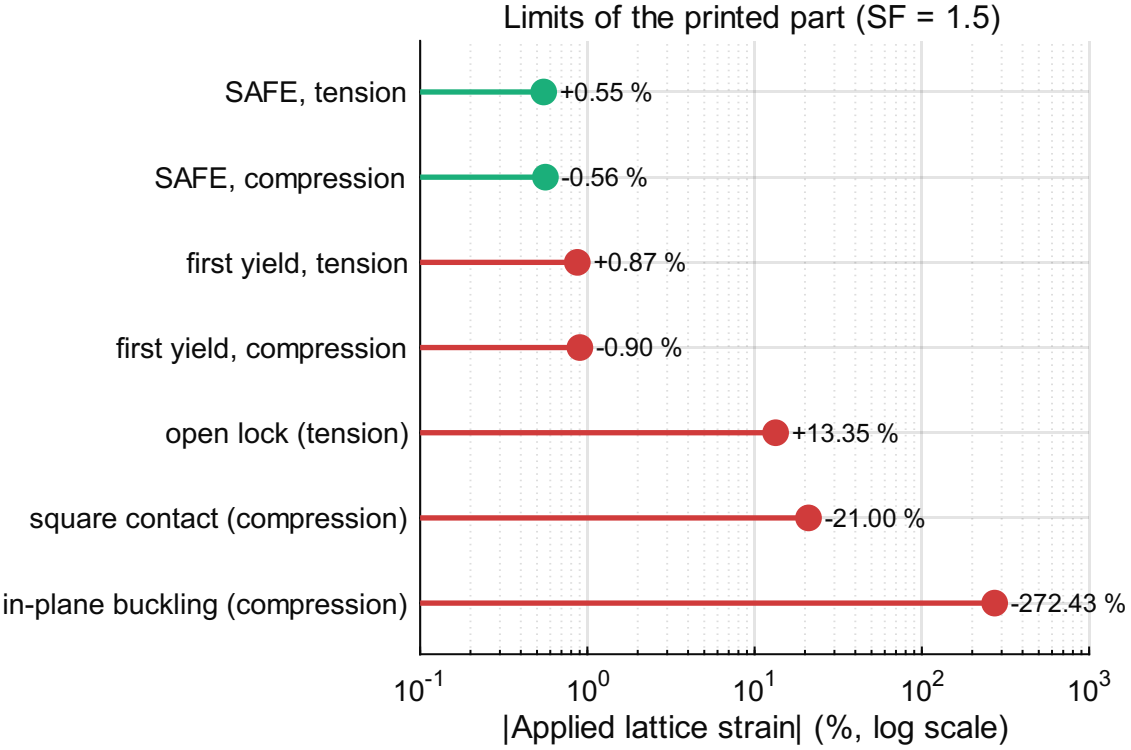
Limits of the printed part (SF = 1.5)
SAFE, tension
+0.55 %
SAFE, compression
-0.56 %
first yield, tension
+0.87 %
first yield, compression
-0.90 %
open lock (tension)
+13.35 %
square contact (compression)
-21.00 %
in-plane buckling (compression)
-272.43 %
10^-1
10^0
10^1
10^2
10^3
|Applied lattice strain| (%, log scale)