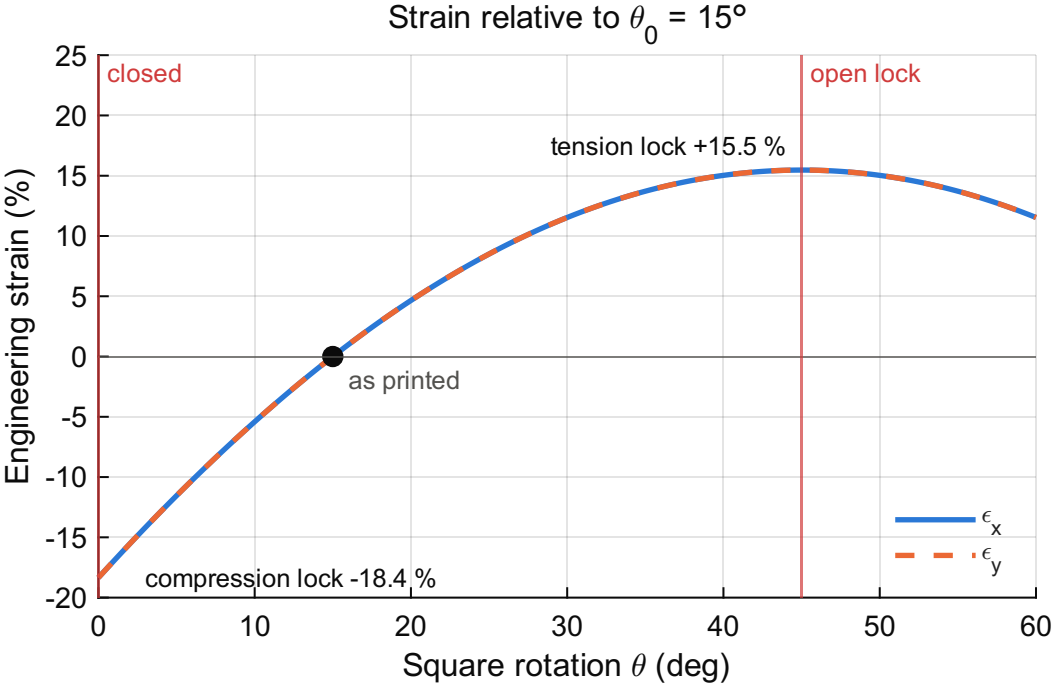
Strain relative to θ_0 = 15°
closed
open lock
tension lock +15.5 %
as printed
compression lock -18.4 %
ϵ_x
ϵ_y
Engineering strain (%)
Square rotation θ (deg)
25
20
15
10
5
0
-5
-10
-15
-20
0
10
20
30
40
50
60