





Michael Domar
04/24/19

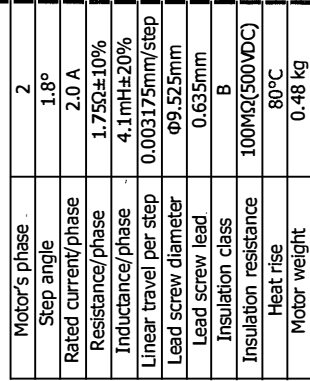

Notes,
1. To maximize output force and life of linear actuators, radial load on lead screws should be avoided or be kept at a minimum.

CUSTOMER		NOTICE TO PERSONS RECEIVING THIS DRAWING THIS DRAWING IS ONLY CONDITIONALLY ISSUED, AND FOR THE SOLE PURPOSE OF INFORMING LICENSEES AND ASSOCIATE CONTRACTORS OF DINGS' MOTION, AND VENDORS THEREOF AND CUSTOMERS THEREOF. RECEIPT OR POSSESSION THEREOF DOES NOT CONFER ANY RIGHT IN THE SUBJECT MATTER OF THE DRAWING. THE DESIGN, CONSTRUCTION, TECHNICAL INFORMATION AND ALL OTHER SUBJECT MATTER SHOWN IN THIS DRAWING ARE AND REMAIN, EXCEPT AS MAY BE OTHERWISE INDICATED BY WRITTEN NOTICE HEREON, THE EXCLUSIVE PROPERTY OF SAID CORPORATION. THIS DRAWING MAY BE REPRODUCED ONLY BY LICENSEES AND ASSOCIATE CONTRACTORS OF SAID CORPORATION AND ONLY FOR LICENCED MANUFACTURE, AND BY VENDORS MANUFACTURING FOR SAID CORPORATION AND ONLY FOR LICENSEES AND ASSOCIATE CONTRACTORS.												
WIRING CHART		EXCITING SEQUENCE					DRAWN		HC	DATE	2019/4/24	DINGS' MOTION USA™		
A+		CW	+		→	UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE AS BELOW PER ISO2768-CK.					...Precision Motion Specialists			
A		Red A +	+		-	LINEAR	ANGULAR	APPRVD		DATE				
		Red/wht A-	-		+	0~3	±0.2					SIZE	A3	SHEET 1 OF 1
		Green B +		+	-	3~6	±0.5					23N2120A4-152.4SM5N-001	SCALE 1: 1	REV 00
		Gm/wht B-		-	+	6~30	±0.8							
		CCW	←			30~120	±1.5	120~400	±15'					
								MODEL						
	