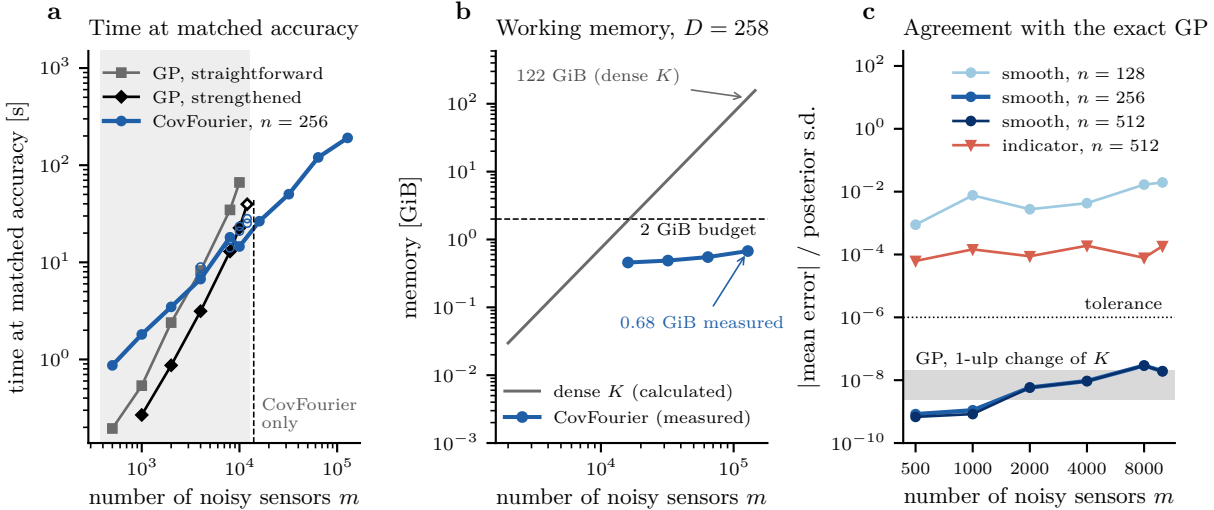

a
Time at matched accuracy
GP, straightforward
GP, strengthened
CovFourier, $n = 256$
time at matched accuracy [s]
CovFourier only
number of noisy sensors m
b
Working memory, $D = 258$
122 GiB (dense K)
2 GiB budget
0.68 GiB measured
memory [GiB]
dense K (calculated)
CovFourier (measured)
number of noisy sensors m
c
Agreement with the exact GP
smooth, $n = 128$
smooth, $n = 256$
smooth, $n = 512$
indicator, $n = 512$
tolerance
GP, 1-ulp change of K
|mean error| / posterior s.d.
number of noisy sensors m