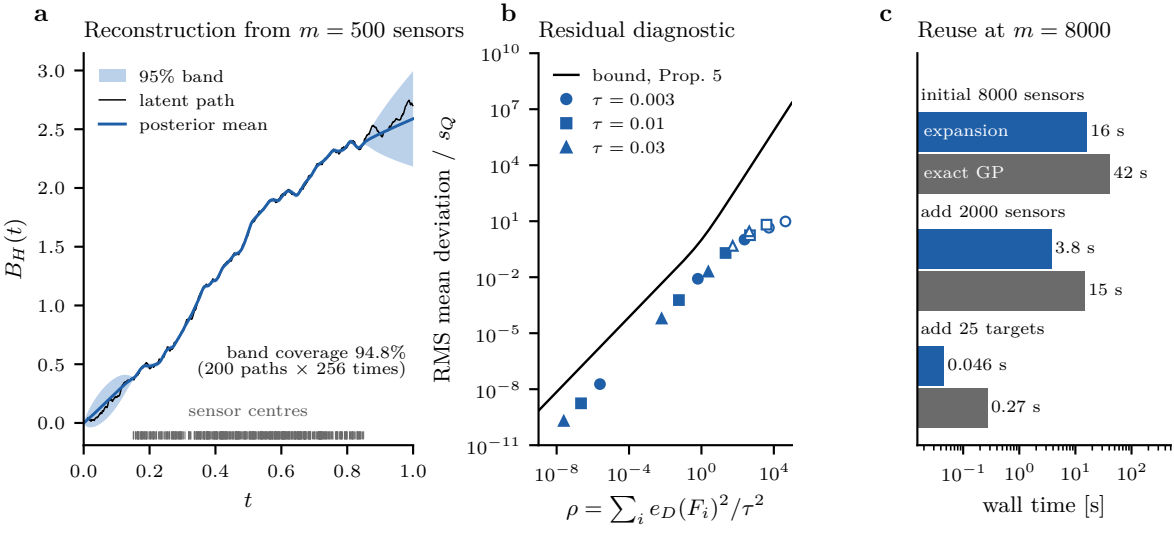

a
Reconstruction from $m = 500$ sensors
95% band
latent path
posterior mean
band coverage 94.8%
(200 paths × 256 times)
sensor centres
$B_H(t)$
t
b
Residual diagnostic
bound, Prop. 5
$\tau = 0.003$
$\tau = 0.01$
$\tau = 0.03$
RMS mean deviation / s_Q
$\rho = \sum_i e_D(F_i)^2/\tau^2$
c
Reuse at $m = 8000$
initial 8000 sensors
expansion
16 s
exact GP
42 s
add 2000 sensors
3.8 s
15 s
add 25 targets
0.046 s
0.27 s
wall time [s]