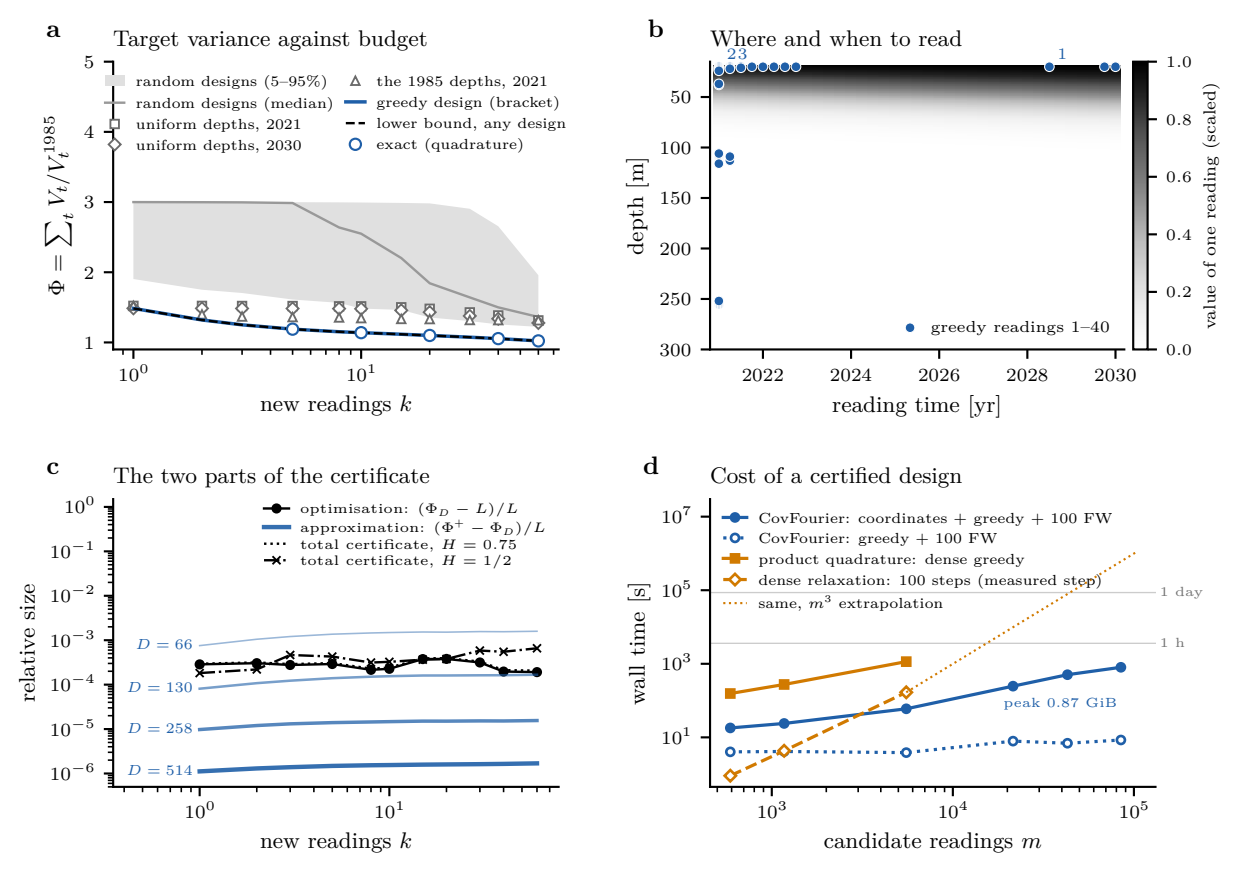

a
Target variance against budget
random designs (5–95%)
random designs (median)
uniform depths, 2021
uniform depths, 2030
the 1985 depths, 2021
greedy design (bracket)
lower bound, any design
exact (quadrature)
$\Phi = \sum_t V_t/V_t^{1985}$
new readings k
b
Where and when to read
greedy readings 1–40
depth [m]
reading time [yr]
value of one reading (scaled)
c
The two parts of the certificate
optimisation: $(\Phi_D - L)/L$
approximation: $(\Phi^+ - \Phi_D)/L$
total certificate, $H = 0.75$
total certificate, $H = 1/2$
$D = 66$
$D = 130$
$D = 258$
$D = 514$
relative size
new readings k
d
Cost of a certified design
CovFourier: coordinates + greedy + 100 FW
CovFourier: greedy + 100 FW
product quadrature: dense greedy
dense relaxation: 100 steps (measured step)
same, m^3 extrapolation
1 day
1 h
peak 0.87 GiB
wall time [s]
candidate readings m