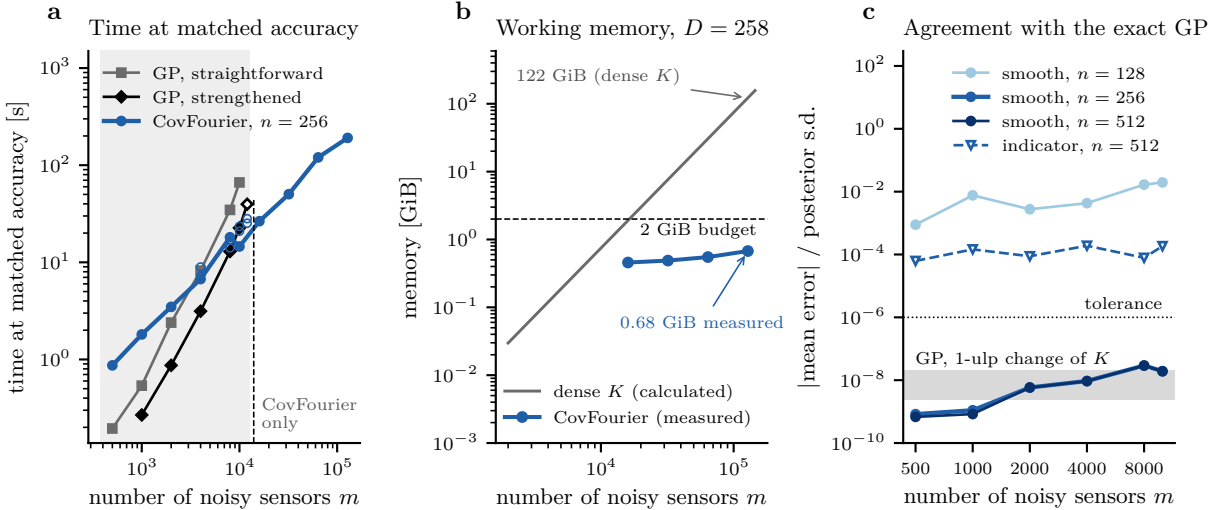

a
Time at matched accuracy
GP, straightforward
GP, strengthened
CovFourier, $n = 256$
time at matched accuracy [s]
10^3
10^2
10^1
10^0
CovFourier only
10^3
10^4
10^5
number of noisy sensors m
b
Working memory, $D = 258$
122 GiB (dense K)
2 GiB budget
0.68 GiB measured
memory [GiB]
10^2
10^1
10^0
10^{-1}
10^{-2}
10^{-3}
dense K (calculated)
CovFourier (measured)
10^4
10^5
number of noisy sensors m
c
Agreement with the exact GP
smooth, $n = 128$
smooth, $n = 256$
smooth, $n = 512$
indicator, $n = 512$
|mean error| / posterior s.d.
10^2
10^0
10^{-2}
10^{-4}
10^{-6}
10^{-8}
10^{-10}
tolerance
GP, 1-ulp change of K
500
1000
2000
4000
8000
number of noisy sensors m