
ILI9488 3.5 TFT DISPLAY TO ESP32 DOIT WROOM

@Peterforth-2022



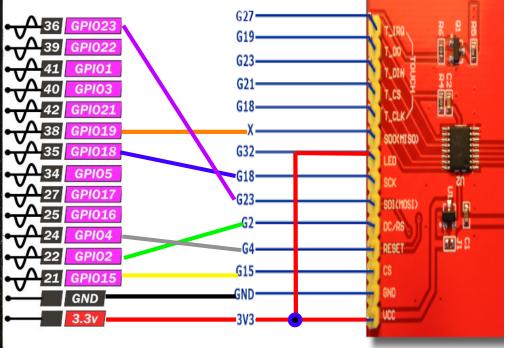

BL led needs to go to +3.3V bl means backlite...

C	

GND GND CS GPIO15 RESET GPIO4 DC/RS GPI02 SDI (MOSI) GPIO23 SCK GPIO18 LED GPIO32 SDO (MISO) N.C. T_CLK GPIO18 T_CS GPIO21 T_DIN GPIO23 T_DO GPIO19 T_IRQ GPIO27

ESP32 Pin

3V3

TFT Pin

VCC

because of the 20MHZ

freq.of the SPI lines
I used hq female connectors
to the pins,breadboard will not
work.