



Università degli Studi di Salerno  
Dipartimento di Informatica

---

Tesi di Laurea di I livello in  
Informatica

# Test Driven Development for Embedded Systems

**Relatore**

Giuseppe Scanniello

**Correlatore**

Dott. Nome Cognome

**Candidato**

Michelangelo Esposito

---

Academic Year 2021-2022

# Abstract

...

The purpose of this thesis is to analyze the benefits and/or drawbacks derived from the application of Test Driven Development (TDD) as part of the software development lifecycle of Embedded Systems.

# Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
<b>2</b>	<b>Test Driven Development</b>	<b>2</b>
2.1	Introduction . . . . .	2
2.2	Test Driven Development . . . . .	2
<b>3</b>	<b>Testing Embedded Systems</b>	<b>6</b>
3.1	Testing Embedded Systems . . . . .	6
3.2	Test Driven Development for Embedded Systems . . . . .	7
<b>4</b>	<b>Literature</b>	<b>8</b>
<b>5</b>	<b>Case Study</b>	<b>9</b>
5.1	Overview . . . . .	9
5.2	Research Questions . . . . .	9
5.3	Experimental tasks . . . . .	9
<b>6</b>	<b>Conclusions</b>	<b>10</b>

# List of Figures

2.1	The Test Driven Development cycle . . . . .	3
-----	---	---

# List of Acronyms and Abbreviations

## Chapter 1

# Introduction

## Chapter 2

# Test Driven Development

### 2.1 Introduction

Testing can be defined as the process of finding differences between the expected behavior specified by system's requirements and models, and the observed behavior of the implemented software.

Unfortunately, it is impossible to completely test a nontrivial system. First, testing is not decidable. Second, testing must be performed under time and budget constraints [1], therefore developers often compromise on testing activities by identifying only a critical subset of features to be tested.

### 2.2 Test Driven Development

The concept of Test Driven Development (TDD) was firstly introduced in 2003 by Kent Back in the book "Test Driven Development By Example" [2]. While there is no formal definition of the process, as the author states, the goal is to "write clean code that works". Compared to traditional SDL processes, TDD is an extremely short, incremental, and repetitive process, and is related to **test-first programming** concepts in extreme programming; this advocates for frequent updates/releases for the software, in short cycles, while encouraging code reviews, unit testing and incremental addition of features.

At its core, TDD is made up of three iterative phases: "Red", "Green" and "Blue" (or "Refactor"):

- In the "**Red**" phase, a test case is written for the chunk of functionality to be implemented; since the corresponding logic does not exist yet, the test will obviously fail, often not even compiling.

- In the "**Green**" phase, only the code that is strictly required to make the test pass is written.
- Finally, in the "**Blue**" phase, the implemented code, as well as the respective test cases, is refactored and improved. It is important to perform regression testing after the refactoring to ensure that the changes didn't result in any unexpected behaviors in other components.

Each new unit of code requires a repetition of this cycle [3].

The figure below provides a representation of the TDD cycle:

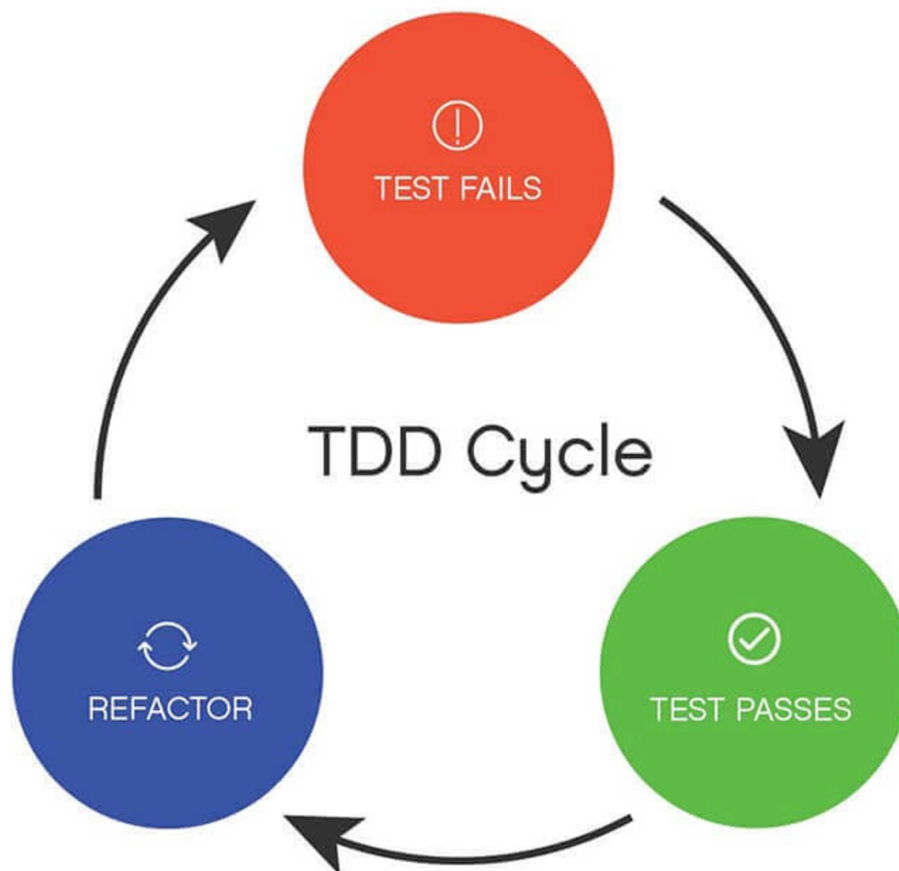


Figure 2.1: The Test Driven Development cycle

As previously stated, each TDD iteration should be extremely short, usually spanning from 10 to 15 minutes at most; this is possible thanks



to a meticulous decomposition of the system's requirements into a set of **User Stories**, each detailing a small chunk of a functionality specified in the requirements. These stories can then be prioritized and implemented iteratively.

User stories can vary in granularity: when using a fine-grained structure when describing the task, this can be broken up into a set of sub-tasks, each corresponding to a small feature; on the other hand, with coarser-grained tasks, this division is less pronounced [4]. Even when the same task is considered, the outcome of the TDD process will change depending on the level of granularity employed when describing it; there is no overall right or wrong approach, rather it is something that comes from the experience of the developer to break tasks into small work items [4].

The general mantra of TDD revolves around the "Make it green, then make it clean" motto

The employment of TDD can result in a series of benefits during the development process, such as:

- **Regression testing:** by incrementally building a test suite as the different iterations of TDD are performed, we ensure that the system
- **Very high code coverage:** coverage is a metric used to determine how much of the code is being tested; it can be expressed according to different criteria such as statement coverage, i.e., how many statements in the code are reached by the test cases, branch coverage, i.e., how many conditional branches are executed during testing, or function coverage, i.e., how many functions are executed when running the test suite. While different coverage criteria result in different benefits, by employing TDD we ensure that any segment of code written has at least one associated test case.
- **Improved code quality:** as we are specifically writing code to pass the tests in place, and refactoring it after the "Green" phase, we ensure that the code is cleaner and overall more optimized, without any extra pieces of functionalities that may not be needed.
- **Improved code readability and documentation:** tests act as documentation...
- **Simplified debugging and early fault detection:** Whenever a test fails it becomes obvious which component has caused the fault: by adopting this incremental approach and performing regression testing, if a test fails we will be certain that the newly written code will be

responsible. For this reason, faults are detected extremely early during the testing process, rather than potentially remaining hidden until the whole test suite has been built and executed.

## Chapter 3

# Testing Embedded Systems

### 3.1 Testing Embedded Systems

Embedded Systems (ES) can be defined as a combination of hardware components and software systems that seamlessly work together to achieve a specific purpose. Such systems can be dynamically programmed or have a fixed functionality set, and are often engineered to achieve a domain-specific, often critical, goal. In recent years, such system have seen a surge in popularity, and have driven innovation forward in their respective areas of deployment: everywhere, spanning from the agricultural field, to the medical and energy ones, ES of various size and complexity are employed.

Due to their high specialization, ES often deal with time and resource constraints, both in hardware and in software; often these systems are battery-powered and therefore the hardware they are equipped with, often purpose built, must be highly efficient in its operations. Furthermore, from the software point-of-view, it is essential that the system operates deterministically and with real-time constraints.

Failures in ES should always be evident and identifiable quickly (a heart monitor should not fail quietly [5]). Given the high criticality of such systems, ensuring their dependability over the course of their lifespan is essential; ES can be deployed in extreme conditions (i.e., weather monitoring in extreme locations of the planet, devices inside the human body, or ...), where maintenance operations cannot be performed regularly, and high availability is expected.

The dependability of a system can be expressed in terms of:

- **System maintainability:** the extent to which a system can be adapted/modified to accommodate new change requests.

- **System reliability:** the extent to which a system is reliable with respect to the expected behavior.
- **System availability:** the extent to which a system remains available for its users.
- **System security:** the extent to which a system can keep data of its users safe and ensures the safety of their users.

These dependability attributes cannot be considered individually, as there are strongly interconnected; for instance, safe system operations depend on the system being available and operating reliably in its lifespan. Furthermore, an ES can be unreliable due to its data being corrupted by an external attack or due to poor implementation. As a result of particular care should be applied in the design of these systems.

### 3.2 Test Driven Development for Embedded Systems

Testing ES poses a series of challenges compared to traditional testing: first of all, in the case of ES that are highly integrated with a physical environment (such as with CPSs), replicating the exact conditions in which the hardware will be deployed may be challenging. Secondly, field-testing of these systems can be unfeasible to dangerous or impractical environmental conditions (i.e., a nuclear power plant, a deep-ocean station, or the human body). Furthermore, given the absence of a user interface in most cases, testing such systems can be particularly challenging, given the lack of immediate feedback. Finally, the testing of time-critical systems has to validate the correct timing behavior which means that testing the functional behavior alone is not sufficient.

For these reasons, the general testing process of ES follows the X-in-the-loop paradigm [6] where the system goes through a series of step that simulate its behavior with an increased level of detail before being actually deployed; subcategories in this area include model-in-the-loop, software-in-the-loop, processor-in-the-loop, hardware-in-the-loop, and system-in-the-loop:

## Chapter 4

# Literature

## Chapter 5

# Case Study

### 5.1 Overview

In this section we will present in detail the approach we followed to establish the two experimental tasks on which this study is based on, as well as the analysis of the gathered results.

The study was conducted with the participation of 9 undergraduate master's degree students enrolled in the "Embedded Systems" course at the University of Salerno in Italy. The participation voluntarily accepted to take part in this study.

### 5.2 Research Questions

The study we performed aimed at answering the following Research Questions (RQ):

- RQ1:
- RQ2:
- RQ3:

### 5.3 Experimental tasks

The following table contains a summary of the user stories for the two experimental tasks on which the study was conducted:

## Chapter 6

# Conclusions

# Bibliography

- [1] Bernd B. and Allen H. D. *Object-Oriented Software Engineering Using UML, Patterns, and Java, Third Edition*. Pearson, 2010.
- [2] Beck K. *Test-Driven Development by Example*. Addison Wesley, 2002.
- [3] *Guidelines for Test-Driven Development*. URL: [https://learn.microsoft.com/en-us/previous-versions/aa730844\(v=vs.80\)?redirectedfrom=MSDN](https://learn.microsoft.com/en-us/previous-versions/aa730844(v=vs.80)?redirectedfrom=MSDN).
- [4] Itir Karac, Burak Turhan, and Natalia Juristo. “A Controlled Experiment with Novice Developers on the Impact of Task Description Granularity on Software Quality in Test-Driven Development”. In: *IEEE Trans. Software Eng.* 47.7 (2021), pp. 1315–1330. DOI: 10.1109/TSE.2019.2920377. URL: <https://doi.org/10.1109/TSE.2019.2920377>.
- [5] White E. *Making Embedded Systems: Design Patterns for Great Software*. O’Reilly, 2011.
- [6] Vahid Garousi et al. “What We Know about Testing Embedded Software”. In: *IEEE Softw.* 35.4 (2018), pp. 62–69. DOI: 10.1109/MS.2018.2801541. URL: <https://doi.org/10.1109/MS.2018.2801541>.
- [7] A. Author and A. Author. *Book reference example*. Publisher, 2099.
- [8] A. Author. “Article title”. In: *Journal name* (2099).
- [9] *Example*. URL: <https://www.isislab.it>.
- [10] A. Author. “Tesi di esempio ISISLab”. 2099.