



## dP-FMEA: An innovative *Failure Mode and Effects Analysis* for distributed manufacturing processes

Domenico A. Maisano, Fiorenzo Franceschini & Dario Antonelli

**To cite this article:** Domenico A. Maisano, Fiorenzo Franceschini & Dario Antonelli (2020): dP-FMEA: An innovative *Failure Mode and Effects Analysis* for distributed manufacturing processes, *Quality Engineering*, DOI: [10.1080/08982112.2020.1729991](https://doi.org/10.1080/08982112.2020.1729991)

**To link to this article:** <https://doi.org/10.1080/08982112.2020.1729991>



Published online: 06 Mar 2020.



Submit your article to this journal 



Article views: 10



View related articles 



View Crossmark data 

# dP-FMEA: An innovative *Failure Mode and Effects Analysis* for distributed manufacturing processes

Domenico A. Maisano, Fiorenzo Franceschini, and Dario Antonelli

DIGEP (Dept. of Management and Production Engineering), Politecnico di Torino, Torino, Italy

## ABSTRACT

The *Failure Mode and Effects Analysis* (FMEA) is a powerful tool to design and maintain reliable systems (products, services or manufacturing processes), investigating their potential failure modes from the threefold perspective of *severity*, *occurrence* and *detection*. The *Process FMEA*, or more briefly P-FMEA, is a declination of the FMEA for manufacturing processes (or parts of them). Being progressively characterized by decentralized networks of flexible manufacturing facilities, the current scenario significantly hampers the implementation of the traditional P-FMEA, which requires the joint work of a group of experts formulating collective judgments. This paper revises the traditional P-FMEA approach and integrates it with the  $ZM_{1r}$ -technique – i.e. a recent aggregation technique based on the combination of the Thurstone's *Law of Comparative Judgment* and the *Generalized Least Squares* method – allowing experts distributed through organizations to formulate their judgments individually. The revised approach – referred to as "*distributed-Process FMEA*" or more briefly dP-FMEA – allows to manage a number of experts, without requiring them to physically meet and formulate collective decisions, thus overcoming a relevant limitation of the traditional P-FMEA. The dP-FMEA approach also includes a relatively versatile response mode and overcomes several other limitations of the traditional approach, including but not limited to: (i) arbitrary formulation and aggregation of expert judgments, (ii) lack of consideration of the dispersion of these judgments, and (iii) lack of estimation of the uncertainty of results. The description is supported by a real-life application example concerning a plastic injection-molding process.

## KEYWORDS


P-FMEA; distributed manufacturing systems; failure modes; failure causes;  $ZM_{1r}$ -technique; risk priority number; incomplete ranking

## Introduction and literature review

The *Failure Mode and Effects Analysis* (FMEA) is a very popular technique to improve the reliability of products, services and manufacturing processes, by analyzing failure scenarios before they have occurred and preventing the occurrence of causes or mechanisms of failures (Stamatis 2003; Tague 2005; Liu et al. 2019a). When applied at the product/service design stage, FMEA helps to achieve reliability while reducing the amount of design corrections (Geramian, Abraham, and Ahmadi Nozari 2019a); when applied to manufacturing processes, FMEA is very useful to improve reliability and safety and provides a useful basis for planning the corresponding predictive maintenance (Johnson and Khan 2003).

The FMEA is generally carried out by a cross-functional and multidisciplinary team of experts – typically composed of engineers and technicians specialized in design, testing, reliability, quality,

maintenance, manufacturing, safety, etc. – which is coordinated by a team leader in various activities (see the flowchart in Figure 1). Many of these activities must be carried out collectively by the experts, trying to overcome conflicting situations and converging toward a unanimous agreement. The major collective activities are those concerned with the prioritization of the so-called *failure modes*, based on the *Risk Priority Number* (RPN), which is a composite indicator given by the product of three so-called *risk factors*: *occurrence* (O), *severity* (S), and *detection* (D) (Yeh and Chen 2014). Each of these risk factors is determined by collective judgment, using a conventional ordinal scale from 1 to 10 (Stamatis 2003); see activities 7, 8 and 10 of the flowchart in Figure 1. The failure modes with higher RPNs are considered more critical and deserve priority for the implementation of risk mitigation actions: since the resources available for corrective

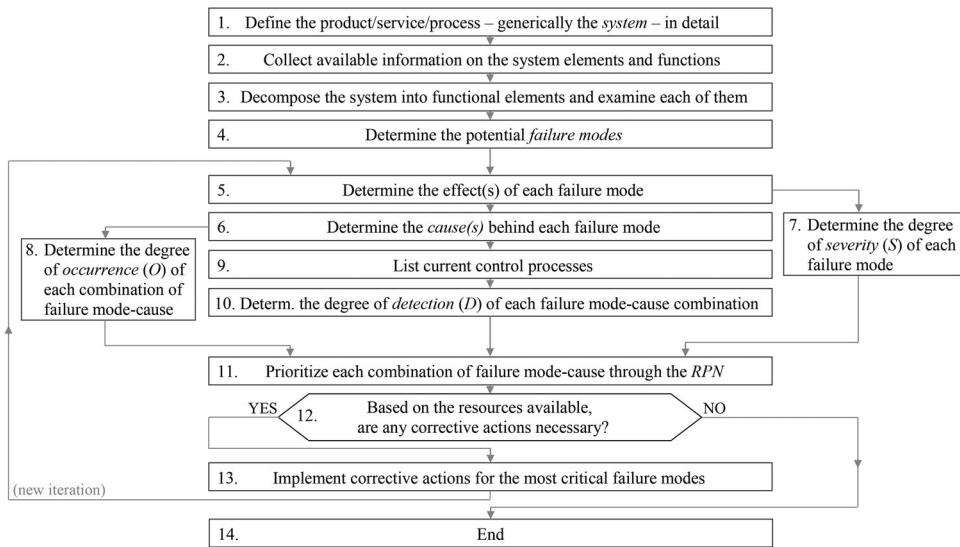

**Figure 1.** Flowchart showing the main stages of a FMEA (Stamatis 2003).

actions are limited, it is reasonable to concentrate them where they are most needed, tolerating the minor failure modes. This sort of criterion of economy/sustainability is represented by activities 12 and 13 in the flowchart in Figure 1; the feedback loop related to activity 13 highlights the iterative nature of the entire FMEA procedure.

The traditional method for prioritizing failure modes shows important shortcomings, extensively debated in the scientific literature (Franceschini and Galetto 2001; Das Adhikary et al. 2014; Zhou et al. 2016; Certa et al. 2017; Huang et al. 2019; Liu 2019; Liu et al. 2019b; Geramian et al. 2019b); including but not limited to:

- Use of arbitrary reference tables for assigning 1-to-10 scores to the three risk factors  $S$ ,  $O$  and  $D$  (AIAG 2019; Franceschini, Galetto, and Maisano 2019). As an example, Table 1 contains evaluation criteria suggested by the Automotive Industry Action Group (AIAG 2019), in an endeavor to unify FMEA for automotive manufacturing processes.
- $S$ ,  $O$  and  $D$  are arbitrarily considered as equally important (Franceschini and Galetto 2001).
- Since  $S$ ,  $O$  and  $D$  are evaluated using ordinal scales, their product is not a meaningful measure according to the Measurement Theory (Roberts 1979; Franceschini et al. 2019).
- The degree of (dis)agreement between the team members in formulating collective judgments is not taken into account.

From this point on, the attention will be focused on the *Process FMEA* (or more briefly P-FMEA), i.e. a

decentralization of the FMEA approach for manufacturing processes, which can be carried out both (1) at the *design* stage, to consider potential failures prior to launching production, and (2) at the *operational* stage, to gradually improve the process reliability, in line with the concept of *continuous improvement* (Indrawati and Ridwansyah 2015).

It is particularly interesting and challenging to assess the role of P-FMEA in the current globalized scenario, which is increasingly characterized by *distributed manufacturing processes*, i.e. a form of decentralized manufacturing based on a network of geographically dispersed facilities that are supposed to be flexible, reconfigurable and coordinated through information technology (Matt, Rauch, and Dallasega 2015; Srai et al. 2016). The use of local resources for customized products and the adoption of new production technologies in a digitalized environment (e.g., additive manufacturing, collaborative robots, etc.) make distributed manufacturing increasingly attractive for potential sustainability gains.

Unfortunately, decentralized production in some ways hampers the application of the traditional P-FMEA, which requires the joint work of several parties in formulating a number of collective judgments. Although it was proven that the effectiveness of the P-FMEA tends to improve for large groups of experts (Guerrero and Bradley 2013), for decentralized processes the number of experts in each facility is generally small (e.g., five or less) (Liu et al., 2018, 2019a). The distinct application of P-FMEA to various decentralized processes is therefore ineffective in practice, being fragmented as well as unnecessarily repetitive.

**Table 1.** Severity/occurrence/detection evaluation criteria for P-FMEA suggested by the Automotive Industry Action Group (AIAG 2019).

Rating	(S) Severity	(O) Occur.	(D) Detection
10	May endanger (machine or assembly) operator, without warning.	Very high ( $P \approx 10\%$ )	No current process control; failure mode and/or cause cannot be detected or prevented.
9	May endanger (machine or assembly) operator, with warning.	High ( $P \approx 5\%$ )	Failure mode and/or cause is not easily detected (e.g., random audits).
8	100% of product may have to be scrapped; the production line may be shut down.	High ( $P \approx 2\%$ )	Failure-mode detection post-processing by operator through visual/tactile/audible means.
7	Product may have to be sorted and a portion (lower than 100%) scrapped; the production line is operational albeit at a reduced level of performance.	High ( $P \approx 1\%$ )	Failure-mode detection in-station by operator, through visual/tactile/audible means, or post-processing, through use of <i>attribute</i> gauging (go/no-go, manual torque check/clicker wrench, etc.).
6	100% of the product may have to be reworked off-line and then accepted/rejected.	Moderate ( $P \approx 0.2\%$ )	Failure-mode detection post-processing by operator, through use of <i>variable</i> gauging, or in-station by operator, through use of <i>attribute</i> gauging (go/no-go, manual torque check/clicker wrench, etc.).
5	A portion (lower than 100%) of the product may have to be reworked off-line and then accepted/rejected.	Moderate ( $P \approx 0.05\%$ )	Failure-mode/cause detection in-station by operator, through <i>variable</i> gauging, or by automated controls that will detect discrepant part and notify operator (light, buzzer, etc.). Gauging performed on setup and first-piece check (for set-up causes only).
4	100% of product may have to be reworked in-station before being processed.	Moderate ( $P \approx 0.01\%$ )	Failure-mode detection post-processing by automated controls that will detect discrepant part and lock part to prevent further processing.
3	A portion (lower than 100%) of product may have to be reworked in-station before being processed.	Low ( $P \approx 0.001\%$ )	Failure-mode detection in-station by automated controls that will detect discrepant part and automatically lock part in station to prevent further processing.
2	Slight inconvenience to process, operation, or operator.	Low ( $P \leq 0.0001\%$ )	Failure-cause detection in-station by automated controls that will detect error and prevent discrepant part from being made.
1	No discernible effect.	Very low ( $P \approx 0$ )	Failure-cause prevention as a result of fixture design, machine design or part design. Discrepant parts cannot be made because item has been error-proofed by process/product design.

In other practical situations, the P-FMEA is carried out only by the experts of the dominant production facility – e.g. the largest or the most central one – and then imposed on the satellite facilities – e.g. those of smaller size and/or more dispersed geographically. This other practice does not fully exploit the technical knowledge of the experts affiliated to the satellite facilities, which instead could deserve to be shared. The application of one-and-only-one P-FMEA involving the totality of the experts – although they are dispersed in a network of decentralized manufacturing facilities – would be much more effective.

Despite the great relevance of this problem, few existing studies focus on large-group decision making in the FMEA context (Geramian et al. 2019a; Liu et al. 2019b). The purpose of this paper is to revise the traditional P-FMEA approach, making it effective also for distributed manufacturing environments. The revised approach – which will be referred to as

“distributed P-FMEA” or, more briefly, “dP-FMEA” – replaces the collective judgments with the aggregation of individual judgments by experts, from the perspective of each of the three risk factors *S*, *O* and *D*.

The dP-FMEA approach is divided into two phases:

1. For each risk factor, expert judgments are fused through a recent aggregation technique – called *ZM<sub>II</sub>* – which combines the Thurstone’s *Law of Comparative Judgment* (LCJ) and the *Generalized Least Squares* (GLS) method (Thurstone 1927; Kariya and Kurata 2004). The *ZM<sub>II</sub>*-technique can be applied in a variety of other decision-making contexts where experts make individual judgments on certain objects of interest (Franceschini and Maisano 2019).
2. Further aggregation of the analysis results concerning *S*, *O* and *D* into a single composite

indicator of criticality, with relative uncertainty estimation.

The new approach also includes a relatively versatile response mode based on the formulation of (incomplete) rankings and overcomes other limitations of the traditional P-FMEA, such as: (i) lack of consideration of the variability of expert judgments, (ii) arbitrary rating and questionable aggregation of expert judgments, (iii) lack of estimation of the uncertainty of results.

The remainder of the paper is organized into four sections. The section “ $ZM_{II}$ -technique” briefly recalls and exemplifies the  $ZM_{II}$ -technique, which will be applied in the first phase of the dP-FMEA. The section “Proposed methodology” illustrates the dP-FMEA methodology; the description is supported by a real-life case study concerning the processes of plastic injection-molding, which are performed in several distributed manufacturing facilities of a worldwide company of thermal systems. The section “Conclusions” summarizes the original contributions of this paper, its practical implications, limitations and suggestions for future research. Further details on the  $ZM_{II}$ -technique and the dP-FMEA methodology are contained in the [Appendix](#) section.

### **$ZM_{II}$ -technique**

In general, the  $ZM_{II}$ -technique can be used for any group-decision problem in which a number of *experts* express their individual judgments on certain *objects*, based on the degree of a specific *attribute* (Franceschini and Maisano 2019). This technique can be seen as a black box transforming some specific input data – i.e. expert judgments on the objects – into some specific output data – i.e. *ratio* scaling of the objects, with a relevant uncertainty estimation (Franceschini et al. 2019). Precisely, for each (*i*-th) object, the  $ZM_{II}$ -technique produces an estimate of (1) the (mean) ratio-scale value  $y_i$  and (2) the corresponding standard deviation  $\sigma_{y_i}$  (Franceschini and Maisano 2019). The  $ZM_{II}$ -technique includes three fundamental phases, as summarized in the following three subsections. For details, see also the section “Detailed description of the  $ZM_{II}$ -technique” (in the [Appendix](#)).

### **Data collection**

A prerequisite of the  $ZM_{II}$ -technique is that each of the experts involved in the problem formulates a ranking of the objects – i.e. an ordered sequence

including the objects with the highest grade of the attribute in the top positions and those with the lowest grade of the attribute in the bottom ones.

Apart from the *regular* objects (e.g.,  $f_1$  to  $f_{11}$  in the case study), experts may also include two (fictitious) *dummy* objects in their rankings: i.e. one ( $f_Z$ ) corresponding to the *absence* of the attribute of interest, and one ( $f_M$ ) corresponding to the *maximum-imaginable* degree of the attribute (Franceschini and Maisano 2019). When dealing with these dummy objects, two important requirements should be considered:

- $f_Z$  should be positioned at the bottom of a ranking, i.e. there should not be any other object with degree of the attribute lower than  $f_Z$ . In the case the attribute of another object is judged to be absent, that object will be considered indifferent to  $f_Z$  and positioned at the same hierarchical level.
- $f_M$  should be positioned at the top of a ranking, i.e. there should not be any other object with degree of the attribute higher than  $f_M$ . In the case the attribute of another object is judged to be the maximum imaginable, that object will be considered indifferent to  $f_M$  and positioned at the same hierarchical level.

In the best cases, experts formulate *complete* rankings, characterized by relationships of *strict dominance* (e.g., “ $f_i > f_j$ ”) or *indifference* (e.g., “ $f_i \sim f_j$ ”) among the possible pairs of objects. Unfortunately, the formulation of these rankings may be problematic for some experts, especially when the number of objects is large (Harzing et al. 2009). To overcome this obstacle, a flexible response mode that tolerates *incomplete* rankings is adopted. Below is a list of possible types of incomplete rankings.

- Rankings including only the objects with the higher degree of the attribute (or “*t*-objects”, where “*t*” stands for “top”) and those with the lower degree of the attribute (or “*b*-objects”, where “*b*” stands for “bottom”); these rankings will be hereafter denominated “Type-*t&b*”. The *t* parameter, which will be used below, is conventionally defined as the number of regular objects (i.e., excluding the two dummy objects) within the *t*-objects, while the *b* parameter is conventionally defined as the number of regular objects within *b*-objects. In the example in [Figure 2\(a\)](#),  $t = b = 2$ .
- Rankings including only the objects with the higher degree of the attribute (i.e., *t*-objects) among those available; see the example in [Figure](#)

Incomplete rankings	(a) Type- <i>t</i> & <i>b</i> ranking ( <i>t</i> =2) with $f_Z/f_M$ and with ordered <i>t</i> -objects	(b) Type- <i>t</i> ranking ( <i>t</i> =2) without $f_Z/f_M$ and with unordered <i>t</i> -objects	(c) Quasi-complete ranking (without $f_Z/f_M$ )	(d) Ranking excluding some regular objects
graphic form:				
analytic form:	$(f_M \sim f_1) > f_2 > \dots > (f_3 \sim f_4 \sim f_Z)$	$\{f_1 \parallel f_2\} > \dots$	$f_3 > (f_1 \sim f_6) > (f_2 \sim f_5) > (f_4 \sim f_7)$	$f_M > f_1 > f_2 > (f_3 \sim f_5 \sim f_7)$
missing objects:	$f_5, f_6$ and $f_7$	$f_M, f_3, f_4, f_5, f_6, f_7$ and $f_Z$	$f_2$ and $f_M$	$f_4, f_5$ and $f_6$
Reconstructed (partial) rankings				
graphic form:	$(f_M \sim f_1) > f_2 > \{f_3, f_4, f_Z\} > (f_5 \sim f_6 \sim f_7)$	$\{f_M \parallel f_1 \parallel f_2\} > \{f_3 \parallel f_4 \parallel f_5 \parallel f_6 \parallel f_7\}$	$\{f_M \parallel f_3\} > (f_1 \sim f_6) > (f_2 \sim f_5) > \{f_4 \parallel f_7\}$	$\{f_M \parallel f_1\} > f_2 > (f_3 \sim f_5 \sim f_7) \parallel \{f_4 \parallel f_5 \parallel f_6\}$
analytic form:				

**Figure 2.** Example of different types of incomplete rankings. Incomplete rankings can be turned into “reconstructed” (partial) rankings, including all the objects; reconstructed parts are marked in red.

2(b), in which  $t=2$ . From now on, these rankings will be denominated “Type-*t*”.

- Type-*t*&*b* or Type-*t* rankings where *t* and *b*-objects are not ordered. These rankings reflect an even higher level of incompleteness, where experts simply indicate the *t* or *b*-objects of the ranking, without necessarily ordering them.
- Rankings not including the two dummy objects ( $f_Z$  and  $f_M$ ), e.g. in the case experts find it difficult to envisage them. The rankings that do not include dummy objects but do include all regular ones will hereafter be referred to as “quasi-complete”; see the example in Figure 2(c).
- To contemplate the fact that experts may be unable to evaluate certain (regular) objects – e.g. those less familiar to them – they could formulate (incomplete) rankings that intentionally exclude some objects (see the example in Figure 2(d)). Of course, there cannot be relationships of strict dominance or indifference between the excluded objects and those included in the expert rankings, but only relationships of incomparability.
- Combining the previous three types of incomplete rankings, one can obtain Type-*t*&*b* or Type-*t* rankings that include or not the dummy objects and/or with ordered or unordered *t/b*-objects.

Figure 2 also shows that a generic incomplete ranking can be transformed into a “reconstructed” ranking,

including all the (dummy and regular) objects, with the addition of appropriate incomparability relationships. Borrowing the language of the Order Theory, the above reconstructed rankings may be referred to as *partial*: in addition to the relationships of strict dominance or indifference, these rankings also include some relationships of *incomparability* (e.g., “ $f_i \parallel f_j$ ”) among the possible pairs of objects.

The use of these rankings may also favor reliability of responses, since – in case of indecision – experts are not necessarily forced to provide complete and (illusorily) precise responses (Lagerspetz 2016; Franceschini and Maisano 2019). In general, the choice to provide more or less complete rankings may depend on several risk factors that affect experts, such as availability of time, level of education, willingness to collaborate, degree of experience, technical knowledge, etc. To further improve the reliability of the data collected, it is possible to use common online procedures to support the generation of rankings, such as those briefly described below (Fabbris 2013).

- *Numerical assignment.* In this technique, the respondent (expert) associates each object with a relevance order number, using a numerical drop-down box. The order of relevance of the objects and a respective ranking are then reconstructed.
- *Fixed total partitioning.* A respondent is assigned a fixed budget – say 100 points – and is asked to

partition it over the objects, according to some attribute. This support technique is generally applied through a computer-assisted interviewing system that makes it possible to check the sum of points spent after each assignment (Conrad et al. 2005). Next, the ordinal hierarchies between the objects can be transformed into a ranking.

- *Drag and drop interface.* In this type of online supporting approach, respondents can drag and drop the objects to re-order them as they choose. This approach is interactive and helps the respondents to construct a ranking in a practical and intuitive way.
- *Picking the best/worst object.* Each respondent may be asked to pick the most relevant object and, in case, the least relevant one. Respondents are sometimes asked to pick  $k$  objects as the most/least relevant ones and – in some instances – to construct an order of this subset of objects. Once the most/less relevant objects have been isolated, the procedure could be iterated to the remaining objects.

In our case study, the latest support technique was mainly used, allowing experts to formulate complete/incomplete rankings, depending on their level of confidence and without forcing them to make uncertain judgments.

### Data processing and solution

The mathematical formalization of the problem relies on the postulates and simplifying assumptions of the *Law of Comparative Judgment* (LCJ) by Thurstone (1927), who postulated the existence of a *psychological/psychophysical continuum*, in which objects are positioned depending on the degree of a certain attribute. The position of a generic  $i$ -th object ( $f_i$ ) is postulated to be distributed normally, in order to reflect the intrinsic expert-to-expert variability:  $f_i \sim N(x_i, \sigma_{x_i}^2)$ , where  $x_i$  and  $\sigma_{x_i}^2$  are the unknown mean value and variance related to the degree of the attribute of that object. Considering two generic objects,  $f_i$  and  $f_j$ , and having introduced further simplifying hypotheses (see the section “Mathematical formulation of the problem”, in the Appendix), it can be asserted that (Thurstone 1927):

$$p_{ij} = P[(f_i - f_j) > 0] = 1 - \Phi[-(x_i - x_j)], \quad (1)$$

which expresses the probability ( $p_{ij}$ ) that the position of  $f_i$  is higher than that of  $f_j$ ,  $\Phi$  being the cumulative distribution function of the standard normal distribution  $z \sim N(0, 1)$ .

Although  $p_{ij}$  is unknown, it can be estimated using the information contained in a set of judgments expressed by

a number ( $m$ ) of experts. The section “Mathematical formulation of the problem” (in the Appendix) explains how to estimate the  $p_{ij}$  values based on the positioning of the objects in the (reconstructed) rankings of experts (Franceschini and Maisano 2019).

Extending the reasoning to all possible pairs of objects, an over-determined system of equations (like the equation in Eq. [1]) can be obtained (Thurstone 1927). Then, this system can be solved by applying the *Generalized Least Squares* (GLS) method (Kariya and Kurata 2004), which allows to obtain an estimate of the mean degree of the attribute of each object:  $\mathbf{X} = [\dots, x_i, \dots]^T$ , expressed on an arbitrary *interval* scale with a relevant dispersion estimation (in the form of the standard deviations:  $\sigma_{x_i} \forall i$ ). For details, see the section “Initial scaling” in the Appendix.

### Transformation on a 0-to-10 scale

Through the following transformation, the scale value of a generic  $i$ -th object ( $x_i$ ) is transformed into a new scale value ( $y_i$ ), which is defined in the conventional range [0, 10]:

$$\mathbf{Y} = \mathbf{Y}(\mathbf{X}) = [\dots, y_i(\mathbf{X}), \dots]^T = \left[ \dots, 10 \cdot \frac{x_i - x_Z}{x_M - x_Z}, \dots \right]^T, \quad (2)$$

where:  $x_Z$  and  $x_M$  are the scale values of  $f_Z$  and  $f_M$  in the initial interval scale;  $x_i$  is the scale value of a generic  $i$ -th object in the initial interval scale;  $y_i$  is the scale value of a generic  $i$ -th object in the new scale (Franceschini and Maisano 2019). Since scale  $y$  “inherits” the *interval* property from scale  $x$  and has a conventional zero point that corresponds to the absence of the attribute (i.e.,  $y_Z = 0$ ), it can be reasonably considered as a *ratio* scale, without any conceptually prohibited “promotion” (Franceschini et al. 2019). The section “Transformation of the initial scaling into the final one” (in the Appendix) illustrates how to determine the standard deviations ( $\sigma_{y_i}$ ) of the  $y_i$  values, by “propagating” the uncertainty of the  $x_i$  values.

### Proposed methodology

This section outlines the proposed methodology; the description will be followed by a practical application to a case study. Finally, we will make a preliminary comparison with the results deriving from the application of a traditional P-FMEA.

### Data collection and processing

Considering a generic P-FMEA, we can identify three separate decision-making problems in which:

- *experts* ( $e_1, e_2, \dots$ ) are the engineers/technicians affiliated to different manufacturing plants of a company/organization of interest;
- *objects* ( $f_1, f_2, \dots$ ) are the failure mode-cause combinations identified in the initial stages of the analysis; for the sake of simplicity, these objects will be hereafter referred to as “failure modes”.
- *attributes* are respectively the risk factors:  $S$  for the first problem,  $O$  for the second problem, and  $D$  for the third problem.

For each of the three risk factors ( $S$ ,  $O$  and  $D$ ), each expert formulates his/her own three distinct (subjective) rankings of the failure modes. In line with what is explained in the “Data collection” section, these rankings may be *incomplete* and – in addition to the *regular* failure modes – they may include two *dummy* failure modes:

$f_Z$  corresponding to a fictitious failure mode of absent severity/occurrence/detection (e.g., a failure mode associated with the rating  $S=1/O=1/D=1$ , according to the traditional FMEA reference tables, such as those in [Table 1](#));

$f_M$  corresponding to a fictitious failure mode of the maximum-imaginable severity/occurrence/detection (e.g., a failure mode associated with the rating  $S=10/O=10/D=10$ , according to the traditional P-FMEA reference tables, such as those in [Table 1](#)).

The rankings related to each risk factor are then aggregated through the application of the  $ZM_{II}$ -technique (see the section “ $ZM_{II}$ -technique”), resulting into a ratio scaling with a corresponding uncertainty estimation ([Franceschini and Maisano 2019](#)). For the risk factors  $S$ ,  $O$  and  $D$ , the resulting scale values related to a generic  $i$ -th failure mode will be conventionally referred to as  $S_i$ ,  $O_i$  and  $D_i$ ; the respective standard deviations will be referred to as  $\sigma_{S_i}$ ,  $\sigma_{O_i}$  and  $\sigma_{D_i}$ . An important difference between the proposed methodology and the traditional P-FMEA is that for the former  $S_i, O_i, D_i \in [1, 10]$ , while for the latter they  $\in [0, 10]$ .

### Aggregation of the three risk factors

For a generic ( $i$ -th) failure mode, the aggregation of the scale values related to the three risk factors can be performed through the classic multiplicative model ([Stamatis 2003](#); [Franceschini et al. 2019](#)):

$$RPN_i = S_i \cdot O_i \cdot D_i. \quad (3)$$

This model implicitly assumes that the three risk factors are equally important. The section “Weighted additive aggregation model” (in the [Appendix](#)) presents an alternative (weighed) additive aggregation model, in which the three risk factors of interest are not necessarily

equally important. In addition, it contains a sensitivity analysis aimed at showing the robustness of the alternative model, with respect to small variations in the weights.

Since the  $S_i$ ,  $O_i$  and  $D_i$  values are defined on *ratio* scales, their product is a permissible operation; on the other hand, we remark that the traditional procedure unduly aggregates quantities defined on *ordinal* scales ([Franceschini et al. 2019](#)).

### Uncertainty calculation

The uncertainty related to the  $RPN_i$  values can be determined by applying the so-called *delta method*, also referred to as *law of propagation of uncertainty* or *error transmission* formula ([JCGM 100:2008 2008](#)). It is thus obtained:

$$\sigma_{RPN_i} = \sqrt{(O_i \cdot D_i)^2 \cdot \sigma_{S_i}^2 + (S_i \cdot D_i)^2 \cdot \sigma_{O_i}^2 + (S_i \cdot O_i)^2 \cdot \sigma_{D_i}^2}, \quad (4)$$

where  $\sigma_{S_i}$ ,  $\sigma_{O_i}$  and  $\sigma_{D_i}$  are the standard deviations associated with the  $S_i$ ,  $O_i$  and the  $D_i$  values, for the  $i$ -th failure mode. The formula in Eq. [4] implicitly neglects the contributions of the correlations between the  $S_i$ ,  $O_i$  and  $D_i$  values. This assumption seems reasonable, considering that the above values derive from three distinct scaling processes.

Assuming that the  $RPN_i$  values are approximately normally distributed, a 95% confidence interval related to each  $RPN_i$  value can be computed as:

$$RPN_i \pm U_{RPN_i} = RPN_i \pm 2 \cdot \sigma_{RPN_i} \quad \forall i, \quad (5)$$

$U_{RPN_i}$  being the *expanded uncertainty* ([JCGM 100:2008 2008](#)) of  $RPN_i$ , with a coverage factor  $k=2$ .

The section “Weighted additive aggregation model” (in the [Appendix](#)) shows a similar uncertainty calculation for a (weighted) additive aggregation model.

### Case study

An important worldwide supplier of thermal systems – which is kept anonymous for reasons of confidentiality – operates predominantly in the automotive sector. This company not only assembles electric compressors, heating-ventilating-and-air-conditioning (HVAC) units, radiators, etc., but also manufactures most of the corresponding components in-house. The focus of this case study is on the production of plastic pipes by injection molding. [Figure 3](#) schematically illustrates (a) the main phases of this process, (b) the typical components manufactured for thermal systems, and (c) the structure of a generic injection-molding press.

**(a) Basic steps of a plastic injection-moulding process**1. *Material preparation:*


- Determine the required amount of thermoplastic material;
- Remove moisture using a dedicated dryer;
- Mix the material with masterbatch (if required).

2. *Process set-up:*

- Clamp the appropriate mould tool in the press;
- Set the required process parameters (pressure, temperature, speed, ...);
- Load thermoplastic granules into the feeder hopper.

3. *Moulding:*

- Material funnels from the hopper down into the (pre-heated) screw;
- Barrel is pre-heated at (different) controlled temperatures along its length;
- Screw rotates, moving the material to fill the mould cavity;
- Material is injected into the feed channels of the mould tool;
- Mould tool is pre-heated at a predefined temperature;
- After a certain cooling time, the mould is opened and the workpiece ejected.

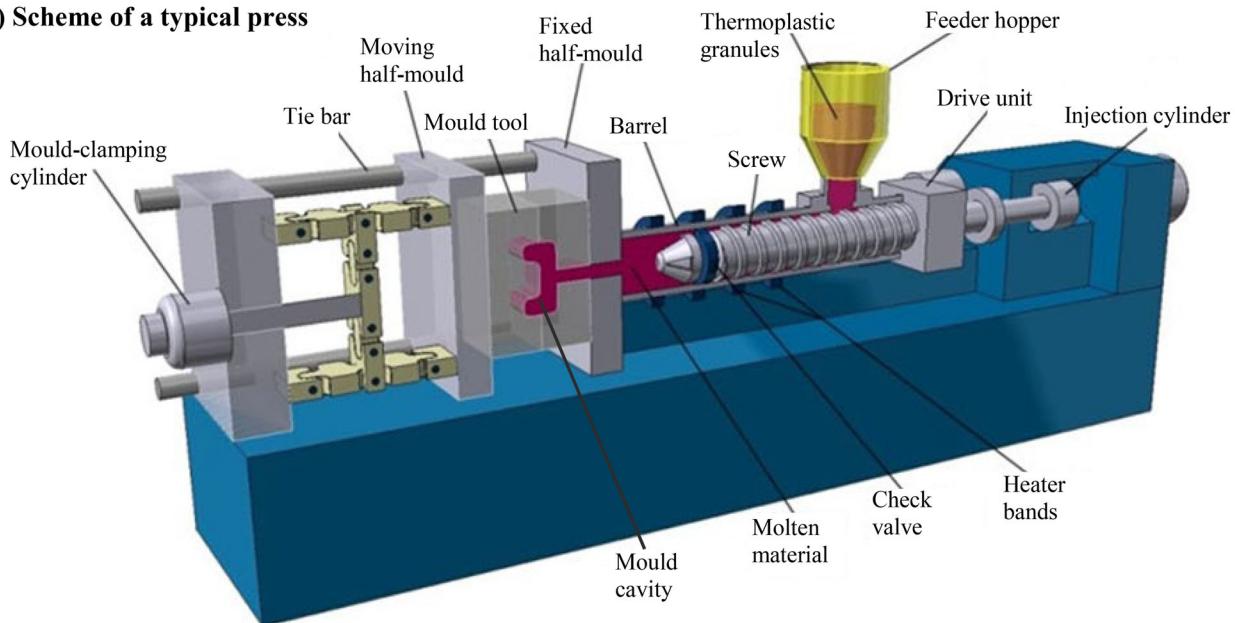**(b) Example of thermal-system components****(c) Scheme of a typical press**


**Figure 3.** Plastic injection-molding process: (a) basic process steps, (b) example of finished components for thermal systems, and (c) scheme of a typical injection-molding press.

In Europe, the company of interest carries out this manufacturing process in four different plants located in four countries (i.e., Germany, Italy, Czech Republic and Spain), as illustrated in Figure 4. The equipment used in the various plants is almost equivalent, as are the types of components manufactured; it is therefore reasonable to expect that equivalent injection-molding processes are likely to be subject to the same failures. Following this reasoning, it would seem appropriate to share the experience accumulated in the various production facilities, in order to improve all processes in a comprehensive manner.

The above four processes are managed by twenty engineers/technicians overall, hereinafter referred to as “experts” (i.e., respectively seven for the German

process, five for the Italian one, four for the Czech one and four for Spanish one, as shown in Figure 4). Given the great difficulty in bringing together all the experts and making them interact to reach shared decisions, the traditional P-FMEA approach would be extremely difficult to manage, especially for activities 7, 8 and 10 in Figure 1, which concern the formulation of collective judgments.

The initial activities of data collection, process description/analysis and determination of failures can be carried out quite easily. These activities are coordinated by a team leader (i.e., expert  $e_1$ , affiliated to process 1), who collects information and technical data from other experts, processing and organizing them appropriately (i.e., activities 1 to 6 and 9 in

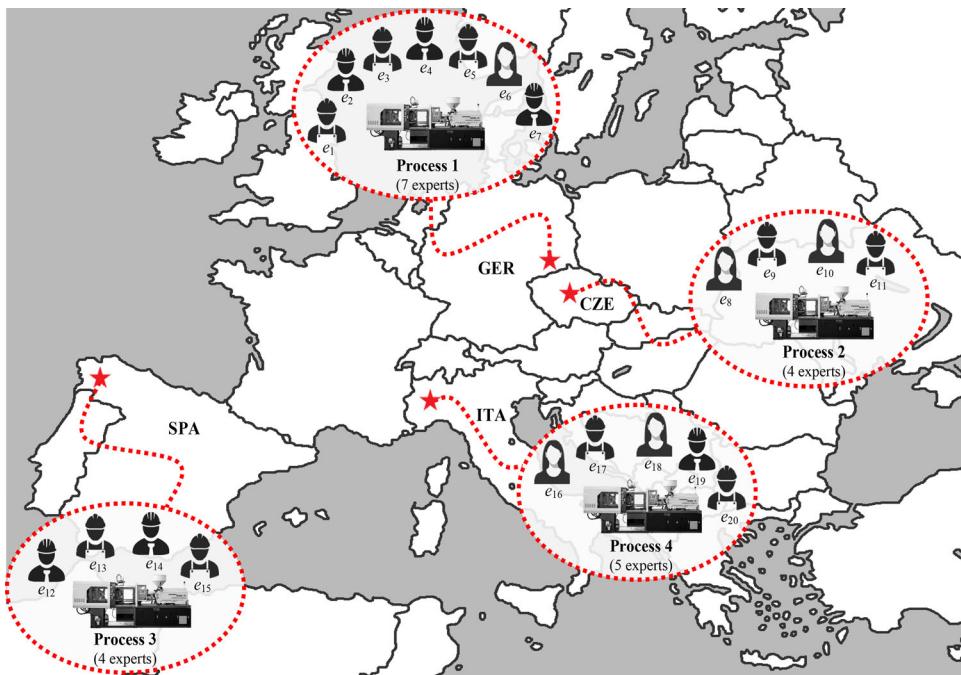

**Figure 4.** Scheme of the four European injection-molding processes of the company of interest, with the corresponding engineers/technicians, referred to as "experts",  $e_1$  to  $e_{20}$ .

Function	Failure modes	Potential effects	(S) Sever.	Failure causes	(O) Occur.	Current process control(s)	(D) Detect.	RPN
A - Material preparation	A.1 - Incorrect material	Some characteristics of the finished product may be (at least partially) compromised		A.1.1 - Error by the operator		Use of a check list		
	A.2 - Wet material	More difficult moulding		A.1.2 - Incorrect material tag		Initial weight check		
B - Material heating/filling	B.1 - Incorrect temperature of some parts of the mould	Material does not fill the mould cavity correctly, making moulding difficult		B.1.1 - Malfunction of the temperature-control system of the screw		Screw-mounted thermocouple		
	B.2 - Malfunction of the temperature-control system of the barrel			B.1.2 - Malfunction of the temperature-control system of the barrel		Barrel-mounted thermocouple		
C - Injection-parameter setting	C.1 - Inadequate pressure	Insufficient filling		C.1.1 - Incorrect setting of pressure parameters		Pressure gauge		
	C.2 - Exaggerated injection speed	Generation of so-called "silver streaks"		C.2.1 - Incorrect setting of speed parameters		Automatic parameter loading		
D - Mould closing	D.1 - Half moulds are not in perfect contact	Plastic threads through the separation plane, resulting in defects		D.1.1 - Insufficient force of the clamping cylinder		Visual inspection		
	D.2 - Deformation of the half-mould pins			D.1.2 - Deformation of the half-mould pins		Pressure gauge		
E - Workpiece rejection	E.1 - Malfunction of the ejection system	Process interruption due to failure to unload the workpiece		E.1.1 - Insufficient draft angles		None		
	E.2 - The moving part of the mould is blocked by the workpiece			E.1.2 - The moving part of the mould is blocked by the workpiece		None		

**Figure 5.** Simplified P-FMEA table related to a plastic injection-molding process.

**Table 2.** Failure mode-cause combinations that will be prioritized according to the risk factors  $S$ ,  $O$ , and  $D$ .

Abbrev.	Failure mode	Failure cause
$f_1$	A.1 – Incorrect material	A.1.1 – Error by the operator
$f_2$	<i>Ibide</i>	A.1.2 – Incorrect material tag
$f_3$	A.2 – Wet material	A.2.1 – Malfunction of the dryer
$f_4$	B.1 – Incorrect temperature of some parts of the mold	B.1.1 – Malfunction of the temperature-control system of the screw
$f_5$	<i>Ibide</i>	B.1.2 – Malfunction of the temperature-control system of the barrel
$f_6$	C.1 – Inadequate pressure	C.1.1 – Incorrect setting of pressure parameters
$f_7$	C.2 – Exaggerated injection speed	C.2.1 – Incorrect setting of speed parameters
$f_8$	D.1 – Half molds are not in perfect contact	D.1.1 – Insufficient force of the clamping cylinder
$f_9$	<i>Ibide</i>	D.1.2 – Deformation of the half-mold pins
$f_{10}$	E.1 – Malfunction of the ejection system	E.1.1 – Insufficient draft angles
$f_{11}$	<i>Ibide</i>	E.1.2 – The moving part of the mold is blocked by the workpiece

Process	Expert	Ranking type	Manage $f_Z/f_M$	$t/b$ value	Order $t/b$ -objects?	Dimension	Ranking
	$e_1$	Complete	Yes	N/A	N/A	$S$	$(f_M \sim f_1 \sim f_2) > f_4 > f_9 > (f_8 \sim f_{11}) > f_5 > f_3 > (f_7 \sim f_6 \sim f_{10} \sim f_1)$
						$O$	$(f_M \sim f_8) > (f_7 \sim f_5) > (f_3 \sim f_2) > f_1 > (f_6 \sim f_{10}) > f_{11} > f_9 > (f_2 \sim f_7)$
						$D$	$f_M > f_9 > (f_6 \sim f_4 \sim f_{11}) > (f_8 \sim f_1 \sim f_3) > f_{10} > (f_5 \sim f_7) > (f_2 \sim f_7)$
	$e_2$	Type- $t$	N/A	2	No	$S$	$\{f_M\} \mid f_1 \mid f_8 \mid f_9 \} > \{f_2\} \mid f_2 \mid f_3 \mid f_4 \mid f_5 \mid f_6 \mid f_7 \mid f_9 \mid f_{10} \mid f_{11}\}$
						$O$	$\{f_M\} \mid f_8 \mid f_{11}\} > \{f_2\} \mid f_1 \mid f_3 \mid f_4 \mid f_5 \mid f_7 \mid f_8 \mid f_9 \mid f_{10}\}$
						$D$	$\{f_M\} \mid f_2 \mid f_6\} > \{f_2\} \mid f_1 \mid f_3 \mid f_4 \mid f_5 \mid f_7 \mid f_8 \mid f_9 \mid f_{10}\}$
	$e_3$	Type- $t \& b$	N/A	3	No	$S$	$\{f_M\} \mid f_1 \mid f_3 \mid f_4 \mid f_5 \mid f_7\} > \{f_2\} \mid f_8 \mid f_6\} > \{f_2\} \mid f_6 \mid f_{10} \mid f_{11}\}$
						$O$	$\{f_M\} \mid f_5 \mid f_8 \mid f_9 \} > \{f_2\} \mid f_4 \mid f_6 \mid f_7 \mid f_{10}\} > \{f_2\} \mid f_1 \mid f_6\}$
						$D$	$\{f_M\} \mid f_6 \mid f_9 \mid f_{10}\} > \{f_1\} \mid f_5 \mid f_8\} > \{f_2\} \mid f_4 \mid f_7 \mid f_{11}\}$
1. GER	$e_4$	Type- $t \& b$	N/A	2	No	$S$	$\{f_M\} \mid f_8 \mid f_{11}\} > \{f_1\} \mid f_3 \mid f_5 \mid f_6 \mid f_7 \mid f_{10}\} > \{f_2\} \mid f_2 \mid f_8 \mid f_1\}$
						$O$	$\{f_M\} \mid f_3 \mid f_5 \mid f_6\} > \{f_1\} \mid f_4 \mid f_6 \mid f_7 \mid f_{10}\} > \{f_2\} \mid f_2 \mid f_8 \mid f_1\}$
						$D$	$\{f_M\} \mid f_2 \mid f_8\} > \{f_1\} \mid f_4 \mid f_6 \mid f_7 \mid f_{10}\} > \{f_2\} \mid f_2 \mid f_8 \mid f_1\}$
	$e_5$	Quasi-complete	No	N/A	N/A	$S$	$\{f_M\} \mid f_2\} > (f_5 \sim f_{10}) > f_9 > (f_1 \sim f_8 \sim f_4 \sim f_1 \sim f_1) > f_6 > \{f_2\} \mid f_3\}$
						$O$	$\{f_M\} \mid f_8\} > (f_4 \sim f_9 \sim f_{11}) > (f_{10} \sim f_5) > f_3 > f_1 > f_6 > \{f_2\} \mid (f_2 \sim f_7)\}$
						$D$	$\{f_M\} \mid f_3\} > (f_2 \sim f_8) > f_{11} > f_5 > f_{10} > (f_4 \sim f_1 \sim f_6) > \{f_2\} \mid (f_9 \sim f_7)\}$
	$e_6$	Type- $t$	N/A	3	No	$S$	$\{f_M\} \mid f_1 \mid f_3 \mid f_4\} > \{f_2\} \mid f_2 \mid f_5 \mid f_6 \mid f_7 \mid f_8 \mid f_9 \mid f_{10}\}$
						$O$	$\{f_M\} \mid f_4 \mid f_5 \mid f_1\} > \{f_2\} \mid f_1 \mid f_3 \mid f_6 \mid f_7 \mid f_8 \mid f_9 \mid f_{10}\}$
						$D$	$\{f_M\} \mid f_5 \mid f_6 \mid f_{11}\} > \{f_2\} \mid f_1 \mid f_4 \mid f_5 \mid f_6 \mid f_7 \mid f_8 \mid f_9 \mid f_{10}\}$
	$e_7$	Type- $t \& b$	N/A	2	No	$S$	$\{f_M\} \mid f_5 \mid f_8 \mid f_9\} > \{f_4\} \mid f_6 \mid f_7 \mid f_{11}\} > \{f_2\} \mid f_3 \mid f_6 \mid f_{10}\}$
						$O$	$\{f_M\} \mid f_2 \mid f_3\} > \{f_4\} \mid f_5 \mid f_8 \mid f_{10}\} > \{f_2\} \mid f_1 \mid f_6 \mid f_7 \mid f_{11}\}$
						$D$	$\{f_M\} \mid f_2 \mid f_3\} > \{f_4\} \mid f_5 \mid f_8 \mid f_{10}\} > \{f_2\} \mid f_1 \mid f_6 \mid f_7 \mid f_{11}\}$
	$e_8$	Type- $t$	Yes	3	Yes	$S$	$(f_M \sim f_1 \sim f_2) > (f_3 \sim f_4 \sim f_5) > \{f_2\} \mid f_5 \mid f_6 \mid f_7 \mid f_8 \mid f_9 \mid f_{10} \mid f_{11}\}$
						$O$	$(f_M \sim f_5) > f_{10} > f_4 > \{f_2\} \mid f_1 \mid f_2 \mid f_3 \mid f_6 \mid f_7 \mid f_8 \mid f_9 \mid f_{11}\}$
						$D$	$f_M > f_6 > f_3 > (f_1 \sim f_7 \sim f_{10}) > \{f_2\} \mid f_2 \mid f_4 \mid f_5 \mid f_8 \mid f_9 \mid f_{11}\}$
2. CZE	$e_9$	Type- $t \& b$	Yes	3	Yes	$S$	$f_M > (f_1 \sim f_3 \sim f_4) > \{f_2\} \mid f_2 \mid f_6 \mid f_8 \mid f_9 \mid f_{11}\} > f_1 > f_{10} > (f_2 \sim f_7)$
						$O$	$(f_M \sim f_5) > f_7 > f_8 > \{f_6\} \mid f_6 \mid f_{10} \mid f_{11}\} > (f_2 \sim f_3 \sim f_4 \sim f_2 \sim f_1)$
						$D$	$f_M > f_2 > f_8 > f_4 > \{f_3\} \mid f_5 \mid f_6 \mid f_7 \mid f_8 \mid f_9 \mid f_{11}\}$
	$e_{10}$	Type- $t$	N/A	2	No	$S$	$\{f_M\} \mid f_3 \mid f_{10}\} > \{f_2\} \mid f_1 \mid f_2 \mid f_4 \mid f_5 \mid f_6 \mid f_7 \mid f_9 \mid f_{11}\}$
						$O$	$\{f_M\} \mid f_5 \mid f_6 \mid f_{10}\} > \{f_2\} \mid f_2 \mid f_3 \mid f_4 \mid f_6 \mid f_7 \mid f_9 \mid f_{11}\}$
						$D$	$\{f_M\} \mid f_3 \mid f_5 \mid f_6 \mid f_9 \mid f_6\} > \{f_1\} \mid f_{10}\} > \{f_2\} \mid f_2 \mid f_6 \mid f_7 \mid f_{11}\}$
	$e_{11}$	Type- $t \& b$	N/A	3	No	$S$	$\{f_M\} \mid f_5 \mid f_8 \mid f_9 \mid f_6 \mid f_1\} > \{f_2\} \mid f_4 \mid f_5 \mid f_6 \mid f_7 \mid f_{11}\}$
						$O$	$\{f_M\} \mid f_1 \mid f_2 \mid f_3 \mid f_6 \mid f_7 \mid f_8\} > \{f_5\} \mid f_{11}\} > \{f_2\} \mid f_4 \mid f_5 \mid f_6\}$
						$D$	$\{f_M\} \mid f_1 \mid f_2 \mid f_3 \mid f_6 \mid f_7 \mid f_8\} > \{f_5\} \mid f_{11}\} > \{f_2\} \mid f_4 \mid f_5 \mid f_6\}$
	$e_{12}$	Type- $t$	Yes	2	Yes	$S$	$f_M > (f_2 \sim f_3 \sim f_4 \sim f_5) > \{f_2\} \mid f_1 \mid f_3 \mid f_6 \mid f_7 \mid f_8 \mid f_9 \mid f_{11}\}$
						$O$	$f_M > f_{10} > (f_6 \sim f_5) > \{f_2\} \mid f_1 \mid f_2 \mid f_3 \mid f_4 \mid f_5 \mid f_6 \mid f_{11}\}$
						$D$	$f_M > f_3 > f_8 > \{f_2\} \mid f_1 \mid f_2 \mid f_4 \mid f_5 \mid f_6 \mid f_7 \mid f_9 \mid f_{11}\}$
3. SPA	$e_{13}$	Type- $t \& b$	Yes	2	Yes	$S$	$(f_M \sim f_1) > (f_7 \sim f_6 \sim f_5) > \{f_2\} \mid f_4 \mid f_5 \mid f_6 \mid f_8\} > f_1 > f_3 > f_2$
						$O$	$f_M > (f_5 \sim f_{11}) > \{f_1\} \mid f_3 \mid f_4 \mid f_7 \mid f_8 \mid f_9 \mid f_{10}\} > f_6 > (f_2 \sim f_7)$
						$D$	$(f_M \sim f_3) > f_4 > \{f_2\} \mid f_1 \mid f_2 \mid f_3 \mid f_5 \mid f_6 \mid f_7 \mid f_9 \mid f_{11}\} > (f_6 \sim f_2 \sim f_1)$
	$e_{14}$	Type- $t$	N/A	3	No	$S$	$\{f_M\} \mid f_5 \mid f_8 \mid f_9 \mid f_6 \mid f_1\} > \{f_2\} \mid f_1 \mid f_2 \mid f_3 \mid f_4 \mid f_6 \mid f_7 \mid f_9 \mid f_{11}\}$
						$O$	$\{f_M\} \mid f_5 \mid f_6 \mid f_8 \mid f_9 \mid f_10\} > \{f_2\} \mid f_1 \mid f_2 \mid f_3 \mid f_4 \mid f_6 \mid f_7 \mid f_9 \mid f_{11}\}$
						$D$	$\{f_M\} \mid f_2 \mid f_4 \mid f_8\} > \{f_2\} \mid f_1 \mid f_3 \mid f_5 \mid f_6 \mid f_7 \mid f_9 \mid f_{11}\}$
	$e_{15}$	Type- $t \& b$	No	2	Yes	$S$	$\{f_M\} \mid f_2 \mid f_7 \mid f_3 \mid f_6 \mid f_9\} > \{f_3\} \mid f_4 \mid f_5 \mid f_6 \mid f_7 \mid f_8 \mid f_9 \mid f_{11}\}$
						$O$	$\{f_M\} \mid f_5 \mid f_6 \mid f_7 \mid f_8 \mid f_9 \mid f_{11}\} > \{f_1\} \mid f_3 \mid f_4 \mid f_6 \mid f_7 \mid f_9 \mid f_{11}\}$
						$D$	$\{f_M\} \mid f_2 \mid f_3 \mid f_6 \mid f_7 \mid f_8 \mid f_9 \mid f_{11}\} > \{f_3\} \mid f_4 \mid f_5 \mid f_6 \mid f_7 \mid f_8 \mid f_9 \mid f_{11}\}$
	$e_{16}$	Type- $t$	Yes	1	Yes	$S$	$(f_M \sim f_1) > \{f_2\} \mid f_2 \mid f_3 \mid f_4 \mid f_5 \mid f_6 \mid f_7 \mid f_8 \mid f_9 \mid f_{11}\}$
						$O$	$(f_M \sim f_5) > \{f_2\} \mid f_1 \mid f_2 \mid f_3 \mid f_4 \mid f_5 \mid f_6 \mid f_7 \mid f_8 \mid f_{11}\}$
						$D$	$f_M > f_3 > f_8 > \{f_2\} \mid f_1 \mid f_2 \mid f_4 \mid f_5 \mid f_6 \mid f_7 \mid f_9 \mid f_{11}\}$
	$e_{17}$	Type- $t \& b$	No	3	Yes	$S$	$\{f_M\} \mid f_1 \} > f_5 > f_6 > \{f_2\} \mid f_1 \mid f_2 \mid f_3 \mid f_4 \mid f_5 \mid f_6 \mid f_7 \mid f_8 \mid f_9 \mid f_{11}\}$
						$O$	$\{f_M\} \mid f_{10}\} > f_5 > f_6 > \{f_2\} \mid f_1 \mid f_2 \mid f_3 \mid f_4 \mid f_5 \mid f_6 \mid f_7 \mid f_8 \mid f_9 \mid f_{11}\}$
						$D$	$\{f_M\} \mid f_2 \mid f_3 > f_5 > \{f_2\} \mid f_1 \mid f_2 \mid f_3 \mid f_4 \mid f_5 \mid f_6 \mid f_7 \mid f_8 \mid f_9 \mid f_{11}\}$
4. ITA	$e_{18}$	Type- $t$	No	2	Yes	$S$	$\{f_M\} \mid f_1 \mid f_2 \mid f_3 \mid f_4 \mid f_5 \mid f_6 \mid f_7 \mid f_8 \mid f_9 \mid f_{11}\} > f_5 > f_3 > f_2$
						$O$	$\{f_M\} \mid f_5 \mid f_6 \mid f_7 \mid f_8 \mid f_9 \mid f_{11}\} > f_1 > f_2 > f_3 > f_4 > f_5 > f_6 > f_7 > f_8 > f_9 > f_{11}$
						$D$	$\{f_M\} \mid f_1 \mid f_2 \mid f_3 \mid f_4 \mid f_5 \mid f_6 \mid f_7 \mid f_8 \mid f_9 \mid f_{11}\} > f_5 > f_3 > f_2 > f_1$
	$e_{19}$	Type- $t \& b$	Yes	1	Yes	$S$	$(f_M \sim f_1) > \{f_3\} \mid f_4 \mid f_5 \mid f_6 \mid f_7 \mid f_8 \mid f_9 \mid f_{11}\} > f_5 > f_3 > f_2$
						$O$	$(f_M \sim f_3) > \{f_4\} \mid f_5 \mid f_6 \mid f_7 \mid f_8 \mid f_9 \mid f_{11}\} > f_5 > f_3 > f_2$
						$D$	$(f_M \sim f_3) > \{f_1\} \mid f_2 \mid f_3 \mid f_4 \mid f_5 \mid f_6 \mid f_7 \mid f_8 \mid f_9 \mid f_{11}\} > f_5 > f_3 > f_2$
	$e_{20}$	Type- $t$	No	3	Yes	$S$	$\{f_M\} \mid f_3 \} > (f_4 \sim f_7 \sim f_9) > \{f_2\} \mid f_1 \mid f_2 \mid f_3 \mid f_4 \mid f_5 \mid f_6 \mid f_7 \mid f_8 \mid f_9 \mid f_{11}\}$
						$O$	$\{f_M\} \mid f_3 \} > (f_6 \sim f_7 \sim f_8) > \{f_2\} \mid f_1 \mid f_2 \mid f_3 \mid f_4 \mid f_5 \mid f_6 \mid f_7 \mid f_8 \mid f_9 \mid f_{11}\}$
						$D$	$\{f_M\} \mid f_3 \} > (f_6 \sim f_7 \sim f_8) > \{f_2\} \mid f_1 \mid f_2 \mid f_3 \mid f_4 \mid f_5 \mid f_6 \mid f_7 \mid f_8 \mid f_9 \mid f_{11}\}$

**Figure 6.** (Incomplete) rankings of failure modes, formulated by the experts for each of the three risk factors. Referring to the rankings in the last column, the failure modes identified directly by the experts are marked in black, while the reconstructed parts are marked in red.

Figure 1). The results of the initial activities are summarized (in a simplified way) in the P-FMEA table in Figure 5, in which seven failure modes (A.1, A.2, B.1,

etc.) and eleven relevant failure causes (A.1.1, A.1.2, A.2.1, etc.) have been determined. Table 2 shows the resulting failure mode-cause combinations ( $f_1$  to  $f_{11}$ ),

which should be prioritized according to the three risk factors.

The parts concerning the collective assignment of the  $S$ ,  $O$  and  $D$  scores and the aggregation of the aforesaid scores through  $RPN$  have been intentionally left incomplete. These parts will be completed using the new dP-FMEA approach, which replaces collective expert judgments with the aggregation of individual judgments.

The rankings formulated by the experts are shown in Figure 6. It can be noted that most of the experts have opted for the formulation of incomplete rankings, since they are simpler and faster. For each ranking, it is specified: (i) the ranking type (complete, quasi-complete, Type- $t\&b$  or Type- $t$ ), (ii) whether or not the two dummy failure modes have been included by the expert (“Manage  $f_Z/f_M$ ?”), (iii) the value of the parameters  $t$  and  $b$ , in the case of Type- $t\&b$  and Type- $t$  rankings, and (iv) if the  $t/b$ -objects are ordered or not. Figure 6 also shows that rankings related to the same risk factor can be very different from each other, denoting a certain inter-expert disagreement. For instance, while the majority of experts included the object  $f_8$  among the top positions of their  $O$ -rankings, other experts – such as  $e_8$ ,  $e_{10}$  and  $e_{12}$  – excluded it from the top positions. This makes us reflect on the actual difficulty of experts to converge toward collective judgments in the traditional P-FMEA; in addition, the opinion of younger and less experienced experts may not infrequently be inhibited/conditioned by that of senior experts. Being based on the formulation of individual judgments, the proposed response mode will avoid this.


The rankings related to each risk factor are then aggregated through the application of the  $ZM_{II}$ -technique; results are reported in the first seven columns of Table 3.

Next, the  $RPN_i$  values of the failure modes and the respective uncertainties are determined by applying Eqs. [3], [4] and [5]; these results are contained in the last three columns of Table 3. It can be noticed that the expanded-uncertainty values of the failure modes are relatively large, due to the uncertainty propagation. The most critical failure modes – i.e. those deserving more attention when planning possible corrective actions – are those with higher  $RPN_i$  values (see also the Pareto chart in Figure 7).

The relatively wide uncertainty bands indicate that the  $RPN_i$  alone is a “myopic” indicator, since it may perform differentiations that are unfounded from a statistical point of view. For instance, while it makes sense to say that  $f_8$  is certainly more critical than  $f_2$  or

**Table 3.** Results of the application of the proposed methodology to the case study, in terms of mean and standard deviation of the  $S_i$ ,  $O_i$ ,  $D_i$  values and corresponding  $RPN_i$  values.

$S_i$ values	$O_i$ values		$D_i$ values		$RPN_i$ values				
	Mean	St.dev.	Mean	St.dev.	Mean	St.dev.	$U_{RPN_i} = 2 \cdot \sigma_{RPN_i}$		
$f_1$	7.69	0.51	2.03	0.60	3.01	0.55	46.9	16.5	33.0
$f_2$	6.91	0.51	2.23	0.58	5.19	0.51	79.9	22.9	45.8
$f_3$	4.88	0.52	2.69	0.55	7.46	0.55	98.0	23.8	47.6
$f_4$	5.60	0.53	4.14	0.51	4.48	0.52	103.8	20.1	40.2
$f_5$	5.80	0.52	8.06	0.56	4.14	0.54	193.7	33.4	66.8
$f_6$	2.71	0.61	4.57	0.52	4.82	0.51	59.5	16.3	32.6
$f_7$	3.76	0.54	4.05	0.54	3.05	0.56	46.4	12.4	24.8
$f_8$	5.08	0.54	6.93	0.56	5.54	0.52	195.1	31.7	63.4
$f_9$	5.96	0.52	4.26	0.54	4.23	0.51	107.1	20.9	41.8
$f_{10}$	3.36	0.55	5.74	0.52	4.03	0.53	77.7	17.8	35.6
$f_{11}$	2.09	0.66	5.27	0.52	3.29	0.55	36.3	13.5	27.0

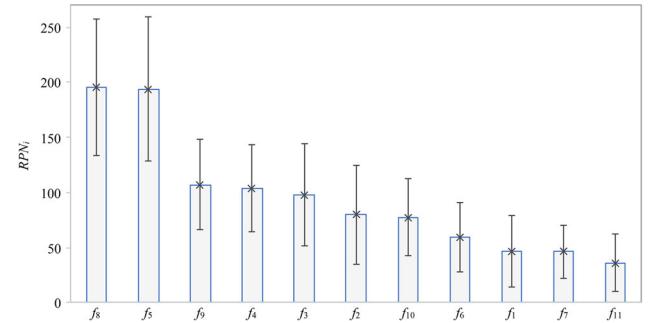

**Figure 7.** Pareto chart of the failure modes based on their  $RPN_i$  values and relevant expanded-uncertainty ( $U_{RPN_i}$ ) bands (data in Table 3).


**Table 4.**  $S_i$ ,  $O_i$  and  $D_i$ -scores from the implementation of the traditional P-FMEA to the case study. Subsequently, the above scores are aggregated in the  $RPN_i$  values (last column), using the multiplicative model of Eq. [3].

	$S_i$	$O_i$	$D_i$	$RPN_i$
$f_1$	7.69	2.03	3.01	46.9
$f_2$	6.91	2.23	5.19	79.9
$f_3$	4.88	2.69	7.46	98.0
$f_4$	5.60	4.14	4.48	103.8
$f_5$	5.80	8.06	4.14	193.7
$f_6$	2.71	4.57	4.82	59.5
$f_7$	3.76	4.05	3.05	46.4
$f_8$	5.08	6.93	5.54	195.1
$f_9$	5.96	4.26	4.23	107.1
$f_{10}$	3.36	5.74	4.03	77.7
$f_{11}$	2.09	5.27	3.29	36.3

$f_6$  (being the uncertainty band of the former not superimposed on those of the latter two), it can not necessarily be said that  $f_2$  deserves priority over  $f_6$  (being the relevant uncertainty bands superimposed).

These considerations give the team a few more degrees of freedom in the choice of corrective actions, perhaps taking into account other external constraints (such as cost, technical difficulty, time required, etc.).

Additionally, we note that failure modes with higher  $RPN_i$  values tend to have higher uncertainty. This sort of *heteroschedasticity* depends on the

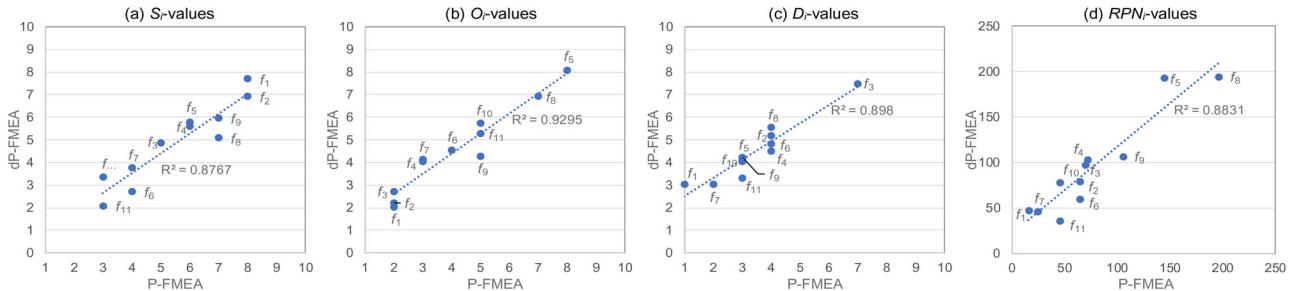

**Figure 8.** Qualitative comparison between the results of the new dP-FMEA and the traditional P-FMEA, with reference to the case study. The comparison is made in terms of (a)  $S_i$ , (b)  $O_i$ , (c)  $D_i$ , and (d)  $RPN_i$ -values. In all cases there is a strong correlation ( $R^2$  values very close to 90%).

multiplicative aggregation model of  $S$ ,  $O$  and  $D$  (Eq. [3]) (Ross 2014). Another limitation of this aggregative model is that it does not allow to weigh the contributions of  $S$ ,  $O$  and  $D$ , which are actually considered as equally important. The section “Weighted additive aggregation model” (in the Appendix) exemplifies the application of a (weighted) additive aggregation model, showing the results with their respective uncertainty.

After prioritizing failure modes, P-FMEA continues with the iterative definition and implementation of corrective actions, as illustrated in Figure 1. Like a traditional P-FMEA, this activity requires the coordination of the team leader who interacts with individual experts.

### Comparison with traditional P-FMEA

As a further verification of the validity of the results provided by the proposed technique, this section contains a preliminary comparison with the results deriving from a traditional P-FMEA. To do this, we reconsidered the case study, asking the experts to collectively assign  $S$ ,  $O$  and  $D$  scores to each combination of failure mode-cause, in line with the traditional P-FMEA procedure (phases 7, 8 and 10 of the flowchart in Figure 1). Unfortunately, due to the great difficulty in bringing together and coordinating a large number of experts affiliated in different and often remote production facilities, it was possible to bring together concurrently only four out of these twenty experts(!):  $e_1$ ,  $e_2$ ,  $e_8$  and  $e_{16}$ . Despite its small size, this subset of experts consists of engineers with relatively high experience, who are responsible for guiding and coordinating manufacturing activities in three different European plants (see Figure 4). Therefore, this subset can be considered as sufficiently representative of all experts.

Table 4 contains the  $S_i$ ,  $O_i$  and  $D_i$ -scores collectively assigned to the eleven failure modes ( $f_1$  to  $f_{11}$ , cf. Table 2). Subsequently, for each ( $i$ -th) failure mode, the corresponding scores were aggregated in the

composite indicator  $RPN_i$ , according to the traditional multiplicative model in Eq. [3]. We note that, being the above mentioned scores  $\in [1, 10]$ , the resulting  $RPN_i$  values  $\in [1, 1000]$ . On the other hand, being the  $S_i$ ,  $O_i$  and  $D_i$ -scale values from the dP-FMEA approach  $\in [0, 10]$ , the resulting  $RPN_i$  values  $\in [0, 1000]$ . Despite this slight discrepancy, it is possible to make a quantitative comparison between the results deriving from the two approaches, as illustrated by the graphs in Figure 8.

Precisely, there is a strong correlation between the data resulting from the two approaches; see respectively the graphs in Figure 8(a), (b) and (c) ( $R^2$  determination coefficients very close to 90%). An analogous correlation between the corresponding  $RPN_i$  values can be observed, denoting a sort of “convergent validity” between the new dP-FMEA approach and that of the traditional P-FMEA, keeping in mind the major practical advantages of the former with respect to the latter (Hair et al. 2017).

### Conclusions

This paper illustrated the innovative dP-FMEA approach, which can be applied to distributed manufacturing environments. This approach is potentially more suitable than the traditional P-FMEA, for several practical reasons:

- The procedure allows to manage dozens of experts, without requiring them to physically meet and make collective decisions. In addition, the procedure considers the precious contribution of all the experts – concept of “wisdom of crowds” (Cai et al. 2017) – even the younger/weaker ones, who are not infrequently inhibited in the traditional P-FMEA group sessions (Geramian et al. 2019a).
- The method includes a flexible response mode, which does not force experts to make detailed judgments, even in case of hesitation.

- Unlike the traditional P-FMEA and other variants in the scientific literature, the proposed procedure provides an estimation of the uncertainty of the results obtained (Franceschini and Galetto 2001; Das Adhikary et al. 2014; Liu et al. 2018, 2019b; Li et al. 2019). This aspect is far from being insignificant since it gives the expert team more freedom in planning possible corrective actions.
- The methodology can be easily implemented using an *ad hoc* software application developed by the authors (in MS Excel – VBA environment), which is available on request.
- The proposed methodology allows to overcome some widely debated shortcomings of the traditional P-FMEA, such as:
  1. It does not require the use of arbitrary reference tables for the assignment of *S*, *O* and *D* scores (e.g., those exemplified in Table 1);
  2. It does not introduce any unduly “promotion” of the scales on which expert judgments are defined (Franceschini et al. 2019).

Although there is no absolute reference (“gold standard”) to evaluate the validity of the proposed procedure, a preliminary comparison with the traditional P-FMEA procedure shows a certain agreement between the results obtained (concept of “convergent validity”). It should also be noted that the  $ZM_{II}$ -technique – which is used in the first phase of the proposed procedure – is a widely validated and consolidated that is strictly related to the traditional LCJ (Thurstone 1927; Edwards 1957; Gulliksen 1956; Franceschini and Maisano 2019). This constitutes a certain guarantee of the soundness of the results provided.

The proposed procedure has some limitations:

- The way of determining the  $RPN_i$  values is more laborious than for the traditional P-FMEA.
- The proposed response mode, although being flexible, represents a novelty with respect to the traditional one, which is based on the use of reference tables. This could create some problems, especially for more experienced users that are accustomed to the traditional procedure.

Regarding the future, we plan to develop a variant of the dP-FMEA approach, in which experts are not equally important, but are characterized by a hierarchy of importance.

## About the authors

Domenico A. Maisano is an Associate Professor of Quality Engineering at the Department of Management and Production Engineering (Politecnico di Torino – Italy). He is author or coauthor of many published papers in prestigious scientific journals, and international conference proceedings. His main scientific interests are in the areas of Quality Engineering, Industrial Metrology and QFD. He was a member of *Quality Engineering* Editorial Board. Maisano may be contacted at [domenico.maisano@polito.it](mailto:domenico.maisano@polito.it)

Fiorenzo Franceschini is Professor of Quality Engineering at Politecnico di Torino (Italy) – Department of Management and Production Engineering. He is author or coauthor of eight books and many published papers in prestigious scientific journals, and international conference proceedings. His current research interests focus on Quality Engineering, Process Indicators and QFD. He is a member of ASQ. Franceschini may be contacted at [fiorenzo.franceschini@polito.it](mailto:fiorenzo.franceschini@polito.it)

Dario Antonelli is an Associate Professor of Manufacturing at the Department of Management and Production Engineering (Politecnico di Torino – Italy). He is author or coauthor of many published papers in prestigious scientific journals, and international conference proceedings. His main scientific interests are in the areas of Manufacturing and Collaborative Robotics. Antonelli may be contacted at [dario.antonelli@polito.it](mailto:dario.antonelli@polito.it)

## References

- AIAG (Automotive Industry Action Group) and VDA (Verband der Automobilindustrie). 2019. *Failure mode and effects analysis – Design FMEA and process FMEA handbook*. Southfield, MI.
- Aludaat, K. M., and M. T. Alodat. 2008. A note on approximating the normal distribution function. *Applied Mathematical Sciences* 2 (9):425–9. doi:[10.12988/ams.2018.8241](https://doi.org/10.12988/ams.2018.8241).
- Cai, C. G., X. H. Xu, P. Wang, and X. H. Chen. 2017. A multi-stage conflict style large group emergency decision-making method. *Soft Computing* 21 (19):5765–78. doi:[10.1007/s00500-016-2155-5](https://doi.org/10.1007/s00500-016-2155-5).
- Certa, A., F. Hopps, R. Inghilleri, and C. M. La Fata. 2017. A Dempster-Shafer Theory-based approach to the failure mode, effects and criticality analysis (FMECA) under epistemic uncertainty: Application to the propulsion system of a fishing vessel. *Reliability Engineering & System Safety* 159:69–79. doi:[10.1016/j.ress.2016.10.018](https://doi.org/10.1016/j.ress.2016.10.018).
- Conrad, F.G., M. P. Couper, R. Tourangeau, M. Galesic, and T. Yan. 2005. Interactive feedback can improve the quality of responses in web surveys. In *Proc. Surv. Res. Meth. Sect. Am. Statist. Ass.*, 3835–40.
- Das Adhikary, D., G. Kumar Bose, D. Bose, and S. Mitra. 2014. Multi criteria FMECA for coal-fired thermal power plants using COPRAS-G. *International Journal of Quality & Reliability Management* 31 (5):601–14. doi:[10.1108/IJQRM-04-2013-0068](https://doi.org/10.1108/IJQRM-04-2013-0068).
- Edwards, A. L. 1957. *Techniques of attitude scale construction*. New York: Irvington Publishers.

- Fabbris, L. 2013. Measurement scales for scoring or ranking sets of interrelated items. In *Survey data collection and integration*, 21–43. Berlin, Heidelberg: Springer.
- Franceschini, F., and M. Galetto. 2001. A new approach for evaluation of risk priorities of failure modes in FMEA. *International Journal of Production Research* 39 (13): 2991–3002. doi:10.1080/00207540110056162.
- Franceschini, F., and D. Maisano. 2019. Fusing incomplete preference rankings in design for manufacturing applications through the ZMII-technique. *The International Journal of Advanced Manufacturing Technology* 103 (9–12):3307–22. doi:10.1007/s00170-019-03675-5.
- Franceschini, F., M. Galetto, and D. Maisano. 2019. *Designing performance measurement systems: theory and practice of key performance indicators*. Book series Management for Professionals. Berlin: Springer Nature.
- Geramian, A., A. Abraham, and M. Ahmadi Nozari. 2019a. Fuzzy logic-based FMEA robust design: A quantitative approach for robustness against groupthink in group/team decision-making. *International Journal of Production Research* 57 (5):1331–44. doi:10.1080/00207543.2018.1471236.
- Geramian, A., A. Shahin, B. Minaei, and J. Antony. 2019b. Enhanced FMEA: An integrative approach of fuzzy logic-based FMEA and collective process capability analysis. *Journal of the Operational Research Society*, doi:10.1080/01605682.2019.1606986.
- Guerrero, H. H., and J. R. Bradley. 2013. Failure modes and effects analysis: An evaluation of group versus individual performance. *Production and Operations Management* 22 (6):1524–39. doi:10.1111/j.1937-5956.2012.01363.x.
- Gulliksen, H. 1956. A least squares solution for paired comparisons with incomplete data. *Psychometrika* 21 (2): 125–34. doi:10.1007/BF02289093.
- Hair, J. F., G. T. M. Hult, C. Ringle, and M. Sarstedt. 2017. *A primer on partial least squares structural equation modeling (PLS-SEM)*. 2nd ed. Thousand Oaks, CA: SAGE.
- Harzing, A.-W., J. Balduzeta, W. Barner-Rasmussen, C. Barzantny, A. Canabal, A. Davila, A. Espejo, R. Ferreira, A. Giroud, K. Koester, et al. 2009. Rating versus ranking: What is the best way to reduce response and language bias in cross-national research? *International Business Review* 18 (4):417–32. doi:10.1016/j.ibusrev.2009.03.001.
- Huang, J., H. C. Liu, C. Y. Duan, and M. S. Song. 2019. An improved reliability model for FMEA using probabilistic linguistic term sets and TODIM method. *Annals of Operations Research* 1–24. doi:10.1007/s10479-019-03447-0.
- Indrawati, S., and M. Ridwansyah. 2015. Manufacturing continuous improvement using lean six sigma: An iron ores industry case application. *Procedia Manufacturing* 4: 528–34. doi:10.1016/j.promfg.2015.11.072.
- JCGM 100:2008. 2008. *Evaluation of measurement data – Guide to the expression of uncertainty in measurement*. Paris: BIPM.
- Johnson, K. G., and M. K. Khan. 2003. A study into the use of the process failure mode and effects analysis (PFMEA) in the automotive industry in the UK. *Journal of Materials Processing Technology* 139 (1–3):348–56. doi:10.1016/S0924-0136(03)00542-9.
- Kariya, T., and H. Kurata. 2004. *Generalized least squares*. New York: John Wiley & Sons.
- Lagerspetz, E. 2016. *Social choice and democratic values*. Heidelberg: Springer.
- Li, G. F., Y. Li, C. H. Chen, J. L. He, T. W. Hou, and J. H. Chen. 2019. Advanced FMEA method based on interval 2-tuple linguistic variables and TOPSIS. *Quality Engineering*, doi:10.1080/08982112.2019.1677913.
- Liu, H. C. 2019. FMEA for proactive healthcare risk analysis: A systematic literature review. In *Improved FMEA methods for proactive healthcare risk analysis*, 15–45. Singapore: Springer.
- Liu, H. C., X. Y. You, F. Tsung, and P. Ji. 2018. An improved approach for failure mode and effect analysis involving large group of experts: An application to the healthcare field. *Quality Engineering* 30 (4):762–75. doi:10.1080/08982112.2018.1448089.
- Liu, H. C., X. Q. Chen, C. Y. Duan, and Y. M. Wang. 2019a. Failure mode and effect analysis using multi-criteria decision making methods: A systematic literature review. *Computers & Industrial Engineering* 135:881–97. doi:10.1016/j.cie.2019.06.055.
- Liu, H. C., J. X. You, M. M. Shan, and Q. Su. 2019b. Systematic failure mode and effect analysis using a hybrid multiple criteria decision-making approach. *Total Quality Management & Business Excellence* 30 (5–6):537–64. doi:10.1080/14783363.2017.1317585.
- Matt, D. T., E. Rauch, and P. Dallasega. 2015. Trends towards distributed manufacturing systems and modern forms for their design. *Procedia CIRP* 33:185–90. doi:10.1016/j.procir.2015.06.034.
- O'Connor, P., and A. Kleyner. 2012. *Practical reliability engineering*. 5th ed. Chichester (UK): John Wiley & Sons.
- Paruolo, P., M. Saisana, and A. Saltelli. 2013. Ratings and rankings: Voodoo or science? *Journal of the Royal Statistical Society: Series A (Statistics in Society)* 176 (3): 609–34. doi:10.1111/j.1467-985X.2012.01059.x.
- Roberts, F. S. 1979. Measurement theory: With applications to decision making, utility, and the social sciences. In *Encyclopedia of mathematics and its applications*, vol. 7. Reading, MA: Addison-Wesley.
- Ross, S. M. 2014. *Introduction to probability and statistics for engineers and scientists*. Amsterdam: Academic Press.
- Srai, J. S., M. Kumar, G. Graham, W. Phillips, J. Tooze, S. Ford, P. Beecher, B. Raj, M. Gregory, M. K. Tiwari, et al. 2016. Distributed manufacturing: Scope, challenges and opportunities. *International Journal of Production Research* 54 (23):6917–35. doi:10.1080/00207543.2016.1192302.
- Stamatis, D. H. 2003. *Failure mode and effect analysis: FMEA from theory to execution*. Milwaukee (Wisconsin): ASQ Quality Press.
- Tague, N. R. 2005. *The quality toolbox*. 2nd ed., 236–42. Milwaukee (Wisconsin): ASQ Quality Press.
- Thurstone, L. L. 1927. A law of comparative judgment. *Psychological Review* 34 (4):273–86. doi:10.1037/h0070288.
- Vora, A., C. N. Paunwala, and M. Paunwala. 2014. Improved weight assignment approach for multimodal fusion. In *Proceedings of the 2014 International Conference on Circuits, Systems, Communication and Information Technology Applications (CSCITA 2014)*, 70–74.

- Wang, B., J. Liang, and Y. Qian. 2015. Determining decision makers' weights in group ranking: A granular computing method. *International Journal of Machine Learning and Cybernetics* 6 (3):511–21. doi:10.1007/s13042-014-0278-5.
- Yeh, T. M., and L. Y. Chen. 2014. Fuzzy-based risk priority number in FMEA for semiconductor wafer processes. *International Journal of Production Research* 52 (2): 539–49. doi:10.1080/00207543.2013.837984.
- Zhou, Y., J. Xia, Y. Zhong, and J. Pang. 2016. An improved FMEA method based on the linguistic weighted geometric operator and fuzzy priority. *Quality Engineering* 28 (4):491–8. doi:10.1080/08982112.2015.1132320.

## Appendix

### Detailed description of the $ZM_{II}$ -technique

This section provides a detailed description of the  $ZM_{II}$ -technique and is organized into three sub-sections, which respectively illustrate (i) the mathematical formulation of the decision-making problem of interest, (ii) the determination of an initial scaling, and (iii) the “transformation” of this initial scaling into a *ratio* scaling, with relevant uncertainty estimation.

#### Mathematical formulation of the problem

The mathematical formalization of the problem relies on the postulates and simplifying assumptions of the *Law of Comparative Judgment* (LCJ) by Thurstone. Precisely, Thurstone (1927) postulated the existence of a *psychological continuum*, i.e. an abstract and unknown unidimensional scale, in which objects are positioned depending on the degree of a certain attribute – i.e. a specific feature of the objects, which evokes a subjective response in each expert. In the context of P-FMEA, possible attributes are the *severity*, *occurrence* and *detection* of the failure modes (objects).

The position of a generic  $i$ -th object is postulated to be distributed normally, in order to reflect the intrinsic expert-to-expert variability:  $f_i \sim N(x_i, \sigma_{x_i}^2)$ , where  $x_i$  and  $\sigma_{x_i}^2$  are the unknown mean value and variance related to the degree of the attribute of that object. Considering two generic objects,  $f_i$  and  $f_j$ , it can therefore be asserted that:

$$f_i - f_j \sim N(x_i - x_j, \sigma_{x_i}^2 + \sigma_{x_j}^2 - 2 \cdot \rho_{x_i x_j} \cdot \sigma_{x_i} \cdot \sigma_{x_j}) \quad (\text{A.1})$$

where  $\rho_{x_i x_j}$  is the *Pearson coefficient*, denoting the correlation between the positions of objects  $f_i$  and  $f_j$  (Ross 2014). The probability that the position of  $f_i$  is higher than that of  $f_j$  can be expressed as:

$$\begin{aligned} p_{ij} &= P[(f_i - f_j) > 0] \\ &= 1 - \Phi \left[ \frac{0 - (x_i - x_j)}{\sqrt{\sigma_{x_i}^2 + \sigma_{x_j}^2 - 2 \cdot \rho_{x_i x_j} \cdot \sigma_{x_i} \cdot \sigma_{x_j}}} \right], \end{aligned} \quad (\text{A.2})$$

$\Phi$  being the cumulative distribution function of the standard normal distribution  $z \sim N(0, 1)$ .

The LCJ (*case V*) includes the following additional simplifying assumptions (Thurstone 1927; Edwards 1957):  $\sigma_{x_i}^2 = \sigma^2 \forall i$ ,  $\rho_{x_i x_j} = \rho, \forall i, j$ , and  $2 \cdot \sigma^2 \cdot (1 - \rho) = 1$ . Eq. [A.2] can therefore be expressed as:

$$p_{ij} = 1 - \Phi[-(x_i - x_j)]. \quad (\text{A.3})$$

Although  $p_{ij}$  is unknown, it can be estimated using the information contained in a set of (subjective) judgments by a number ( $m$ ) of experts ( $e_1, e_2, \dots$ ) (Thurstone 1927). In fact, experts formulate rankings of the objects, which can be decomposed into paired-comparison relationships of *strict dominance* (e.g., “ $f_i > f_j$ ” or “ $f_i < f_j$ ”), *indifference* (e.g., “ $f_i \sim f_j$ ”) or *incomparability* (e.g., “ $f_i \parallel f_j$ ”) (Franceschini and Maisano 2019). For the purpose of example, the four-object ranking “ $(f_1 \parallel f_2) > (f_3 \sim f_4)$ ” can be decomposed into the following  $C_4^4 = 6$  paired-comparison relationships: “ $f_1 \parallel f_2$ ”, “ $f_1 > f_3$ ”, “ $f_1 > f_4$ ”, “ $f_2 > f_3$ ”, “ $f_2 > f_4$ ”, and “ $f_3 \sim f_4$ ”.

Then, for each expert for which  $f_i > f_j$ , a frequency indicator  $k_{ij}$  is incremented by one unit. In the case the two objects are considered indifferent,  $k_{ij}$  is conventionally incremented by 0.5, so that:

$$k_{ij} = m_{ij} - k_{ji}, \quad (\text{A.4})$$

$m_{ij}$  being the total number of experts from which it is possible to obtain a relationship of strict dominance or indifference for the  $i, j$ -th paired comparison. These two types of relationships are called “usable” because they can contribute to the  $p_{ij}$  estimation, as shown below. In general,  $m_{ij} \leq m$  since for some experts it is possible to obtain only a relationship of incomparability.

The observed proportion of experts for which the degree of the attribute of  $f_i$  is higher than that of  $f_j$  can be used to estimate the unknown probability  $p_{ij}$ :

$$\hat{p}_{ij} = \frac{k_{ij}}{m_{ij}}. \quad (\text{A.5})$$

Of course, the relationship of complementarity  $\hat{p}_{ij} = 1 - \hat{p}_{ji}$  holds.

Returning to Eq. [A.3], it can be expressed as:

$$\hat{p}_{ij} = 1 - \Phi[-(x_i - x_j)], \quad (\text{A.6})$$

from which:

$$x_i - x_j = -\Phi^{-1}(1 - \hat{p}_{ij}), \quad (\text{A.7})$$

It can be noticed that, if all experts express the same judgment, the model is no more viable:  $\hat{p}_{ij}$  values of 1.00 and 0.00 would correspond to  $-\Phi^{-1}(1 - \hat{p}_{ij})$  values of  $\pm\infty$ . A simplified approach for tackling this problem is to associate values of  $\hat{p}_{ij} \geq 0.977$  with  $-\Phi^{-1}(1 - 0.977) = 1.995$  and values of  $\hat{p}_{ij} \leq 0.023$  with  $-\Phi^{-1}(1 - 0.023) = -1.995$ . More sophisticated solutions to deal with this issue have been proposed (Edwards 1957).

Extending the reasoning to all possible paired comparisons for which  $m_{ij} \geq 1$  (i.e., for at least one expert, there is a usable paired-comparison relationship), the relevant  $\hat{p}_{ij}$  values can be determined, and the following system of equations can be constructed:

$$\begin{cases} & \vdots \\ x_i - x_j + \Phi^{-1}(1 - \hat{p}_{ij}) = 0 & \forall i, j : m_{ij} \geq 1 \\ & \vdots \end{cases} \quad (\text{A.8})$$

Since, the rank of the system is lower than the number ( $n$ ) of unknowns of the problem (i.e.,  $x_i \forall i$ ) – and the system itself would be indeterminate – the following conventional condition was introduced by Thurstone (1927):

$$\sum_i x_i = 0. \quad (\text{A.9})$$

Equations [A.8] and [A.9] are then aggregated into a new system, which is *over-determined* (i.e., it has rank  $n$  while the total number of equations ( $q$ ) is higher than  $n$ ) and *linear* with respect to the unknowns:

$$\begin{cases} & \vdots \\ x_i - x_j + \Phi^{-1}(1 - \hat{p}_{ij}) = 0 & \forall i, j : m_{ij} \geq 1 \\ & \vdots \\ \sum_i x_i = 0 & \end{cases} \quad (\text{A.10})$$

This system can be expressed in matrix form as:

$$\begin{cases} & \vdots \\ \sum_{k=1}^n (a_{hk} \cdot x_k) - b_h = 0 & \forall h \in [0, q] \Rightarrow \mathbf{A} \cdot \mathbf{X} - \mathbf{B} = 0, \\ & \vdots \end{cases} \quad (\text{A.11})$$

$\mathbf{X} = [\dots, x_i, \dots]^T \in R^{n \times 1}$  being the column vector containing the unknowns of the problem,  $a_{hk}$  being a generic element of matrix  $\mathbf{A} \in R^{q \times n}$ , and  $b_h$  being a generic element of vector  $\mathbf{B} \in R^{n \times 1}$ . For details on the construction of  $\mathbf{A}$  and  $\mathbf{B}$ , see (Gulliksen 1956).

The next subsection illustrates the proposed solution to the problem of interest.

### Initial scaling

In general, the system in Eq. [A.11] will not necessarily be complete, as the number of equations ( $q$ ) could be lower than  $C_2^n + 1$  (i.e., for any paired comparison with  $m_{ij} = 0$ , no equation can be formulated). In a recent article, Franceschini and Maisano (2019) proposed to solve this “potentially incomplete” system through the *Generalized Least Squares* (GLS) method (Karya and Kurata; Ross 2014). From a technical point of view, the GLS method allows to obtain a solution that minimizes the weighted sum of the squared residuals of the equations in Eq. [A.11], i.e.:

$$\sum_{h=1}^q w_h \cdot \left[ \sum_{k=1}^n (a_{hk} \cdot x_k) - b_h \right]^2, \quad (\text{A.12})$$

in which weights ( $w_h$ ) take into account the uncertainty in the  $\hat{p}_{ij}$  values. It can be demonstrated that, for a generic equation related to a generic paired comparison ( $f_i, f_j$ ):

$$w_h = \left[ \frac{\partial \Phi^{-1}(1 - \hat{p}_{ij})}{\partial \hat{p}_{ij}} \right]^2 / \sigma_{p_{ij}}^2 \quad (\text{A.13})$$

Next, weights are aggregated into a (squared) matrix  $\mathbf{W} \in R^{(q-1) \times (q-1)}$ , which encapsulates the uncertainty related to the equations of the system. A practical way to define  $\mathbf{W}$  is to apply the *Multivariate Law of Propagation of Uncertainty* (MLPU) to the system in Eq. [A.11], referring to the input variables affected by uncertainty (Kariya and Kurata 2004); these variables – which, focusing on the problem of interest, are essentially the  $\hat{p}_{ij}$  values,  $\forall i, j : m_{ij} \geq 1$  – can be collected in a column vector  $\xi = [\dots, \hat{p}_{ij}, \dots]^T \in R^{(q-1) \times 1}$ . Precisely,  $\mathbf{W}$  can be determined propagating the uncertainty of the elements in  $\xi$  to the equations of the system:

$$\mathbf{W} = \left[ \mathbf{J}_\xi \cdot \sum_\xi \mathbf{J}_\xi^T \right]^{-1}, \quad (\text{A.14})$$

where  $\mathbf{J}_\xi$  is the Jacobian matrix containing the partial derivatives of the first members of Eq. [A.11], with respect to the elements in  $\xi$ , and  $\Sigma_\xi$  is the covariance matrix of  $\xi$ .

By applying the GLS method to the system in Eq. [A.11], a final estimate of  $\mathbf{X}$  can be obtained as (Kariya and Kurata 2004):

$$\hat{\mathbf{X}} = (\mathbf{A}^T \cdot \mathbf{W} \cdot \mathbf{A})^{-1} \cdot \mathbf{A}^T \cdot \mathbf{W} \cdot \mathbf{B}. \quad (\text{A.15})$$

The uncertainty of the solution can be estimated through a covariance matrix  $\Sigma_{\mathbf{X}}$ , which can be obtained by propagating the uncertainty of input data (i.e.,  $\hat{p}_{ij}$  values), through the following relationship:

$$\sum_{\mathbf{X}} = (\mathbf{A}^T \cdot \mathbf{W} \cdot \mathbf{A})^{-1} \quad (\text{A.16})$$

On the other hand, the partial derivatives in the Jacobian matrix  $\mathbf{J}_\xi \in R^{(q-1) \times (q-1)}$  can be determined in a closed form, by approximating terms  $\Phi^{-1}(1 - \hat{p}_{ij})$  (see Eq. [A.10]) through the following formula (Aludaat and Alodat 2008):

$$\Phi^{-1}(1 - \hat{p}_{ij}) \approx k \sqrt{\frac{-\ln[1 - (1 - 2 \cdot \hat{p}_{ij})^2]}{\sqrt{\pi/8}}} \quad (\text{A.17})$$

$$\begin{cases} 0 \leq \hat{p}_{ij} \leq 0.5 \rightarrow k = 1 \\ 0.5 < \hat{p}_{ij} \leq 1 \rightarrow k = -1, \end{cases}$$

from which:

$$\begin{aligned} & \frac{\partial [\Phi^{-1}(1 - \hat{p}_{ij})]}{\partial \hat{p}_{ij}} \\ & \approx \left| \frac{\sqrt{2} \cdot (2 \cdot \hat{p}_{ij} - 1)}{\sqrt{-2 \cdot \sqrt{2 \cdot \pi} \cdot \ln(-4 \cdot \hat{p}_{ij}^2 + 4 \cdot \hat{p}_{ij})} \cdot \hat{p}_{ij} \cdot (1 - \hat{p}_{ij})} \right| \text{ for } \hat{p}_{ij} \neq 0.5 \\ & \frac{\partial [\Phi^{-1}(1 - \hat{p}_{ij})]}{\partial \hat{p}_{ij}} \approx 2.506628 \quad \text{ for } \hat{p}_{ij} = 0.5. \end{aligned} \quad (\text{A.18})$$

The matrix  $\Sigma_\xi \in R^{(q-1) \times (q-1)}$  diagonally contains the variances related to the input variables, i.e.  $\hat{p}_{ij}$  terms. Let us now make a brief digression to derive the expression of these variances. Since  $f_{ij}$  is determined considering a sample of  $m_{ij}$  paired comparisons, it will be distributed binomially;  $\hat{p}_{ij}$  is the best estimator of  $p_{ij}$ , according to the information available. In formal terms:

$$f_{ij} \sim B[\mu_{f_{ij}}, \sigma_{f_{ij}}^2] \sim B[m_{ij} \cdot \hat{p}_{ij}, m_{ij} \cdot \hat{p}_{ij} \cdot (1 - \hat{p}_{ij})]. \quad (\text{A.19})$$

In the hypothesis that  $m_{ij} \cdot \hat{p}_{ij} \geq 5$  when  $0 \leq \hat{p}_{ij} \leq 0.5$ , or  $m_{ij} \cdot (1 - \hat{p}_{ij}) \geq 5$  when  $0.5 < \hat{p}_{ij} \leq 1$ , the following approximations can be reasonably introduced (Ross 2014):

$$\begin{aligned} f_{ij} &\sim N[\mu_{f_{ij}}, \sigma_{f_{ij}}^2] \sim N[m_{ij} \cdot \hat{p}_{ij}, m_{ij} \cdot \hat{p}_{ij} \cdot (1 - \hat{p}_{ij})] \\ p_{ij} &\sim N[\mu_{p_{ij}}, \sigma_{p_{ij}}^2] \sim N\left[\hat{p}_{ij}, \frac{\hat{p}_{ij} \cdot (1 - \hat{p}_{ij})}{m_{ij}}\right]. \end{aligned} \quad (\text{A.20})$$

It can be noticed that, even when all experts express their usable judgments for all the possible paired comparisons (i.e.,  $m_{ij} = m \forall i, j$ ), the variance of  $p_{ij}$  may change from one paired comparison to one other, as it also depends on the relevant  $\hat{p}_{ij}$  value.

The variances of the  $\hat{p}_{ij}$  values will therefore be:

$$\sigma_{p_{ij}}^2 = \frac{\hat{p}_{ij} \cdot (1 - \hat{p}_{ij})}{m_{ij}}. \quad (\text{A.21})$$

The relevant covariances can be neglected, upon the reasonable assumption that the estimates of different  $p_{ij}$  values are (statistically) independent from each other. Next, it is possible to determine the matrix  $\mathbf{W}$  (Eq. [A.14]) and, subsequently,  $\hat{\mathbf{X}}$  (Eq. [A.15]) with the relevant uncertainty (Eq. [A.16]). This solution is defined on an *interval* scale ( $x$ ), i.e. objects are defined on a scale with meaningful distance but arbitrary zero point (Thurstone 1927; Roberts 1979; Franceschini et al. 2019). The following subsection introduces a transformation that allows to “promote” this scaling to a more powerful one.

### Transformation of the initial scaling into the final one

Through the following transformation, the resulting scaling ( $x$ ) is transformed into a new one ( $y$ ), which is defined in the conventional range  $[0, 10]$ :

$$\hat{y}_i = \hat{y}_i(\hat{\mathbf{X}}) = 10 \cdot \frac{\hat{x}_i - \hat{x}_Z}{\hat{x}_M - \hat{x}_Z} \forall i, \quad (\text{A.22})$$

where:  $\hat{x}_Z$  and  $\hat{x}_M$  are the scale values of  $f_Z$  and  $f_M$ , resulting from the GLS application;  $\hat{x}_i$  is the scale value of a generic  $i$ -th object (regular or dummy), resulting from the GLS application;  $\hat{y}_i$  is the scale value of a generic  $i$ -th object in the new scale  $y$ . This transformation can also be expressed in vector form as:

$$\hat{\mathbf{Y}} = \hat{\mathbf{Y}}(\hat{\mathbf{X}}) = [..., \hat{y}_i(\hat{\mathbf{X}}), ...]^T = \left[ ..., 10 \cdot \frac{\hat{x}_i - \hat{x}_Z}{\hat{x}_M - \hat{x}_Z}, ... \right]^T, \quad (\text{A.23})$$

being  $\mathbf{Y}$  a column vector whose components result from a system of  $n$  decoupled equations. Since scale  $y$  “inherits” the *interval* property from scale  $x$  and has a conventional zero point that corresponds to the absence of the attribute (i.e.,  $\hat{y}_Z$ ), it can be reasonably considered as a *ratio* scale, without any conceptually prohibited “promotion”. We note that the two dummy objects,  $f_Z$  and  $f_M$ , are used to “anchor” the  $x$  scale to the  $y$  scale (Paruolo, Saisana and Saltelli 2013).

Combining Eqs. [A.23] and [A.15], the final (ratio) scaling  $\mathbf{Y}$  can be also expressed as:

$$\hat{\mathbf{Y}} = \hat{\mathbf{Y}}(\hat{\mathbf{X}}) = \hat{\mathbf{Y}}[(\mathbf{A}^T \cdot \mathbf{W} \cdot \mathbf{A})^{-1} \cdot \mathbf{A}^T \cdot \mathbf{W} \cdot \mathbf{B}]. \quad (\text{A.24})$$

Next, the uncertainty related to the elements in  $\hat{\mathbf{Y}} = [..., \hat{y}_i, ...]^T \in R^{n \times 1}$  can be determined by applying the *delta method* to Eq. [A.24] (JCGM100:2008 2008). It is thus obtained:

$$\Sigma_{\mathbf{Y}} = \mathbf{J}_{\mathbf{Y}(\hat{\mathbf{X}})} \cdot \Sigma_{\mathbf{X}} \cdot \mathbf{J}_{\mathbf{Y}(\hat{\mathbf{X}})}^T, \quad (\text{A.25})$$

where  $\mathbf{J}_{\mathbf{Y}(\hat{\mathbf{X}})} \in R^{n \times n}$  is a Jacobian matrix containing the partial derivatives related to the equations of the system in Eq. [A.23], with respect to the elements of  $\mathbf{X}$ . In the hypothesis that the  $n$  (regular and dummy) objects are ordered as  $(f_Z, f_M, f_1, f_2, f_3, \dots)$  and therefore  $\hat{\mathbf{X}} = [\hat{x}_Z, \hat{x}_M, \hat{x}_1, \hat{x}_2, \hat{x}_3, \dots]^T$  and  $\hat{\mathbf{Y}} = [\hat{y}_Z, \hat{y}_M, \hat{y}_1, \hat{y}_2, \hat{y}_3, \dots]^T$ ,  $\mathbf{J}_{\mathbf{Y}(\hat{\mathbf{X}})}$  would be:

$$\begin{aligned} \mathbf{J}_{\mathbf{Y}(\hat{\mathbf{X}})} &= \begin{bmatrix} \frac{\partial y_Z}{\partial x_Z} \frac{\partial y_Z}{\partial x_M} \frac{\partial y_Z}{\partial x_1} \dots \frac{\partial y_Z}{\partial x_i} \dots \\ \frac{\partial y_M}{\partial x_Z} \frac{\partial y_M}{\partial x_M} \frac{\partial y_M}{\partial x_1} \dots \frac{\partial y_M}{\partial x_i} \dots \\ \frac{\partial y_1}{\partial x_Z} \frac{\partial y_1}{\partial x_M} \frac{\partial y_1}{\partial x_1} \dots \frac{\partial y_1}{\partial x_i} \dots \\ \vdots \quad \vdots \quad \vdots \quad \ddots \quad \vdots \quad \vdots \\ \frac{\partial y_i}{\partial x_Z} \frac{\partial y_i}{\partial x_M} \frac{\partial y_i}{\partial x_1} \dots \frac{\partial y_i}{\partial x_i} \dots \\ \vdots \quad \vdots \quad \vdots \quad \dots \quad \vdots \quad \ddots \end{bmatrix} \\ &= \begin{bmatrix} \frac{10}{\hat{x}_M - \hat{x}_Z} & 0 & 0 & \dots & 0 & \dots \\ 0 & \frac{-10}{\hat{x}_M - \hat{x}_Z} & 0 & \dots & 0 & \dots \\ -10 \cdot \frac{(\hat{x}_M - \hat{x}_1)}{(\hat{x}_Z - \hat{x}_M)^2} & 10 \cdot \frac{\hat{x}_Z - \hat{x}_1}{(\hat{x}_M - \hat{x}_Z)^2} & \frac{-10}{\hat{x}_M - \hat{x}_Z} & \dots & 0 & \dots \\ \vdots & \vdots & \vdots & \ddots & \vdots & \vdots \\ -10 \cdot \frac{(\hat{x}_M - \hat{x}_i)}{(\hat{x}_Z - \hat{x}_M)^2} & 10 \cdot \frac{\hat{x}_Z - \hat{x}_i}{(\hat{x}_M - \hat{x}_Z)^2} & 0 & \dots & \frac{-10}{\hat{x}_M - \hat{x}_Z} & \dots \\ \vdots & \vdots & \vdots & \dots & \vdots & \ddots \end{bmatrix}. \end{aligned} \quad (\text{A.26})$$

Combining Eqs. [A.25] and [A.16],  $\Sigma_{\mathbf{Y}}$  can be expressed as:

$$\Sigma_{\mathbf{Y}} = \mathbf{J}_{\mathbf{Y}(\hat{\mathbf{X}})} \cdot [(\mathbf{A}^T \cdot \mathbf{W} \cdot \mathbf{A})^{-1}] \cdot \mathbf{J}_{\mathbf{Y}(\hat{\mathbf{X}})}^T. \quad (\text{A.27})$$

Assuming that the  $p_{ij}$  and  $\hat{y}_i$  values are approximately normally distributed, a 95% confidence interval related to each  $\hat{y}_i$  value can be computed as:

$$\hat{y}_i \pm U_{y_i} = \hat{y}_i \pm 2 \cdot \sigma_{y_i} \forall i. \quad (\text{A.28})$$

$U_{y_i}$  being the so-called *expanded uncertainty* of  $\hat{y}_i$  with a coverage factor  $k=2$  and  $\sigma_{y_i} = \sqrt{\Sigma_{\mathbf{Y},(i,i)}}$  (JCGM 100:2008 2008).

### Weighted additive aggregation model

The fact that the values of  $S_i$ ,  $O_i$  and  $D_i$ , are defined on three separate ratio scales entails that their aggregation through the multiplicative model in Eq. [3] is meaningful (Roberts 1979; Franceschini et al. 2019). Although we are

aware of the presumed advantages of multiplicative models with respect to the additive ones, below we propose an alternative weighted additive model:

$$RPN'_i = w_S \cdot S_i + w_O \cdot O_i + w_D \cdot D_i, \quad (\text{A.29})$$

in which:  $w_S$ ,  $w_O$  and  $w_D$  are the percentage weights assigned to the three risk factors of interest (conventionally  $w_S + w_O + w_D = 100\%$ ) and  $RPN'_i$  is the resulting composite indicator; the prime symbol “(‘)” was introduced to distinguish this composite indicator from the one in Eq. [3]. Additionally, while  $RPN_i \in [0, 1000]$ ,  $RPN'_i \in [0, 10]$ .

The model in Eq. [A.29] can be preferred to the one in Eq. [3], for the following reasons:

- It allows the P-FMEA team leader to choose the (strategy) weights ( $w_S$ ,  $w_O$  and  $w_D$ ) of the three risk factors of interest. For example, for manufacturing processes that are potentially hazardous to personnel safety, it may be appropriate to raise  $w_S$ . On the other hand, for processes with high throughput and high level of automation, it may be appropriate (i) to raise  $w_O$ , with the purpose of reducing the so-called *mean time between failures* (MTBF), and/or (ii) to raise  $w_D$ , with the purpose of reducing the so-called *mean time to failure* (MTTF) (O'Connor and Kleyner 2012). Of course, the choice of weights should be made according to the strategic objectives of the process. The scientific literature contains a variety of techniques to drive this operation (Vora, Paunwala, and Paunwala 2014; Wang, Liang and Qian 2015).<sup>39</sup> The comparability between  $S_i$ ,  $O_i$ , and  $D_i$  is ensured by the fact that these indicators are defined on ratio scales with comparable zero and a conventional range [0, 10].
- Although weights could theoretically be introduced into the multiplicative model in Eq. [3], e.g. by changing it into:

$$RPN''_i = (S_i)^{w_S} \cdot (O_i)^{w_O} \cdot (D_i)^{w_D}, \quad (\text{A.30})$$

we think that it would be relatively difficult to control their influence on the final result. For example, the use of multiplicative models (weighted or not) could

make the *substitution rate* of sub-indicators change unpredictably (Franceschini et al. 2019).

- The model in Eq. [A.29] allows to visualize the contributions of the three risk factors of interest. For example the chart in Figure A1 shows the  $RPN'_i$  values and relevant contributions for the case study. In this case, the P-FMEA team leader set the following weight combination:  $w_S = 40\%$ ,  $w_O = 30\%$  and  $w_D = 30\%$ .

Similar to what explained in the section “Uncertainty calculation” for the  $RPN_i$  values, the uncertainty related to the  $RPN'_i$  values can be determined by applying the *delta method* to Eq. [A.29] (JCGM 100:2008 2008), obtaining:

$$\sigma_{RPN'_i} = \sqrt{w_S^2 \cdot \sigma_{S_i}^2 + w_O^2 \cdot \sigma_{O_i}^2 + w_D^2 \cdot \sigma_{D_i}^2}. \quad (\text{A.31})$$

Weights ( $w_S$ ,  $w_O$  and  $w_D$ ) are implicitly treated as constants, neglecting the correlations between the  $S_i$ ,  $O_i$  and  $D_i$  values.

Assuming that the  $RPN'_i$  values are approximately normally distributed, a 95% confidence interval related to each  $RPN'_i$  value can be computed as:


$$RPN'_i \pm U_{RPN'_i} = RPN'_i \pm 2 \cdot \sigma_{RPN'_i} \quad (\text{A.32})$$

$U_{RPN'_i}$  being the so-called *expanded uncertainty* (JCGM 100:2008 2008) of  $RPN'_i$  with a coverage factor  $k=2$ .

Table A1 contain the results concerned with the case study.

Again, we note that the uncertainty bands of several failure modes are superimposed (see Figure A1). Despite the structural differences between the model in Eq. [A.29] and that in Eq. [3], the corresponding results are not so dissimilar: the most critical failure modes are  $f_5$  and  $f_8$ , while the least critical ones are  $f_7$  and  $f_{11}$ . Unlike the model in Eq. [3], we note that the dispersion of the  $RPN'_i$  values is rather homogeneous (i.e., the standard deviations are comparable), indicating a certain *homoschedasticity* (Ross 2014) (see Figure A1).

Returning to the model in Eq. [A.29], we emphasize that the choice of weights ( $w_S$ ,  $w_O$  and  $w_D$ ) is arbitrary. In such

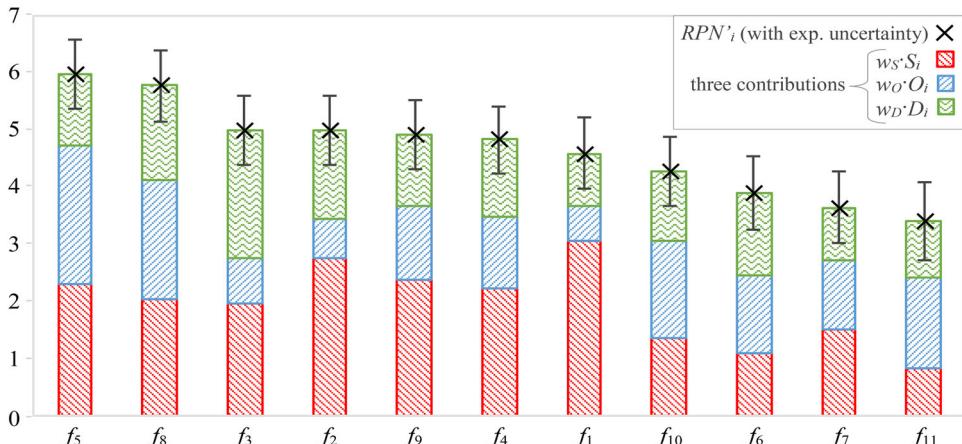


**Figure A1.** Pareto chart of the failure modes based on their  $RPN'_i$  values (see Eq. [A.29]). In addition to expanded-uncertainty bands, this chart allows to visualize the contributions related to  $S_i$ ,  $O_i$  and  $D_i$  (numerical data in Table A1).

**Table A1.** Results of the application of the weighted additive model of Eq. [A.29] to the case study.

	$S_i$ values		$O_i$ values		$D_i$ values		Additive contributions			$RPN'_i$ values		
	Mean	St.dev.	Mean	St.dev.	Mean	St.dev.	$w_S S_i$	$w_O O_i$	$w_D D_i$	Mean	St.dev.	$U_{RPN'_i}$
$f_1$	7.69	0.51	2.03	0.60	3.01	0.55	2.32	2.42	1.24	5.98	0.31	0.62
$f_2$	6.91	0.51	2.23	0.58	5.19	0.51	2.03	2.08	1.66	5.77	0.31	0.62
$f_3$	4.88	0.52	2.69	0.55	7.46	0.55	1.95	0.81	2.24	5.00	0.31	0.62
$f_4$	5.60	0.53	4.14	0.51	4.48	0.52	2.76	0.67	1.56	4.99	0.31	0.62
$f_5$	5.80	0.52	8.06	0.56	4.14	0.54	2.38	1.28	1.27	4.93	0.31	0.62
$f_6$	2.71	0.61	4.57	0.52	4.82	0.51	2.24	1.24	1.34	4.83	0.30	0.60
$f_7$	3.76	0.54	4.05	0.54	3.05	0.56	3.08	0.61	0.90	4.59	0.32	0.64
$f_8$	5.08	0.54	6.93	0.56	5.54	0.52	1.34	1.72	1.21	4.27	0.31	0.62
$f_9$	5.96	0.52	4.26	0.54	4.23	0.51	1.08	1.37	1.44	3.90	0.33	0.66
$f_{10}$	3.36	0.55	5.74	0.52	4.03	0.53	1.51	1.21	0.91	3.63	0.32	0.64
$f_{11}$	2.09	0.66	5.27	0.52	3.29	0.55	0.84	1.58	0.99	3.41	0.35	0.70

In case, weights are conventionally set to  $w_S = 40\%$ ,  $w_O = 30\%$ , and  $w_D = 30\%$ .

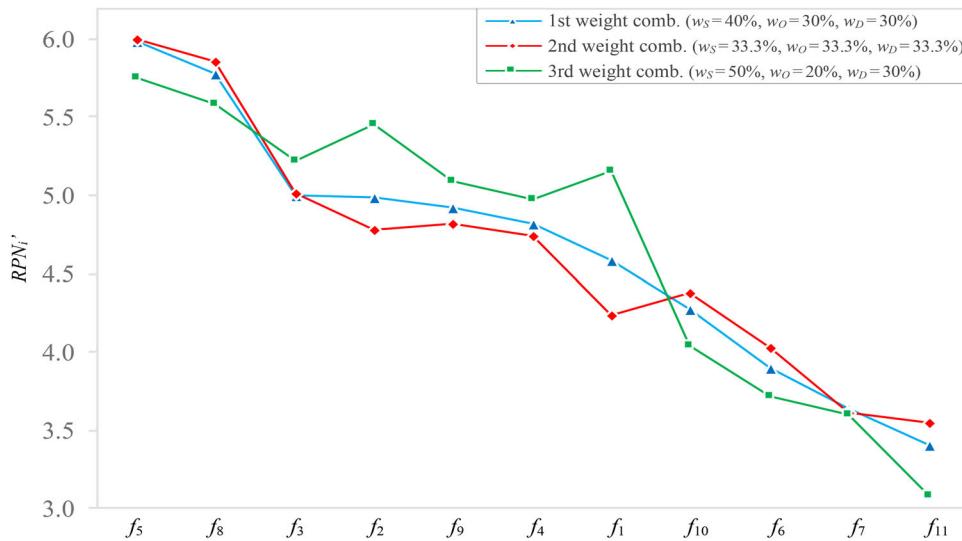

**Figure A2.** Sensitivity analysis of possible variations in results for three different weight combinations. Failure modes are sorted in descending order with respect to the corresponding  $RPN'_i$  values, for the first weight combination.

a scenario, it may be appropriate to evaluate the robustness of the results with respect to (small) variations in these weights, through a *sensitivity analysis*. For example, the possible variations in the case-study results can be analyzed for three different weight combinations, as shown in Figure A1: (1)  $w_S = 40\%$ ,  $w_O = 30\%$  and  $w_D = 30\%$ , (2)  $w_S = 33.3\%$ ,

$w_O = 33.3\%$  and  $w_D = 33.3\%$ , and (3)  $w_S = 50\%$ ,  $w_O = 20\%$  and  $w_D = 30\%$ .

Since the  $RPN'_i$  values of the failure modes do not seem to change considerably as the weights vary, the solution provided by the (weighted) additive model in Eq. [A.29] appears robust for this case study.