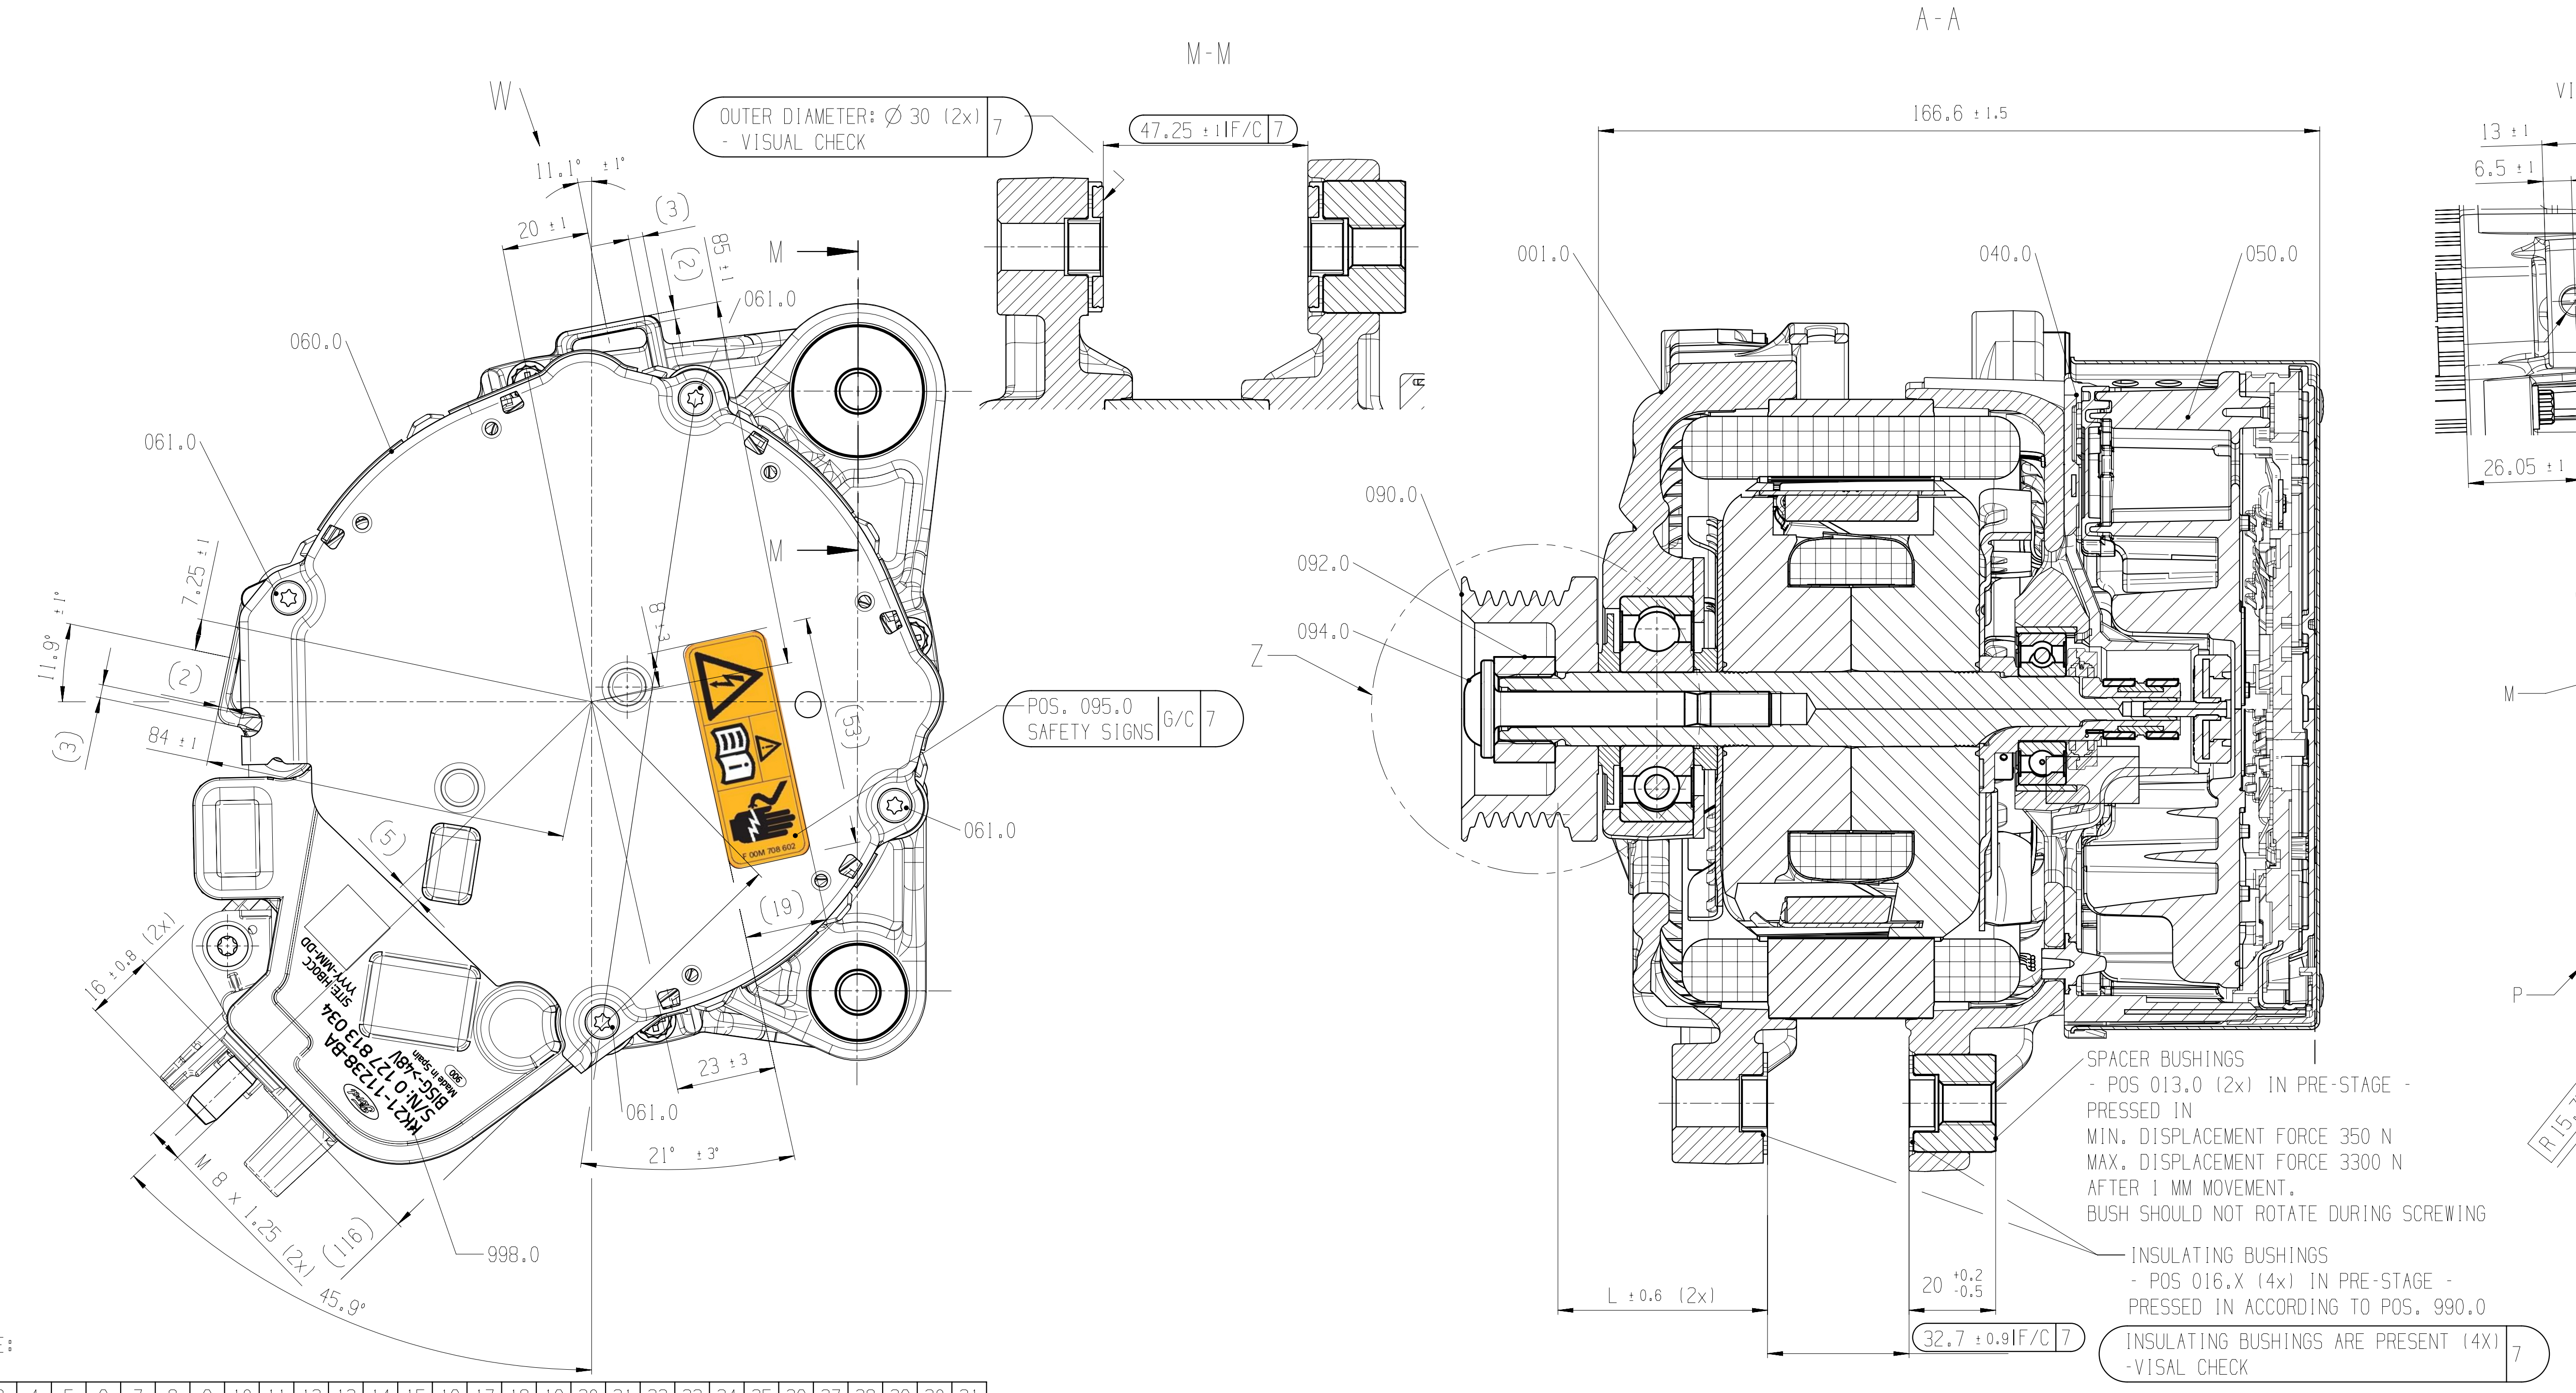

SPACER BUSHINGS
- POS 013.0 (2x) IN PRE-STAGE -
PRESSED IN
MIN. DISPLACEMENT FORCE 350 N
MAX. DISPLACEMENT FORCE 3300 N
AFTER 1 MM MOVEMENT.
BUSH SHOULD NOT ROTATE DURING SCREWING

INSULATING BUSHINGS
- POS 016.X (4x) IN PRE-STAGE -
PRESSED IN ACCORDING TO POS. 990.0

INSULATING BUSHINGS ARE PRESENT (4X) -VISAL CHECK 7

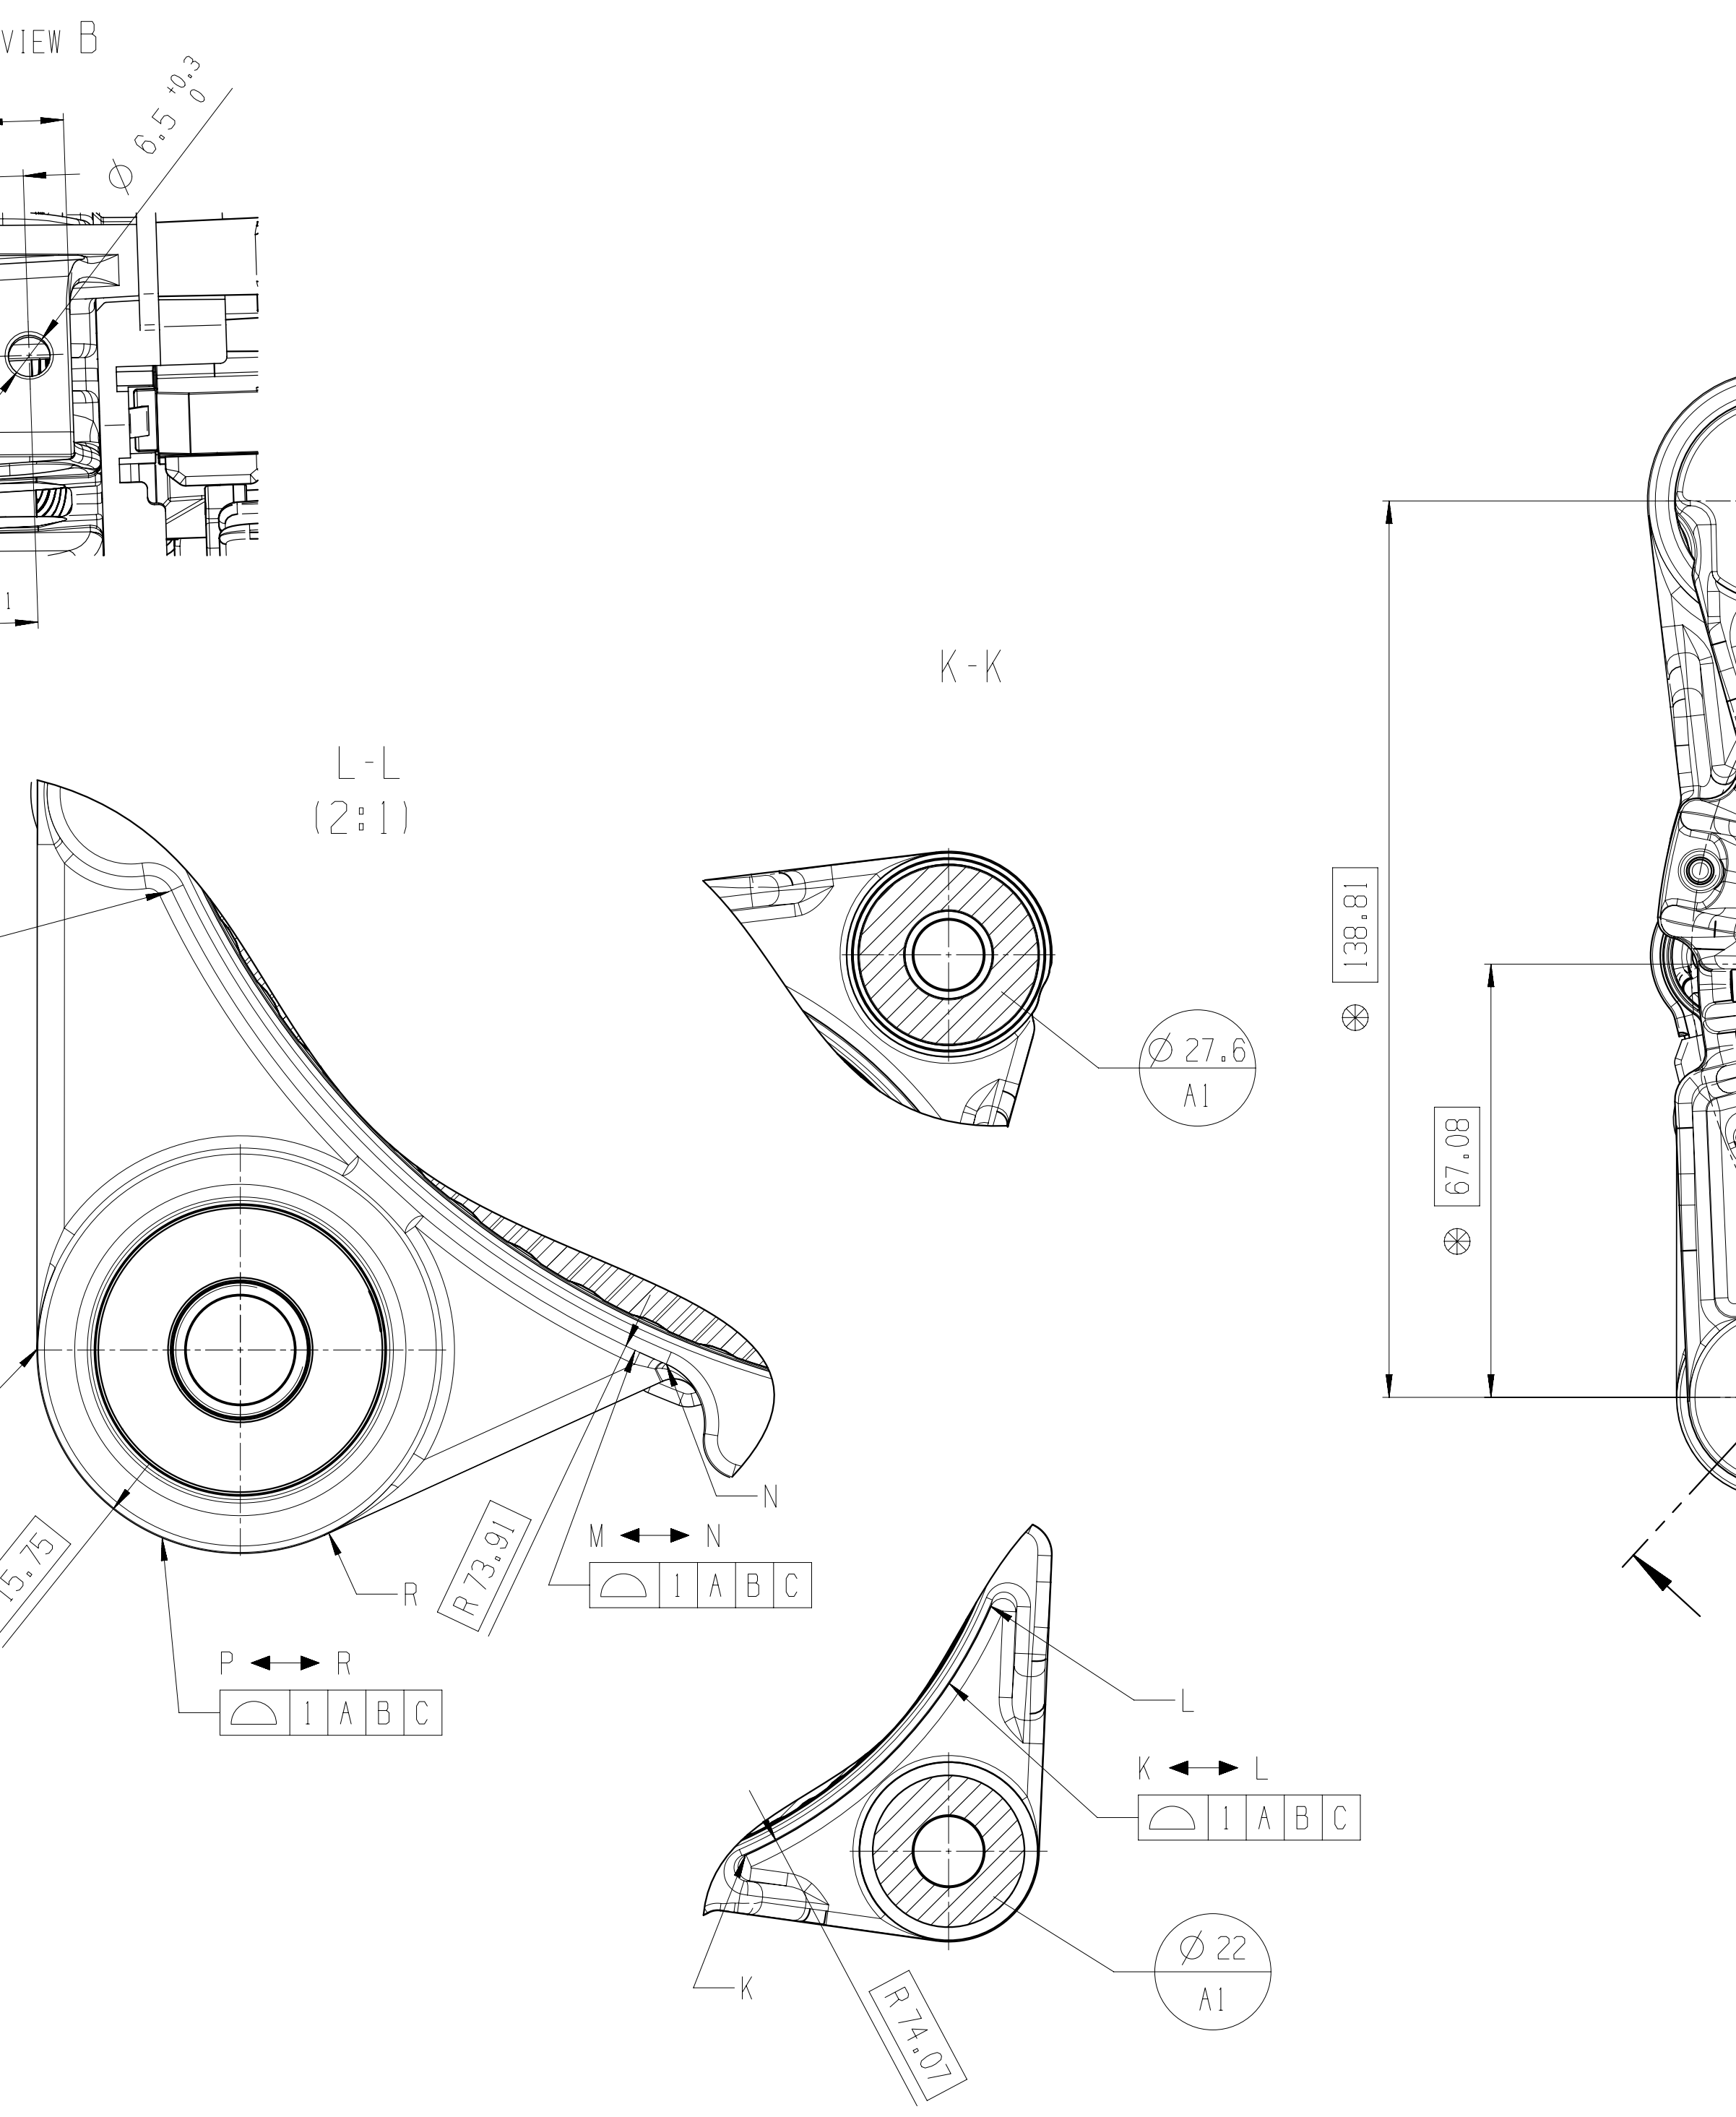

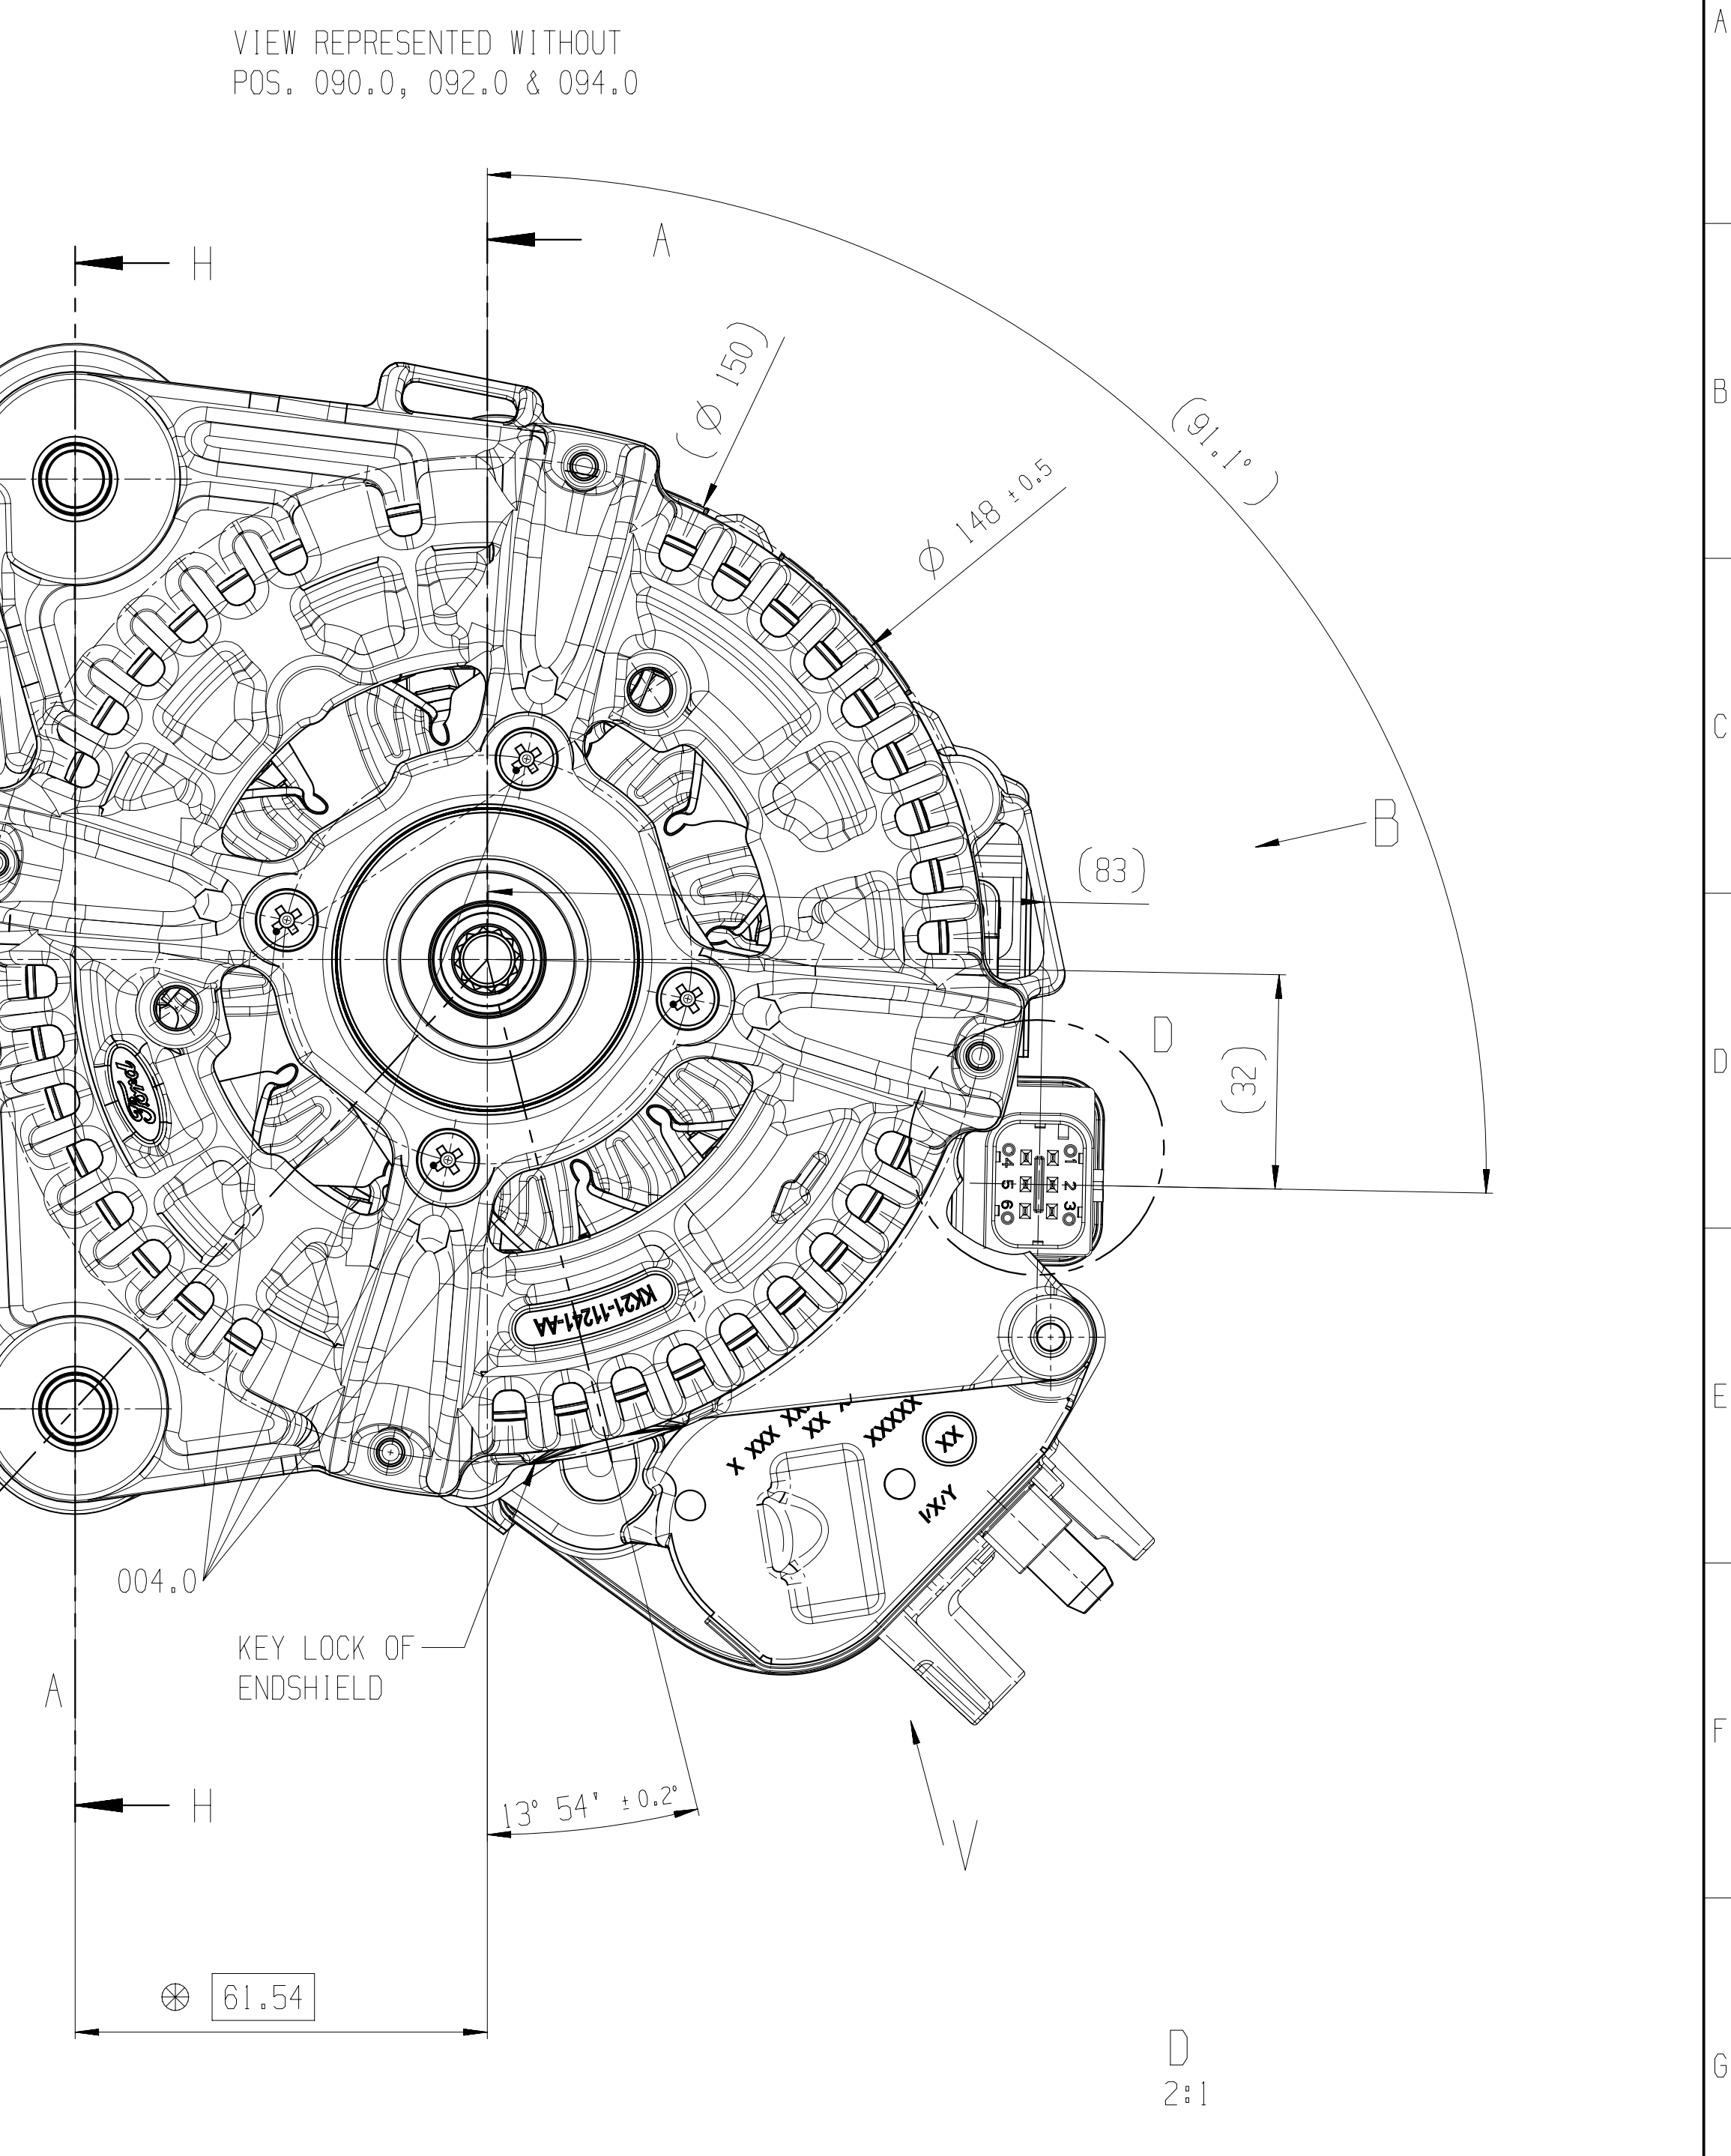

VIEW REPRESENTED WITHOUT POS. 090.0, 092.0 & 094.0

NOTE 1*

DATA MATRIX CODE:

DIGIT	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
CONTENT	H	B	0	C	C	Y	Y	D	D	D	H	H	M	M	S	S	K	K	2	1	-	1	1	2	3	8	-	B	A	L	L

OEM/OES DATA MATRIX CODE (FOR RBET):
HB0CC : FIELD 5
YY : YEAR TWO DIGITS
DDD : PRODUCTION DAY CONTINUOUS THREE DIGITS RESET BEGIN OF YEAR
HH : HOUR
MM : MINUTE
SS : SECOND
KK21 : FORD PARTNUMBER 1-4 DIGITS
- : BLANK CHARACTER
11238 : FORD PARTNUMBER 5-9 DIGITS
- : BLANK CHARACTER
BA : FORD PARTNUMBER 10-11 DIGITS
LL : PRODUCTION LINE (LINE LVL:01 ; HVL:02)
- : BLANK CHARACTER
CODEC INFORMATION:
HB0CCYYDDDHHMMSSKK21 11238 BALL

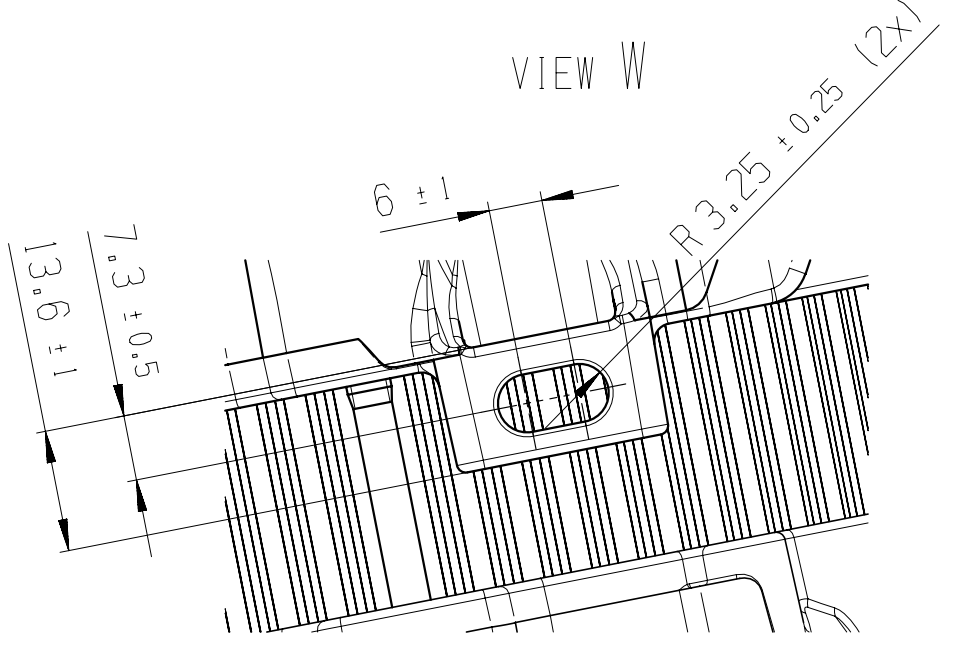

VIEW REPRESENTED WITHOUT POS. 060.0 & 061.0

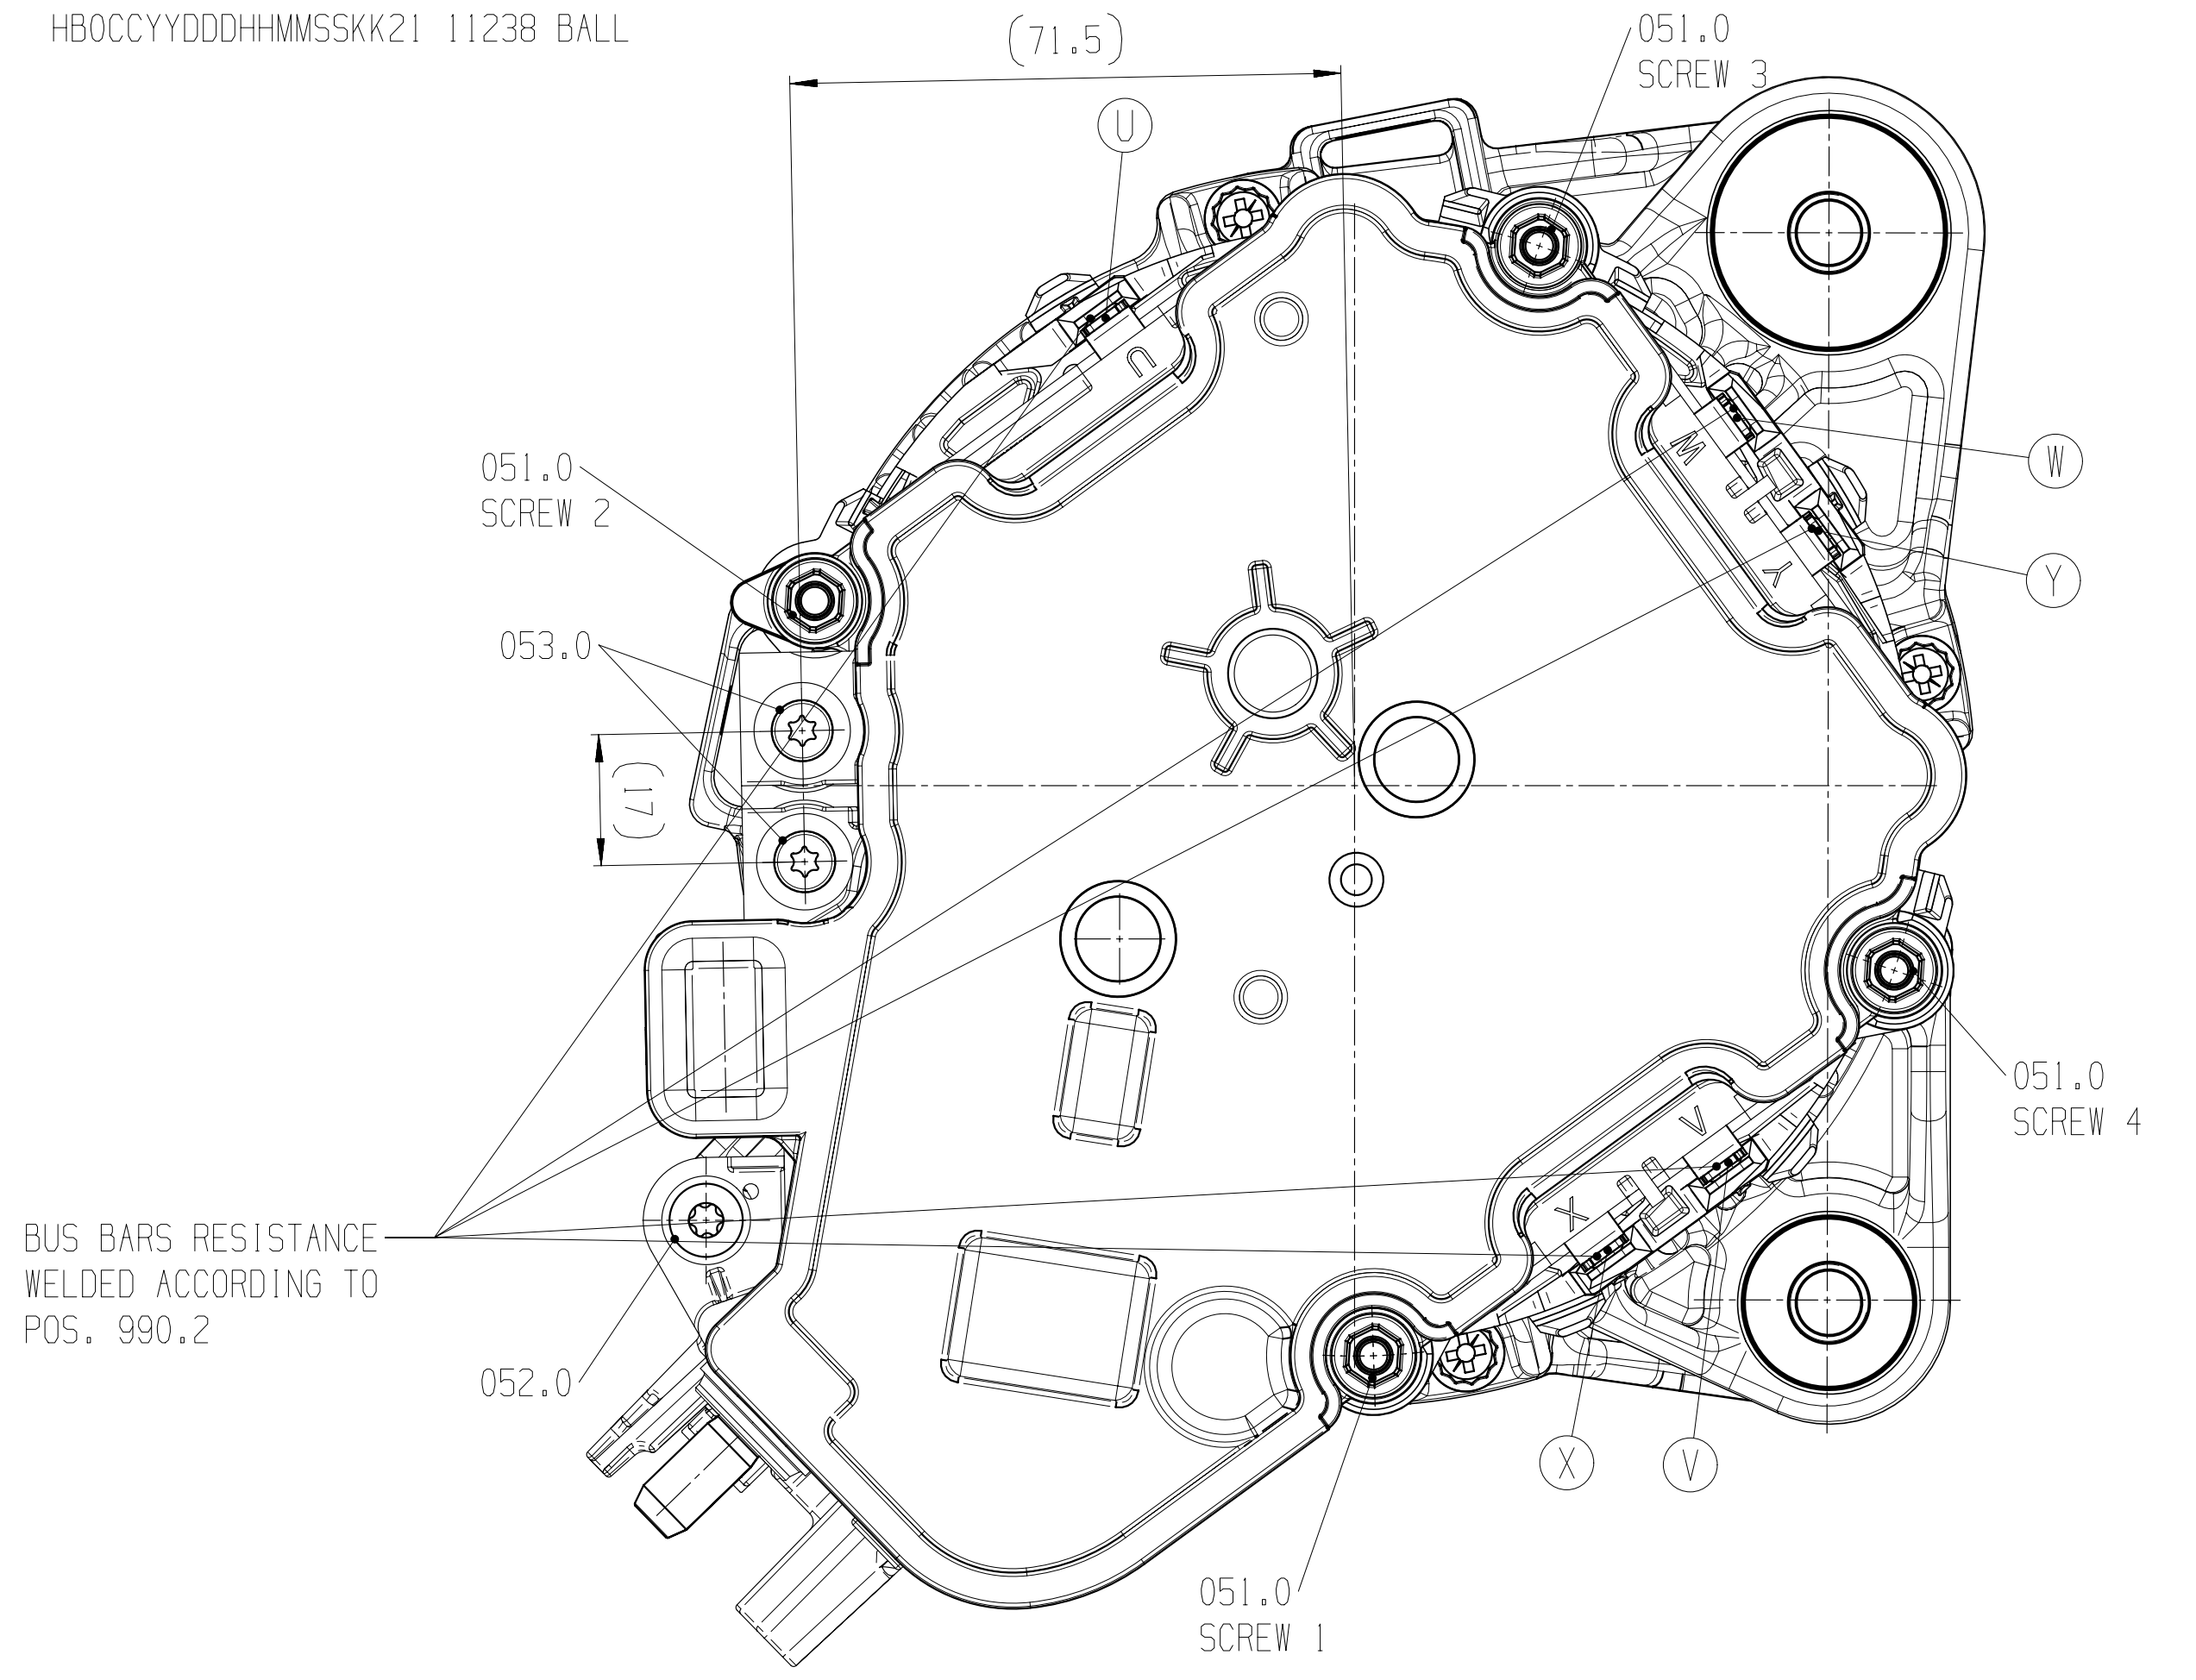

VIEW REPRESENTED WITHOUT POS. 050.0 TO 061.0

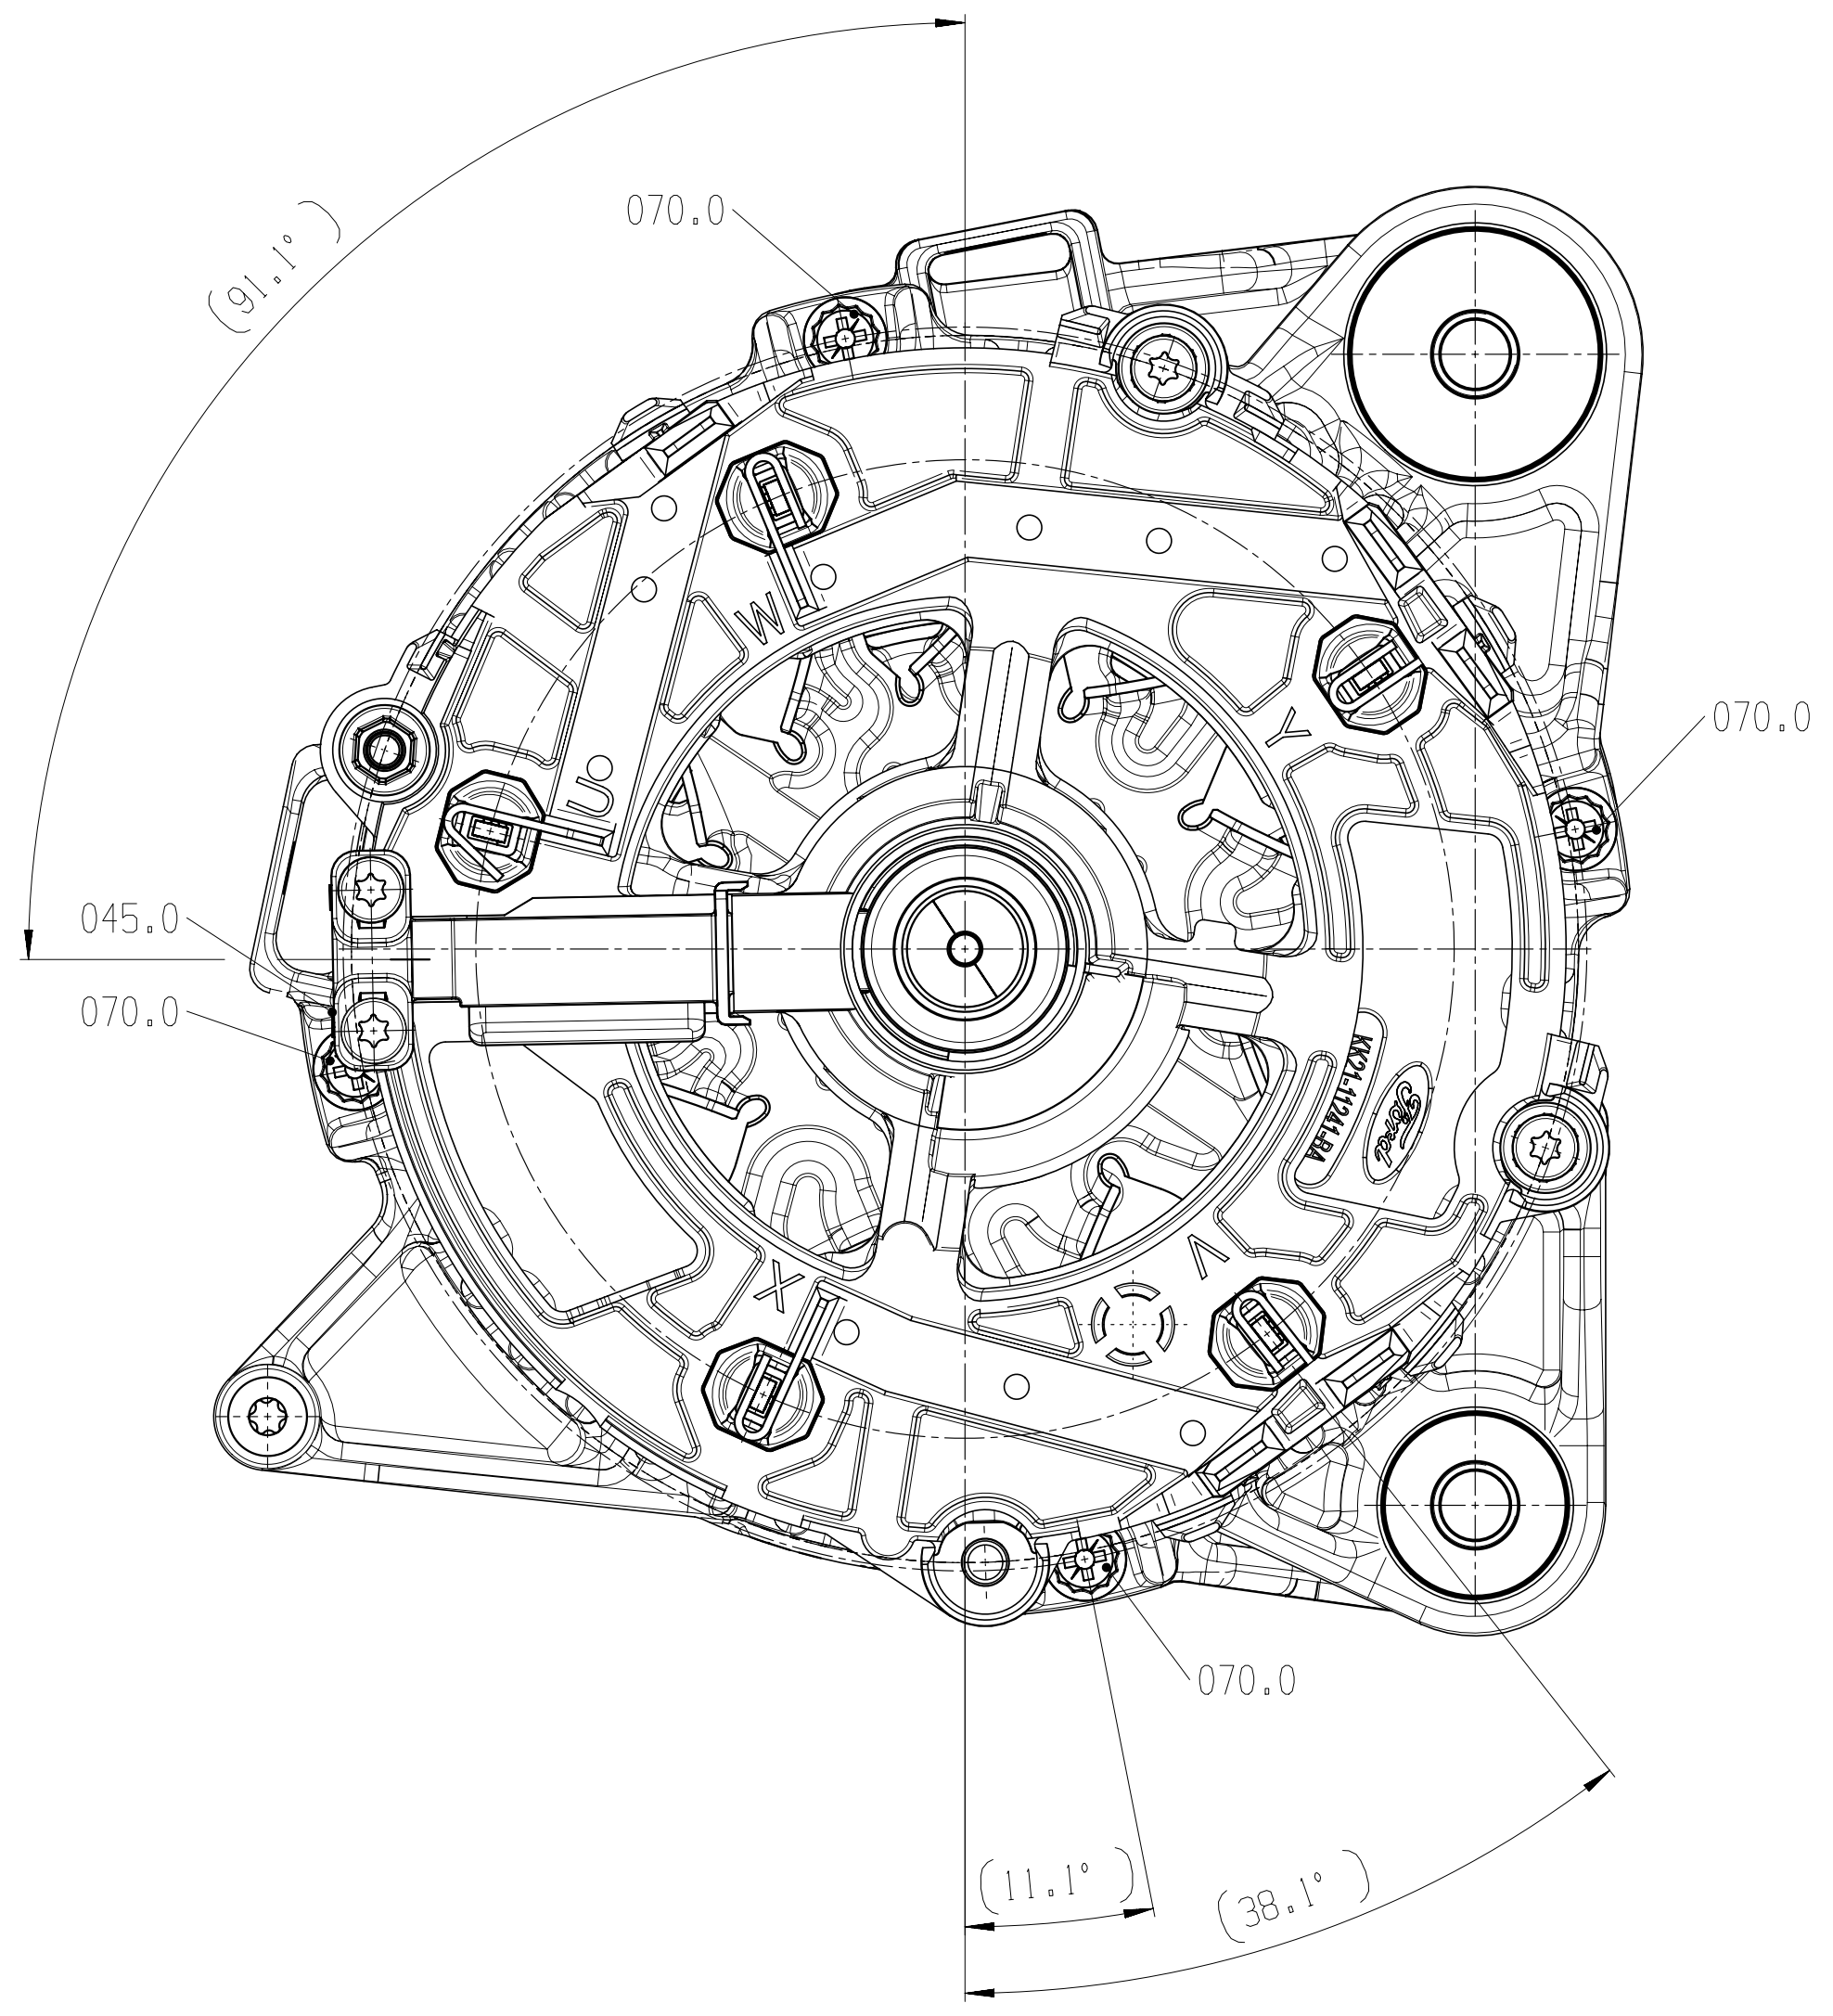

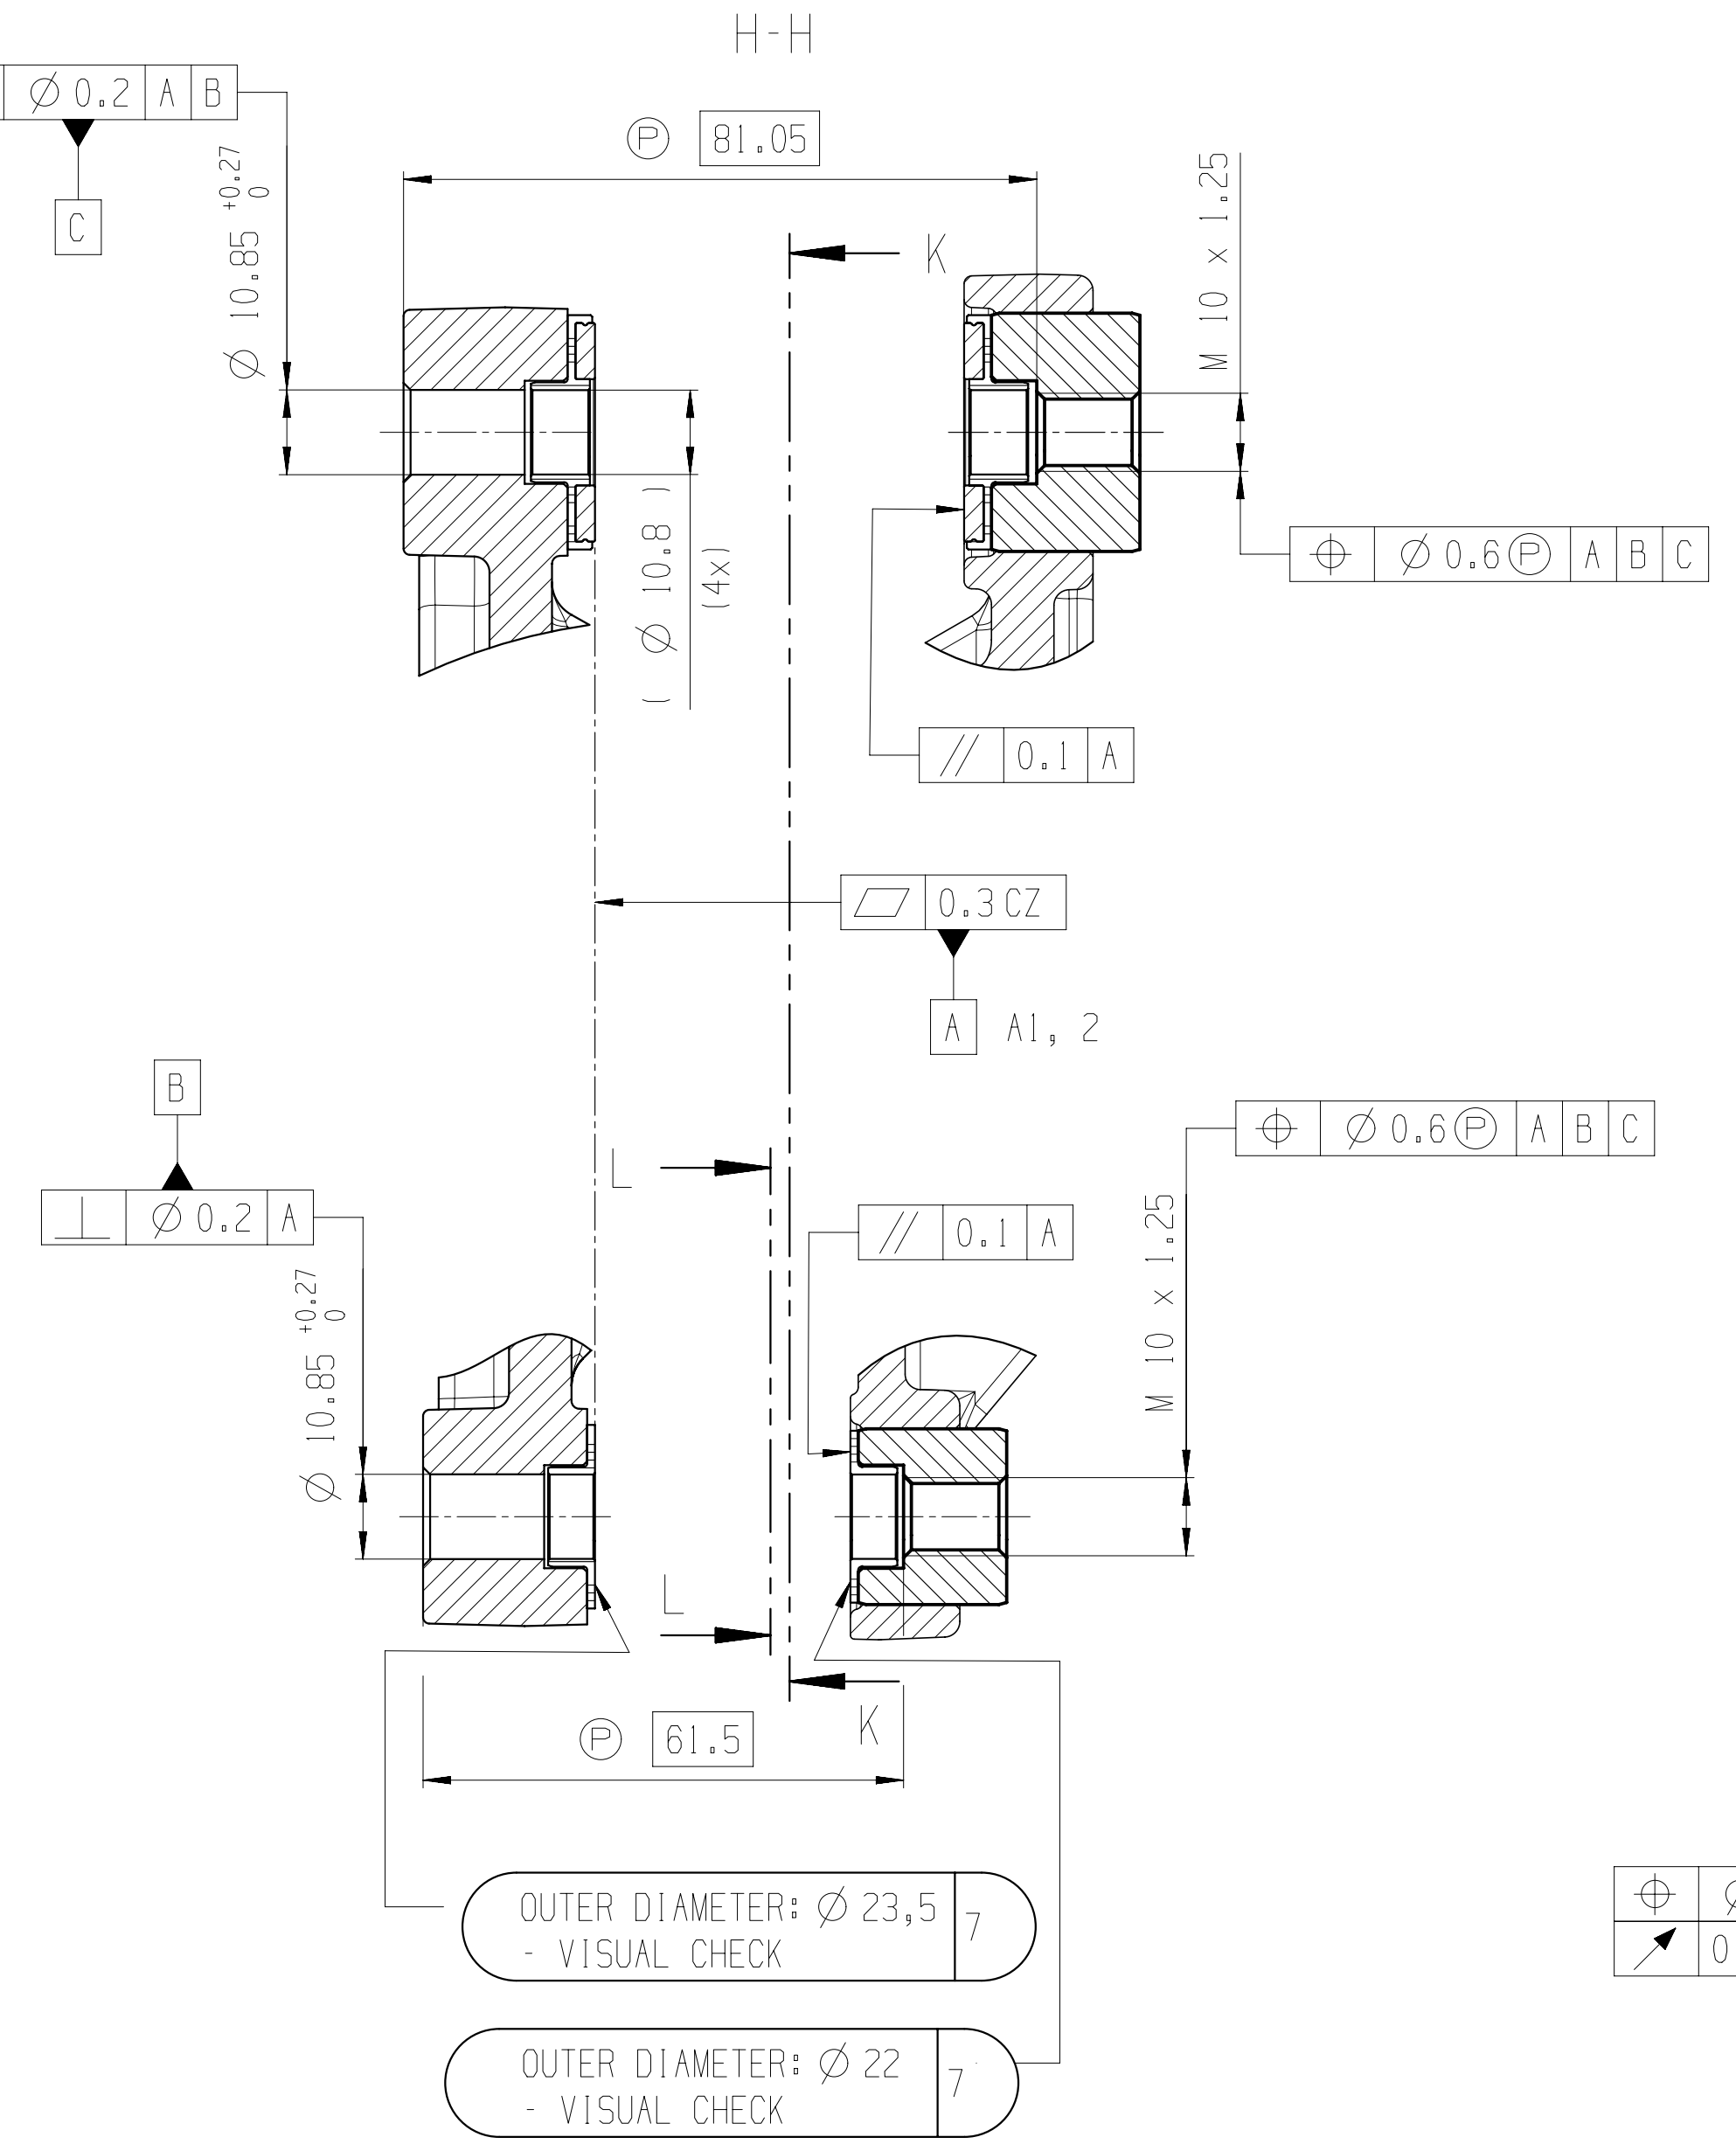

OUTER DIAMETER: Ø 23.5 - VISUAL CHECK 7

OUTER DIAMETER: Ø 22 - VISUAL CHECK 7

VIEW REPRESENTED WITHOUT A END SHIELD

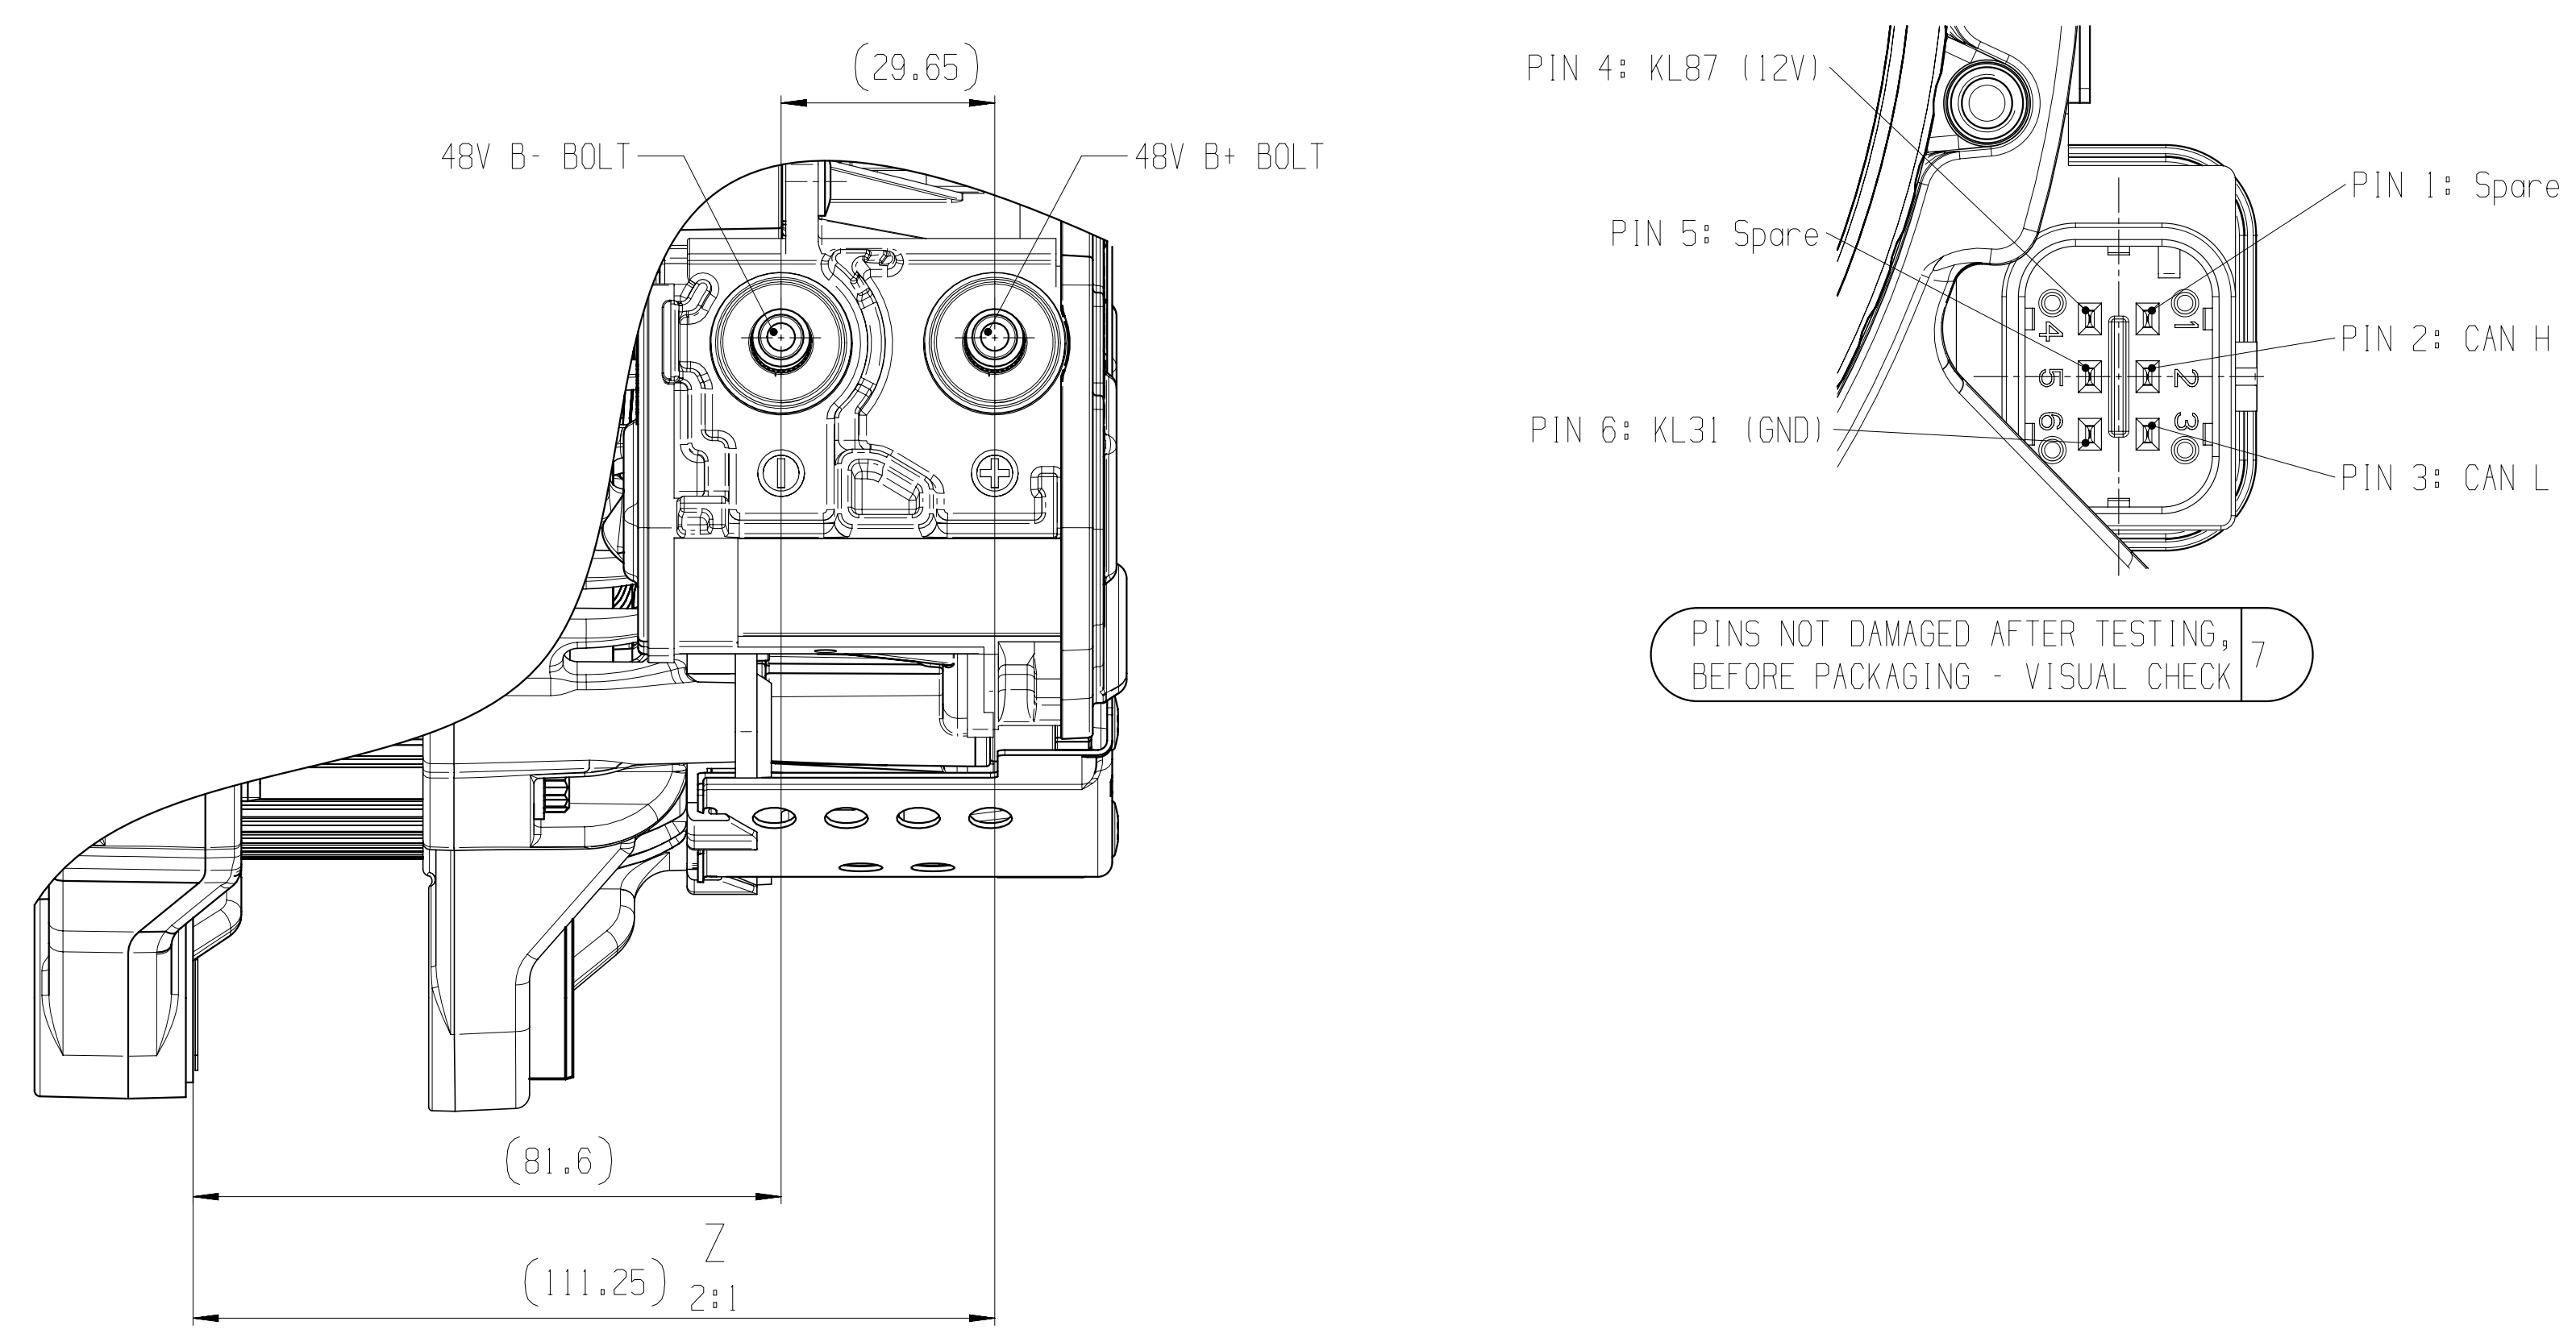

PINS NOT DAMAGED AFTER TESTING, BEFORE PACKAGING - VISUAL CHECK 7

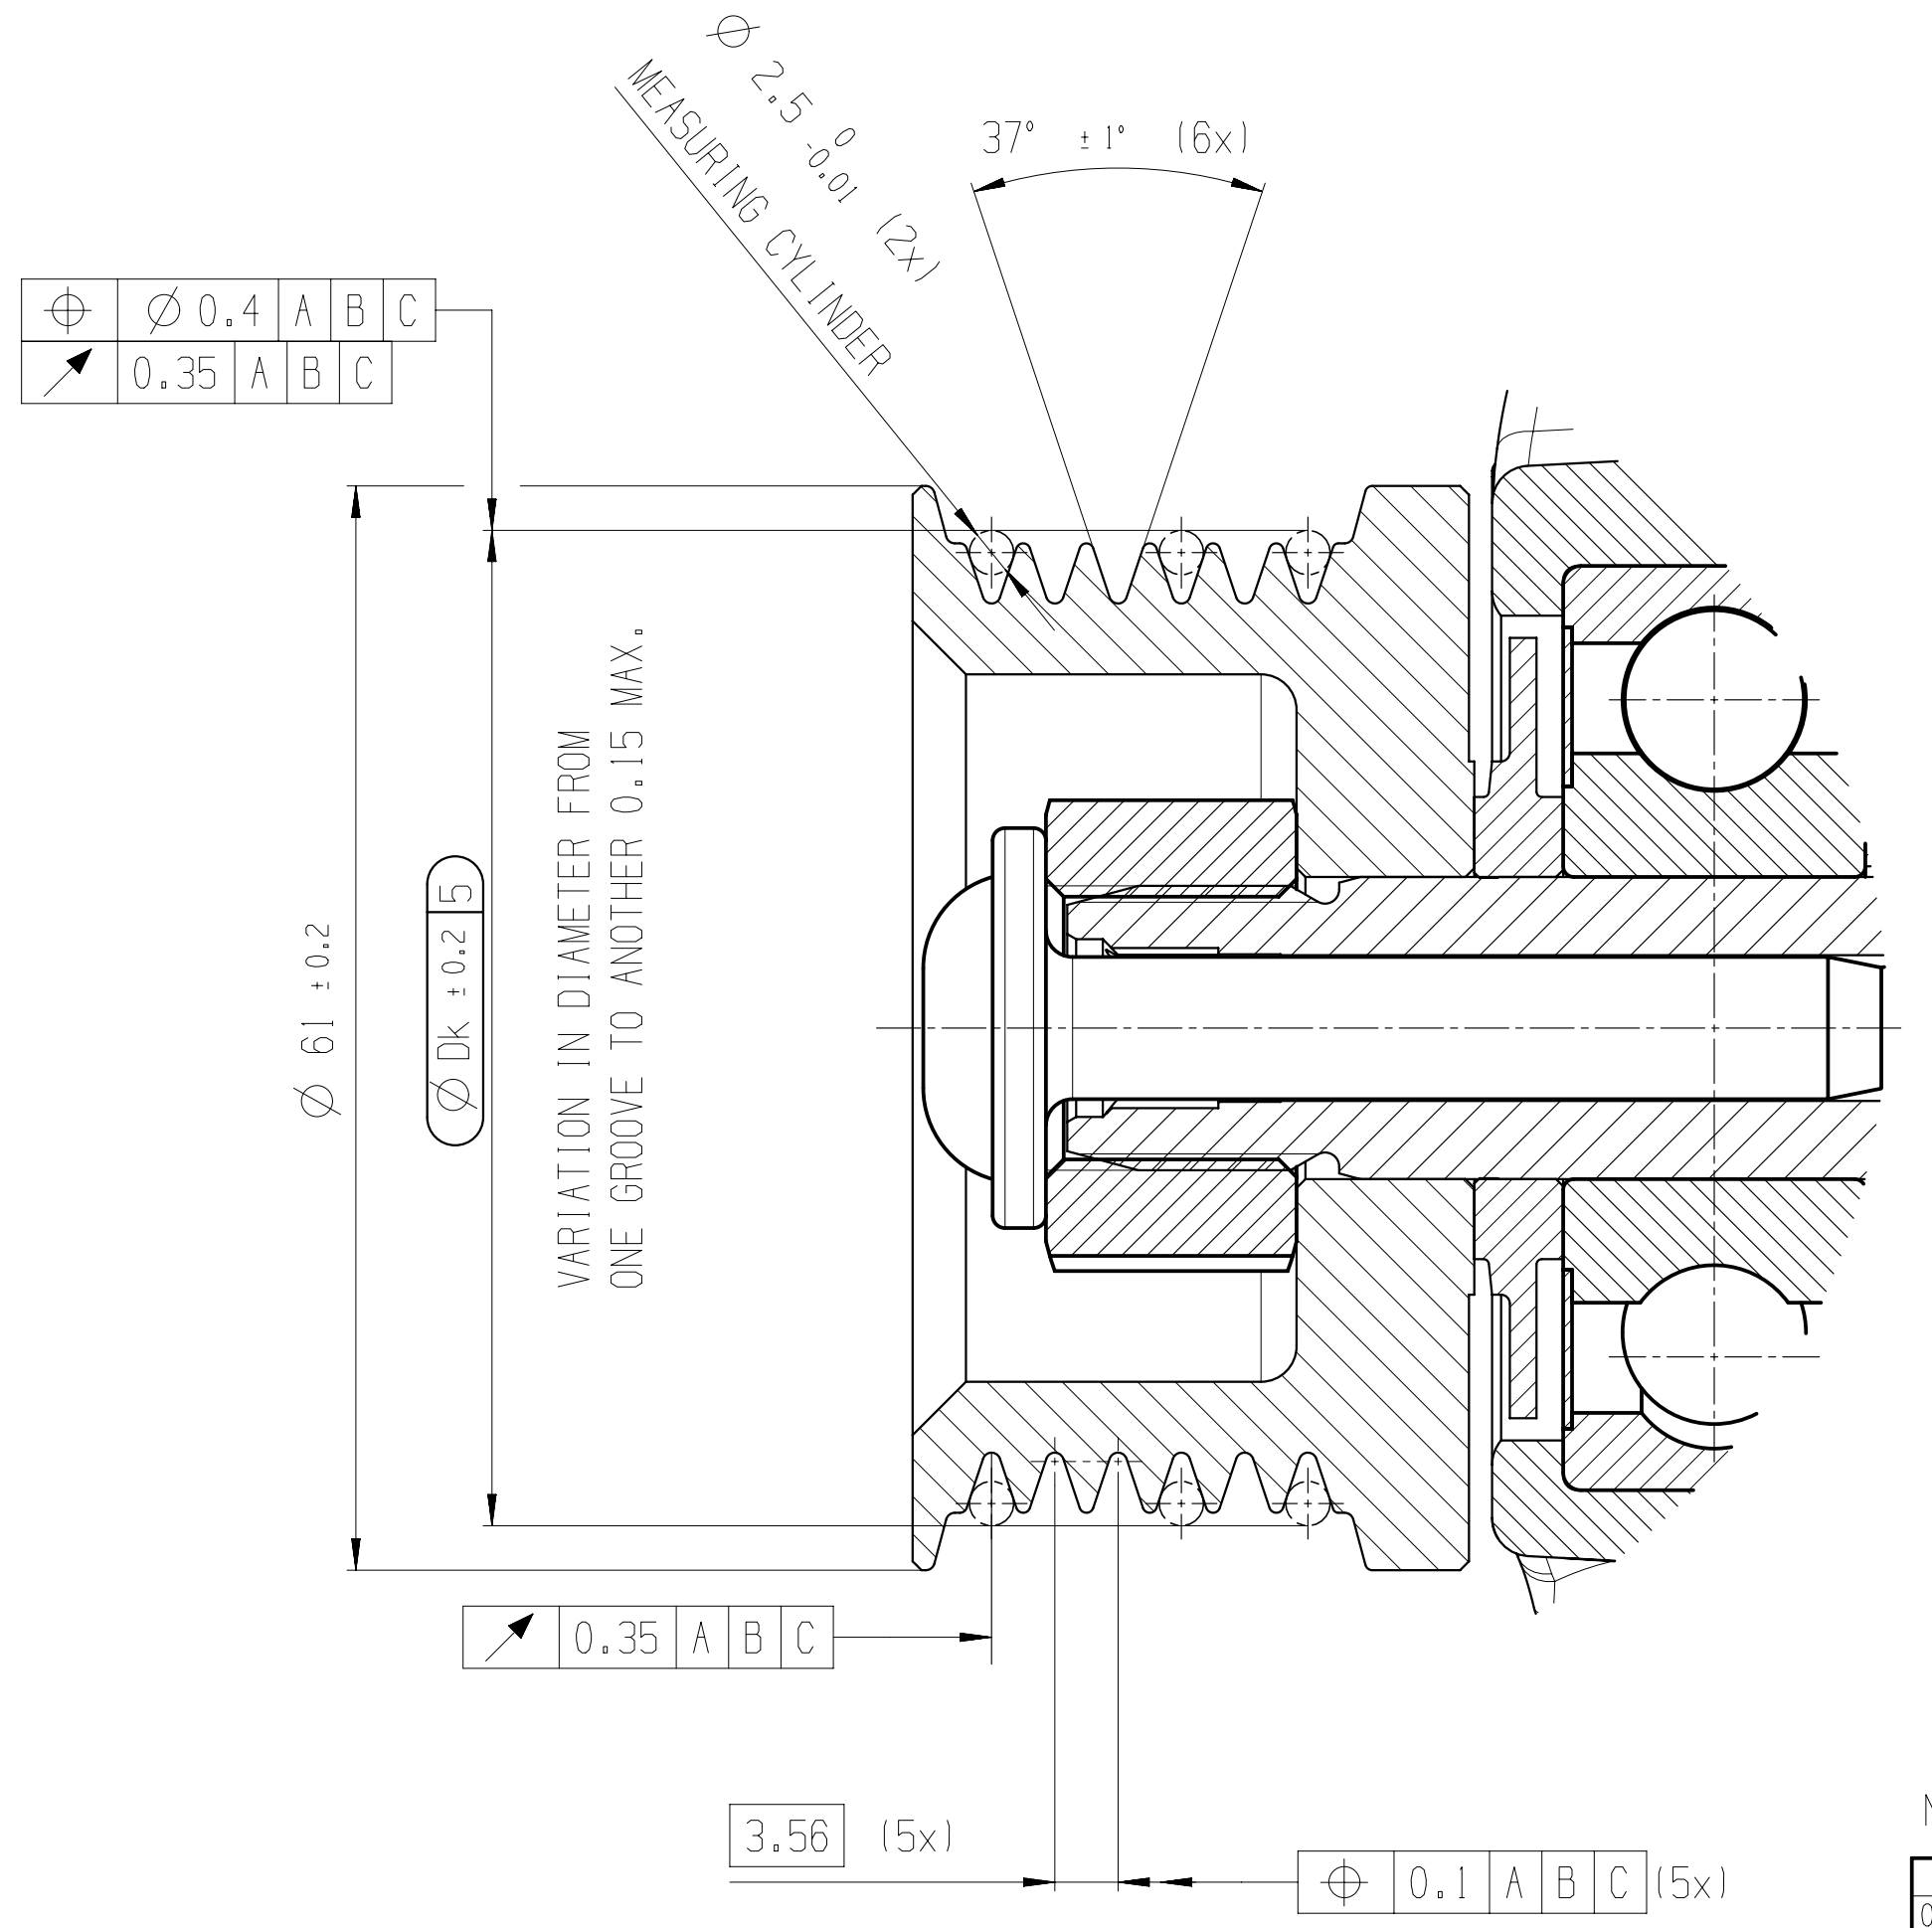

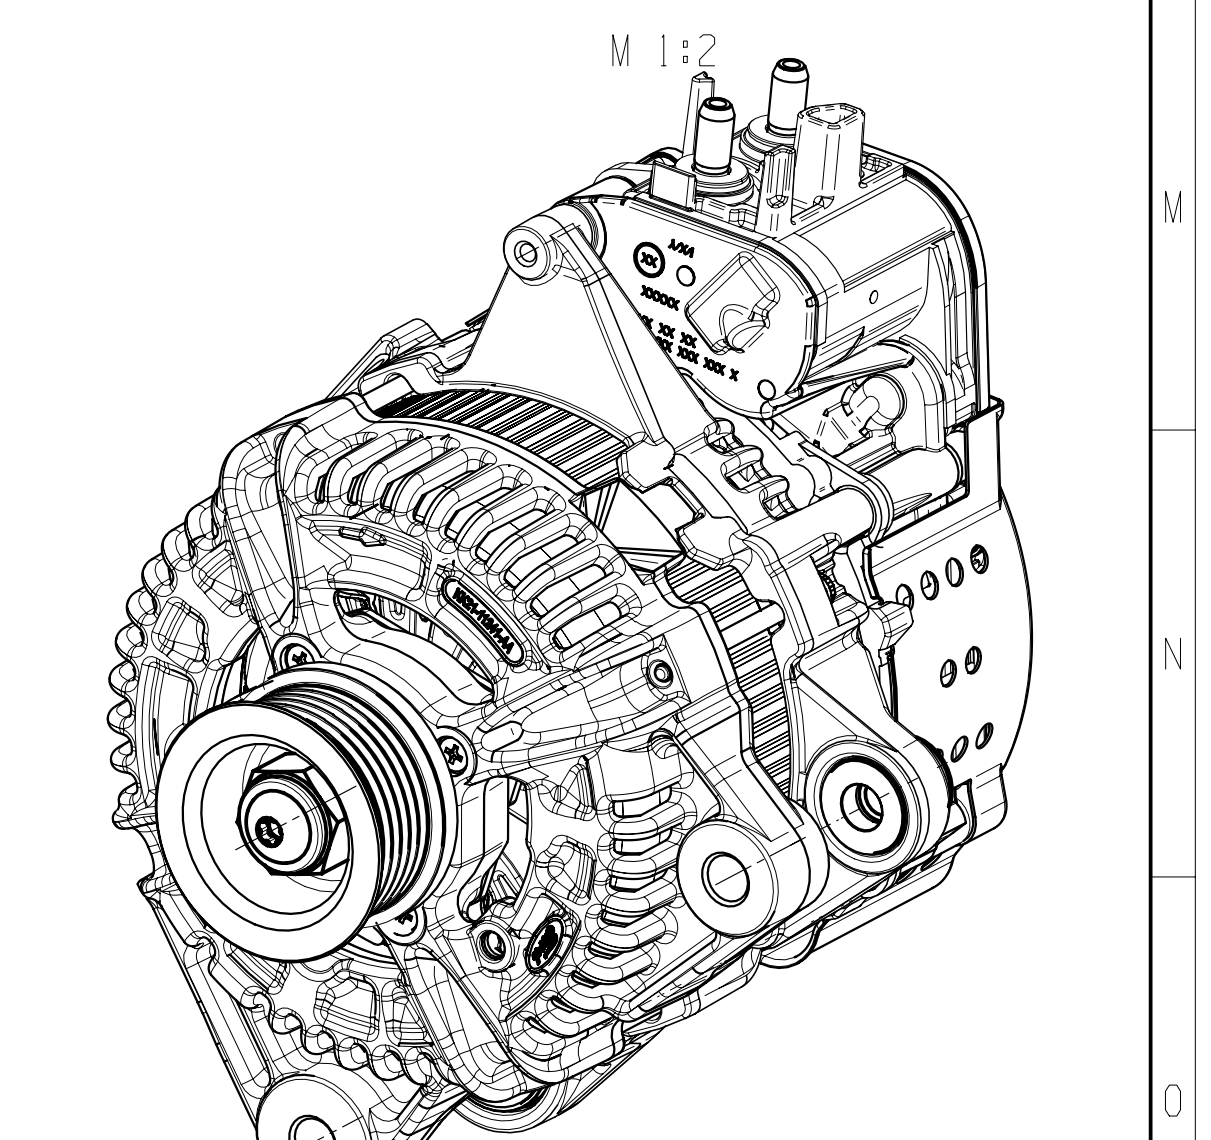

TIGHTENING TORQUES ACCORDING TO POS. 990.3
POS. 004.0: 3.8 ... 4.3 NM - TIGHTENED IN PRE-STAGE
POS. 053.0: 2.3 ... 2.6 NM
POS. 061.0: 2.3 ... 2.6 NM
POS. 070.0: 5.7 ... 6.1 NM - TIGHTENED IN PRE-STAGE

TIGHTENING PROCESS FOR POS. 051.0 AND 052.0 ACCORDING TO POS. 990.4:
TIGHTENING TORQUES: 5.7 ... 6.1 NM

POS. 094.0: 38 ... 40 NM

TIGHTENING PROCESS POS. 092.0 ACCORDING TO POS. 990.5
STEP1: TORQUE CONTROLLED, TORQUE 38 ... 42 NM |F 7
STEP2: ANGLE CONTROLLED, NUT ANGLE: 60° ... 66°
MIN. LIMIT OF TORQUE: 135 NM
MAX. LIMIT OF TORQUE: 200 NM

IN CASE OF SERVICE OR REWORK POS. 092.0 HAS TO BE TIGHTENED TORQUE CONTROLLED: 141 ... 145 NM

CIRCUIT DIAGRAM

BRM
BOOST RECUPERATION MACHINE

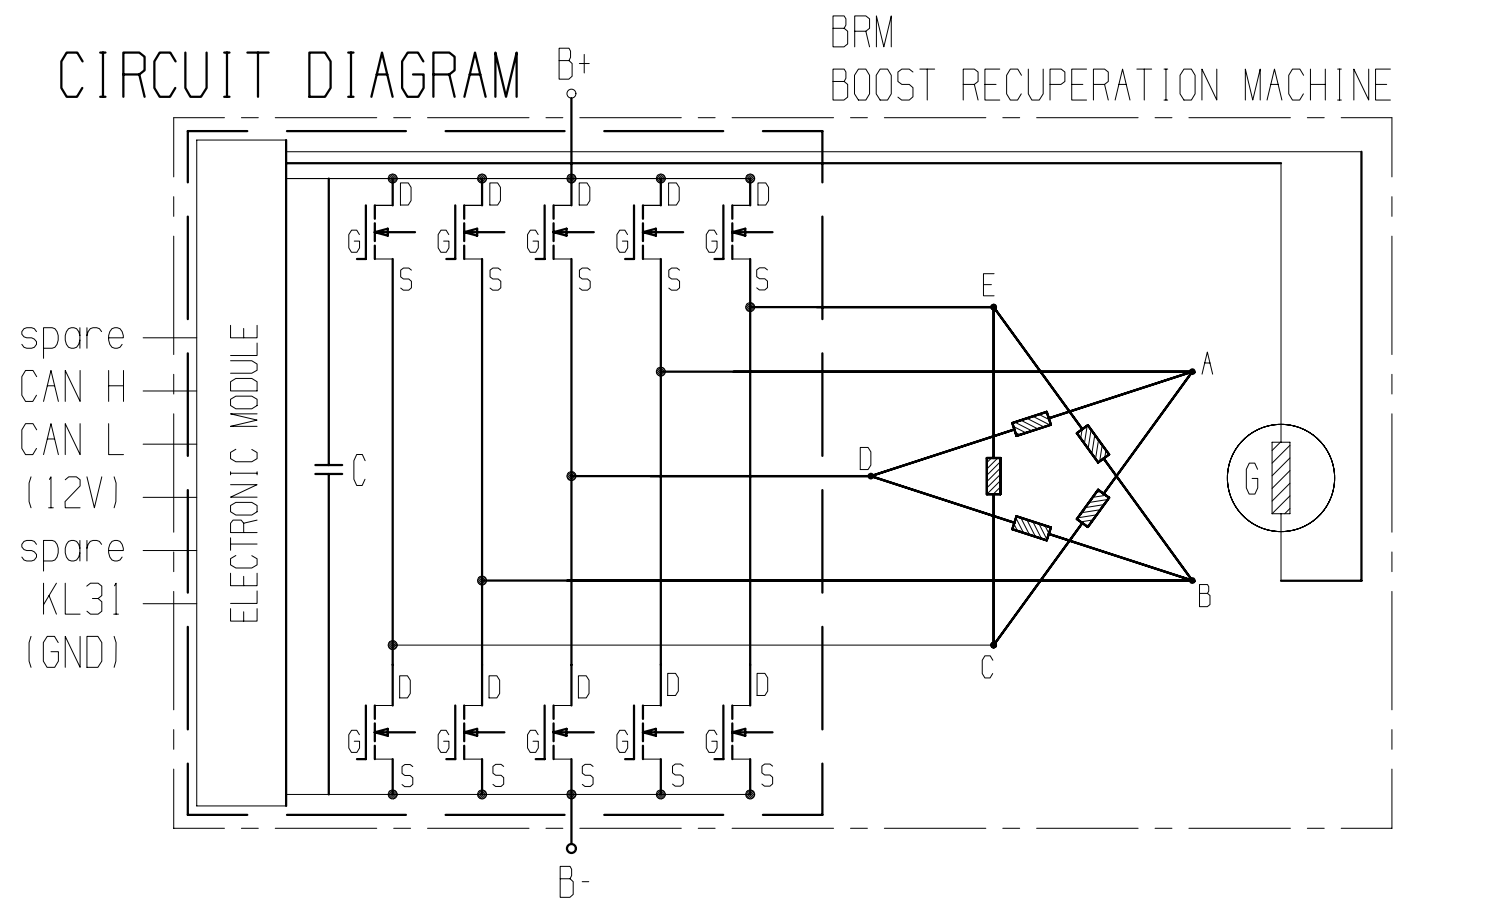

NUMBER OF CHECKING DIMENSIONS: 14 (... X)

SEE TEST SPECIFICATION: POS.990.9

NUMBER OF PERMANENT MAGNETS: 16

⊛ DIMENSION RELATED TO (Ø 10.85)

0 127 813 034	0 127 813 034	KK21-11238-BA	BISG -> 48V	NOTE 1*	0 127 813 034	HB0CC	0 127 A00 187	56	48.4
RELEASE NO.	ORDER NO.	FIELD 1	FIELD 2	FIELD 3	FIELD 4	FIELD 5	RELEVANT OFFER DRAWING	Ø Dk	L
		TYPE / LABEL							

Size acc. to / Masse nach
ISO 14405-1:2010-12
envelope principle/ Huellprinzip Ⓔ

Ind.	Change/Aend.	YYYYMMDD	Drawn/Gez.	Checked/Gepr.	Releas./Freig.	BWN	Resp. dept./Verantw. Abt.	Add. info./Zus. Info.
02	0127F00030	20200513	FGQ	FGD	FGQ	9000	SGES/TEF10	
01	0127E0169601	20200513	TFE2MC	PEZ	.	71F0	SG/EBB	
00	initial	20200116	TFE2MC	.	.	71F0	SG/EBB	.

Treatment/Behandlung
Missed Details/Fehlende Angaben
Size/Gst.
Mat./Stoff
From/Aus
Lang./Spr. en/de
Wght./Gew.
Crit. P.
Scale/M.stab 1:1
MNR
SEG AUTOMOTIVE
Mat.meets/Stoffe s. N 2580-1
Syst. .
MOTOR
ELEKTROMOTOR
BRM
FORD
Sheet/Bl. 1 / 1
Doc. type DRW
0 127 813 034
DP/TD 000
Ind. 02
Format A0
Repl. for 0 127 813 032
Repl. by

0127813034 DRW 000 02 MOTOR BRM

© SEG Automotive Germany GmbH. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distributing, as well as in the event of applications for industrial property rights.