

# Network layer: “data plane” roadmap

- Network layer: overview

- data plane
- control plane

- What’s inside a router

- input ports, switching, output ports
- buffer management, scheduling

- IP: the Internet Protocol

- datagram format
- addressing
- network address translation
- IPv6




- Generalized Forwarding, SDN

- match+action
- OpenFlow: match+action in action


- Middleboxes

# Network Layer: Internet

host, router network layer functions:

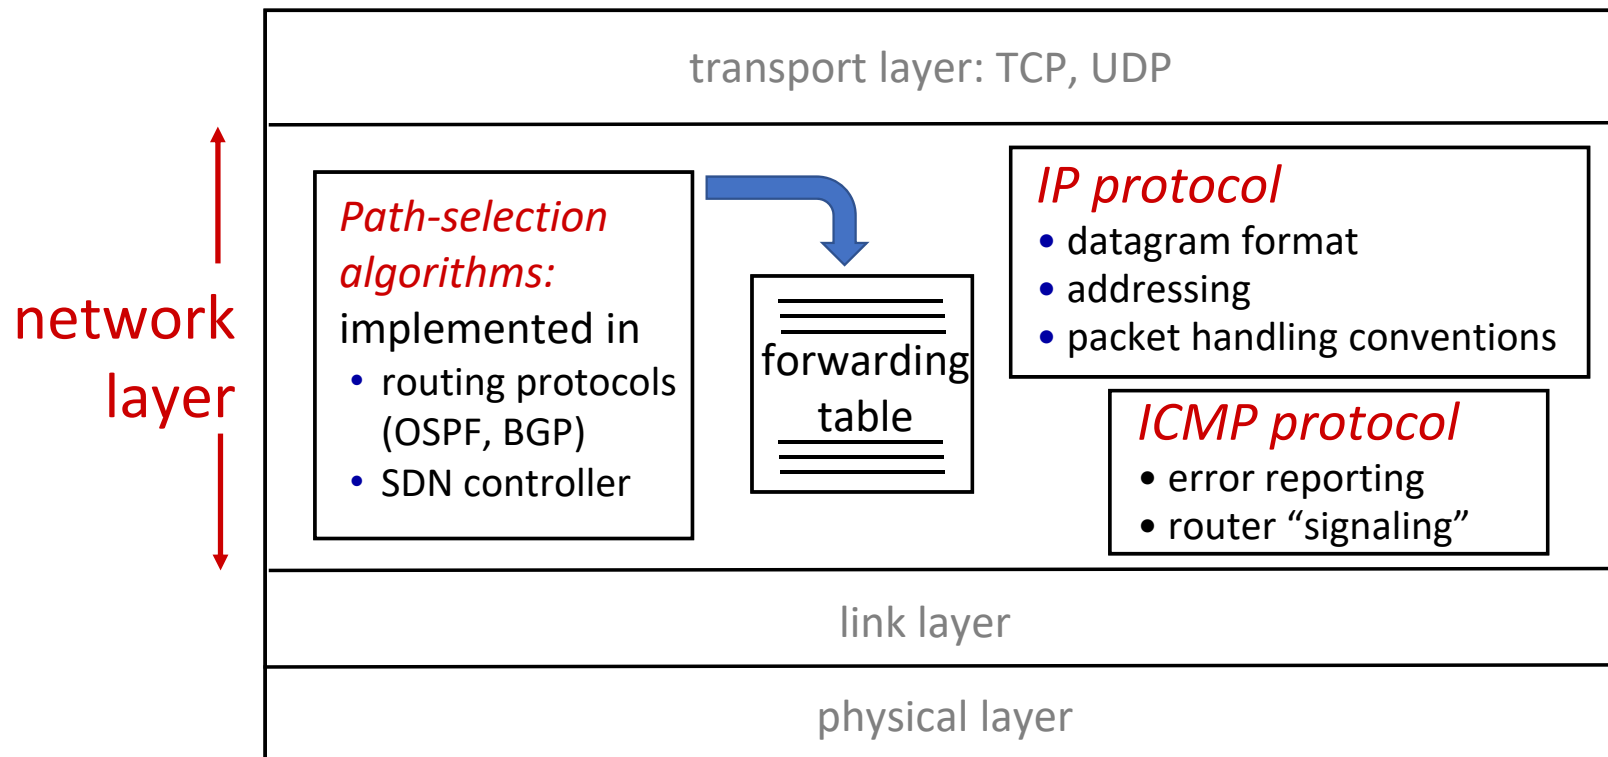


# IP Datagram format

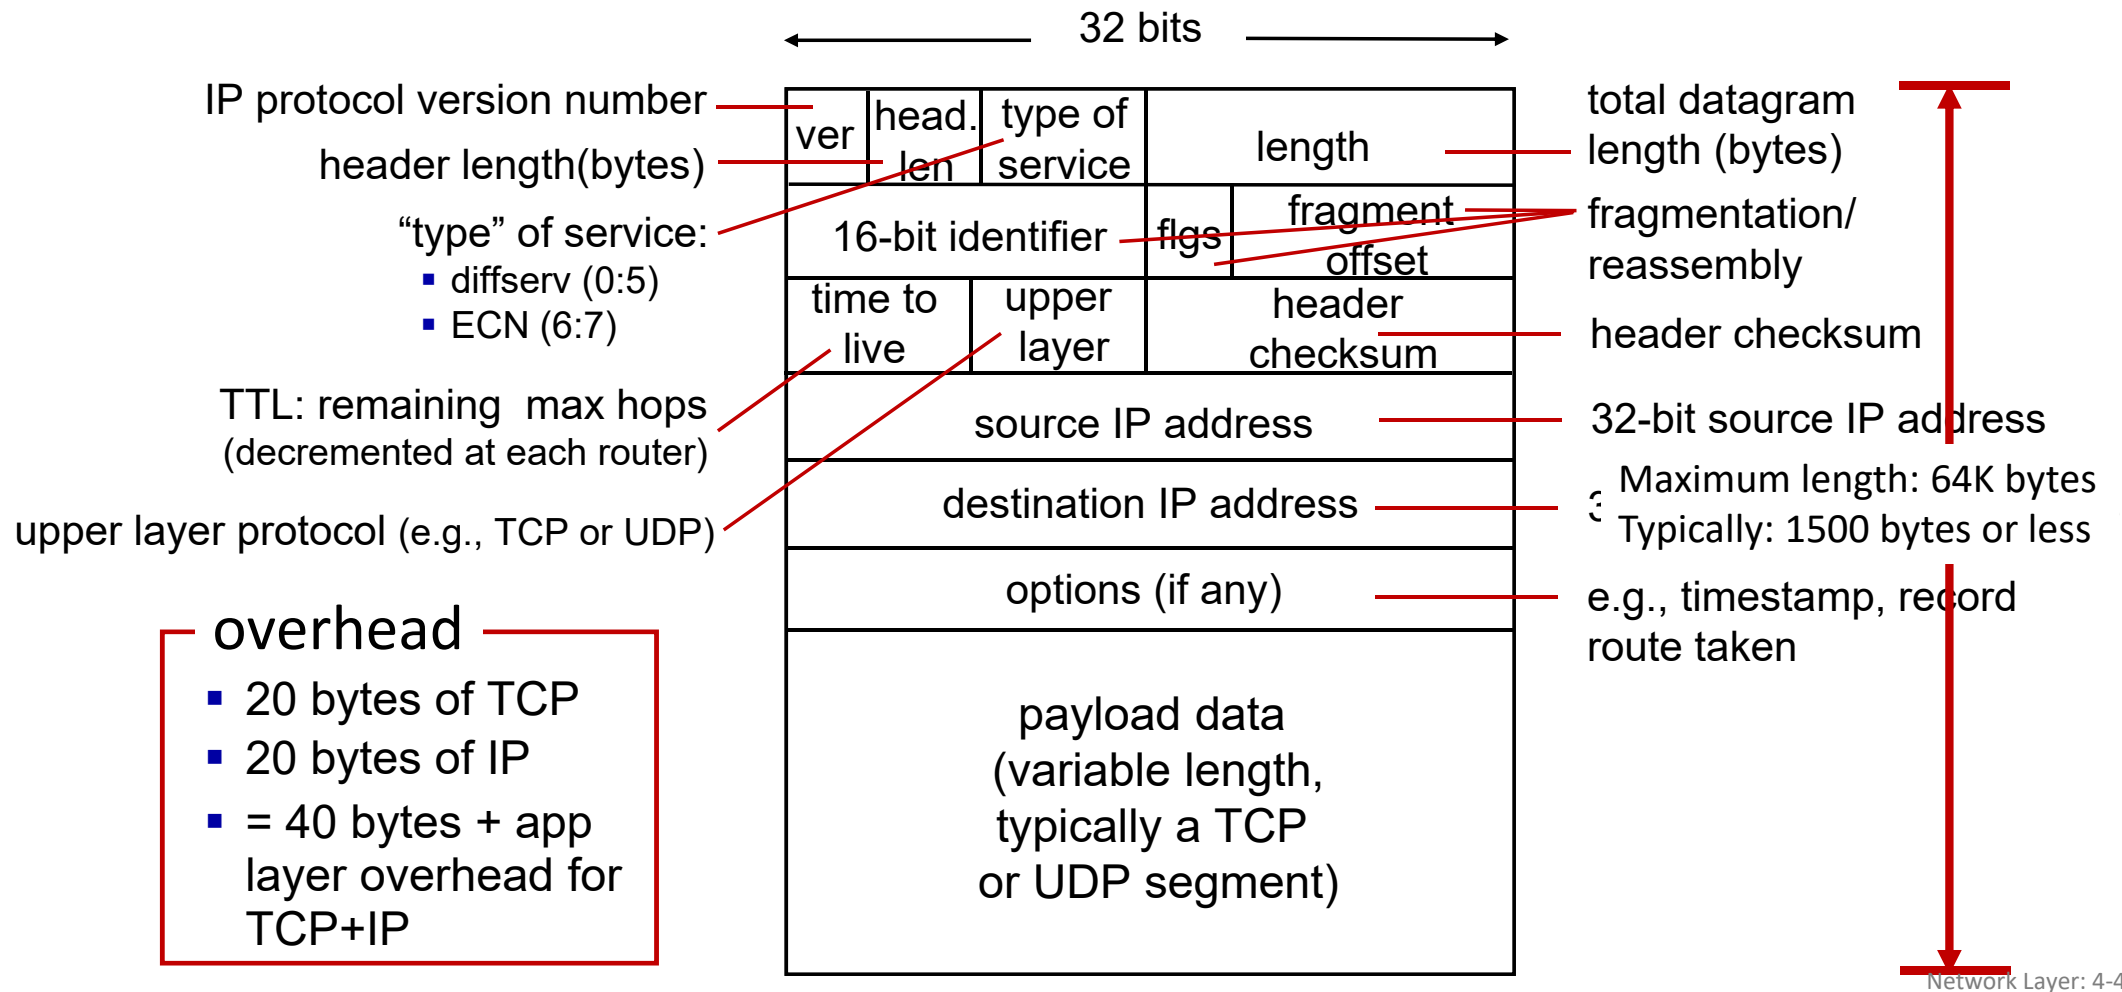

# IP addressing: introduction

- **IP address:** 32-bit identifier associated with each host or router *interface*
- **interface:** connection between host/router and physical link
  - router's typically have multiple interfaces
  - host typically has one or two interfaces (e.g., wired Ethernet, wireless 802.11)

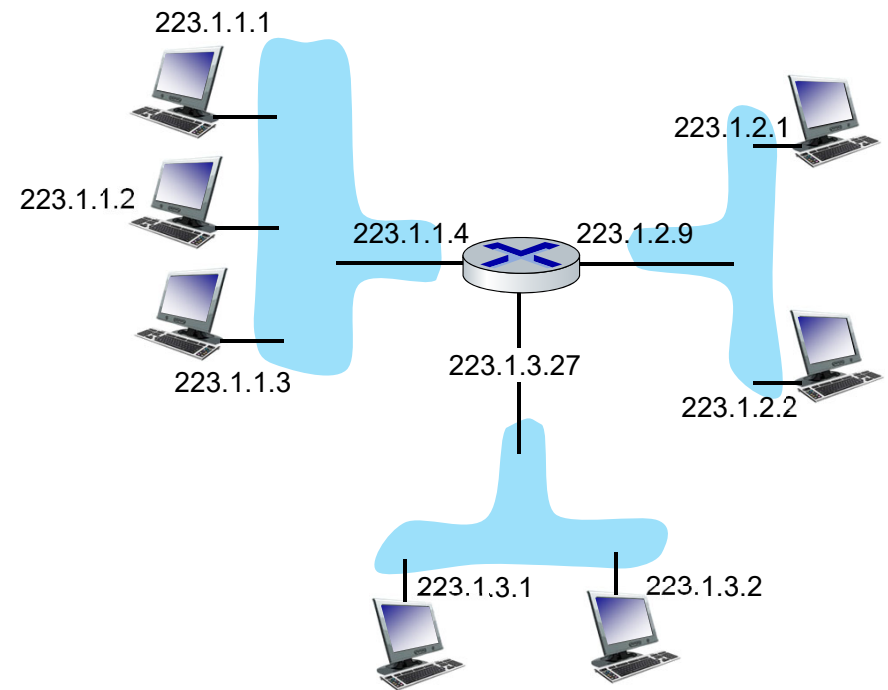

dotted-decimal IP address notation:


223.1.1.1 = 11011111 00000001 00000001 00000001

223                      1                      1                      1

Network Layer: 4-44

# IP addressing: introduction

- **IP address:** 32-bit identifier associated with each host or router *interface*
- **interface:** connection between host/router and physical link
  - router's typically have multiple interfaces
  - host typically has one or two interfaces (e.g., wired Ethernet, wireless 802.11)

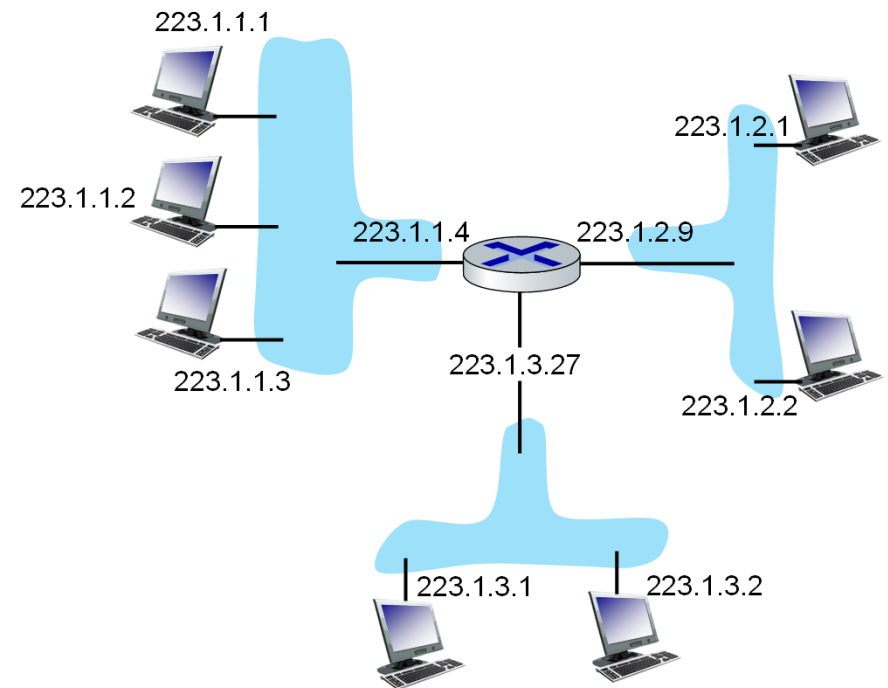

dotted-decimal IP address notation:

223.1.1.1 = 11011111 00000001 00000001 00000001

223                      1                      1                      1

Network Layer: 4-45


# IP addressing: introduction

**Q:** how are interfaces actually connected?

**A:** we'll learn about that in chapters 6, 7

*For now:* don't need to worry about how one interface is connected to another (with no intervening router)


**A:** wired Ethernet interfaces connected by Ethernet switches

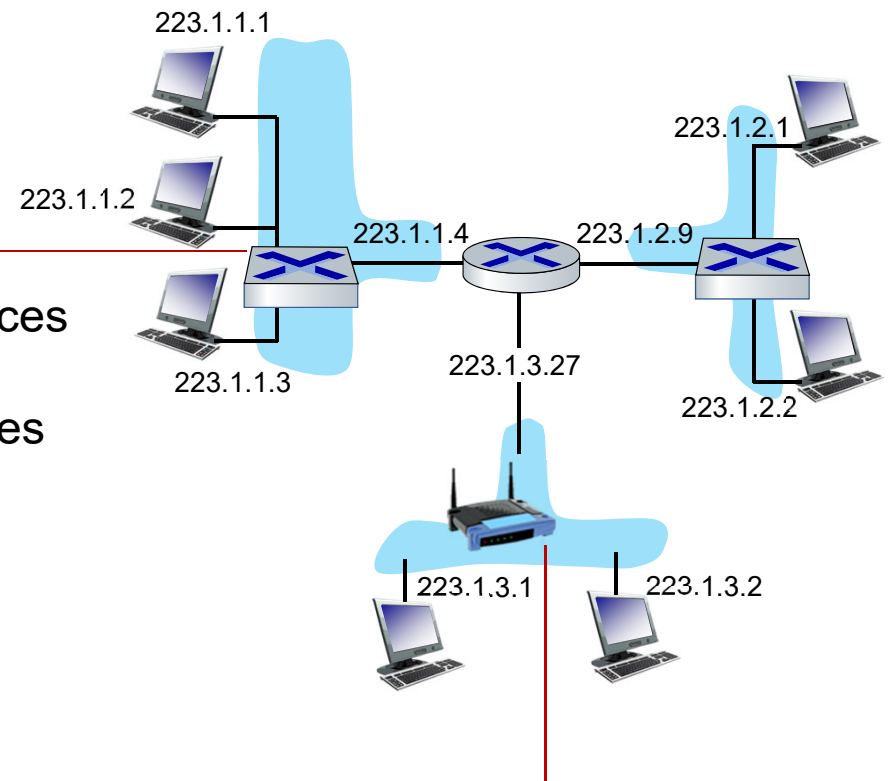

**A:** wireless WiFi interfaces connected by WiFi base station

# Subnets

- *What's a subnet ?*
  - device interfaces that can physically reach each other **without passing through an intervening router**
- IP addresses have structure:
  - **subnet part:** devices in same subnet have common high order bits
  - **host part: remaining** low order bits

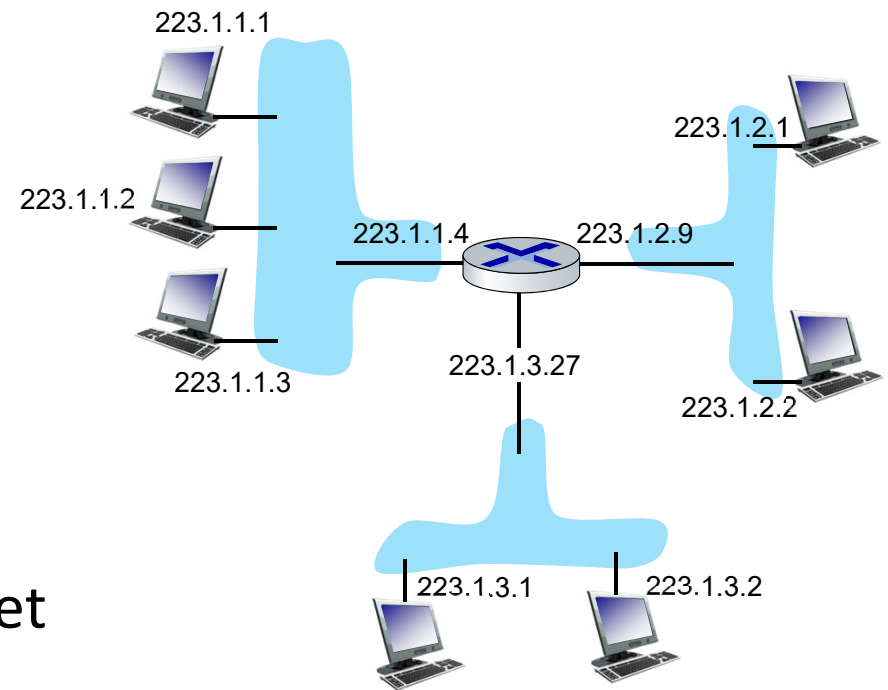


network consisting of 3 subnets

# Subnets

## *Recipe for defining subnets:*

- detach each interface from its host or router, creating “islands” of isolated networks
- each isolated network is called a *subnet*

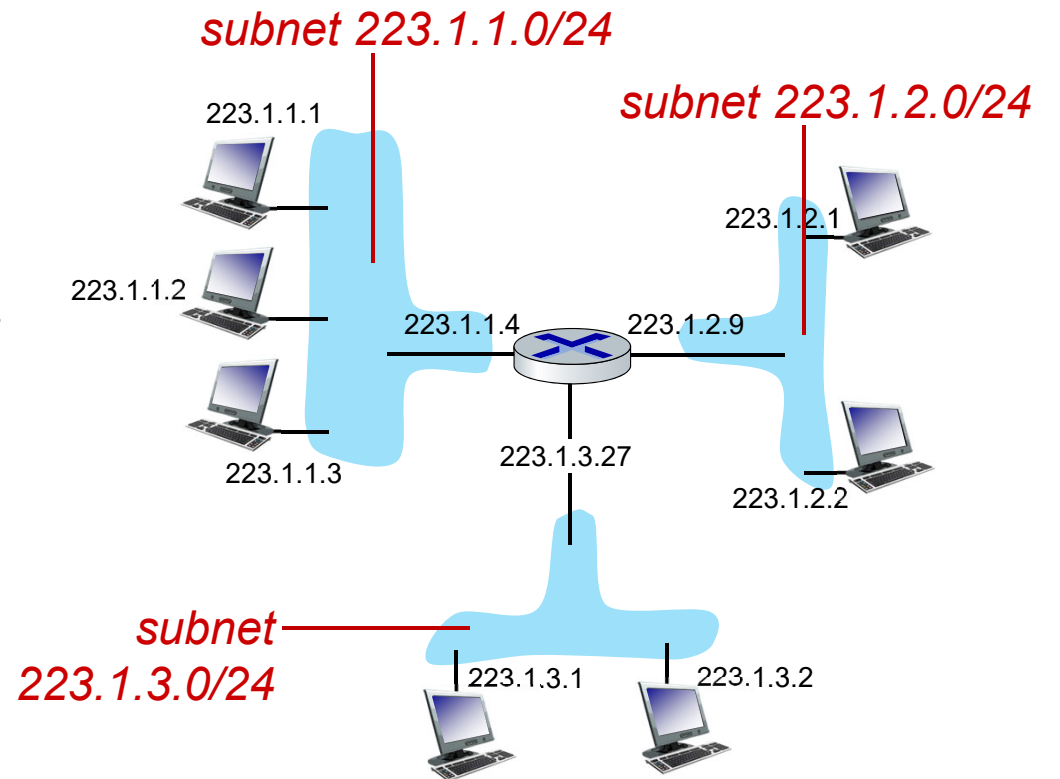


subnet mask: /24  
(high-order 24 bits: subnet part of IP address)



# Subnets


- where are the subnets?
- what are the /24 subnet addresses?

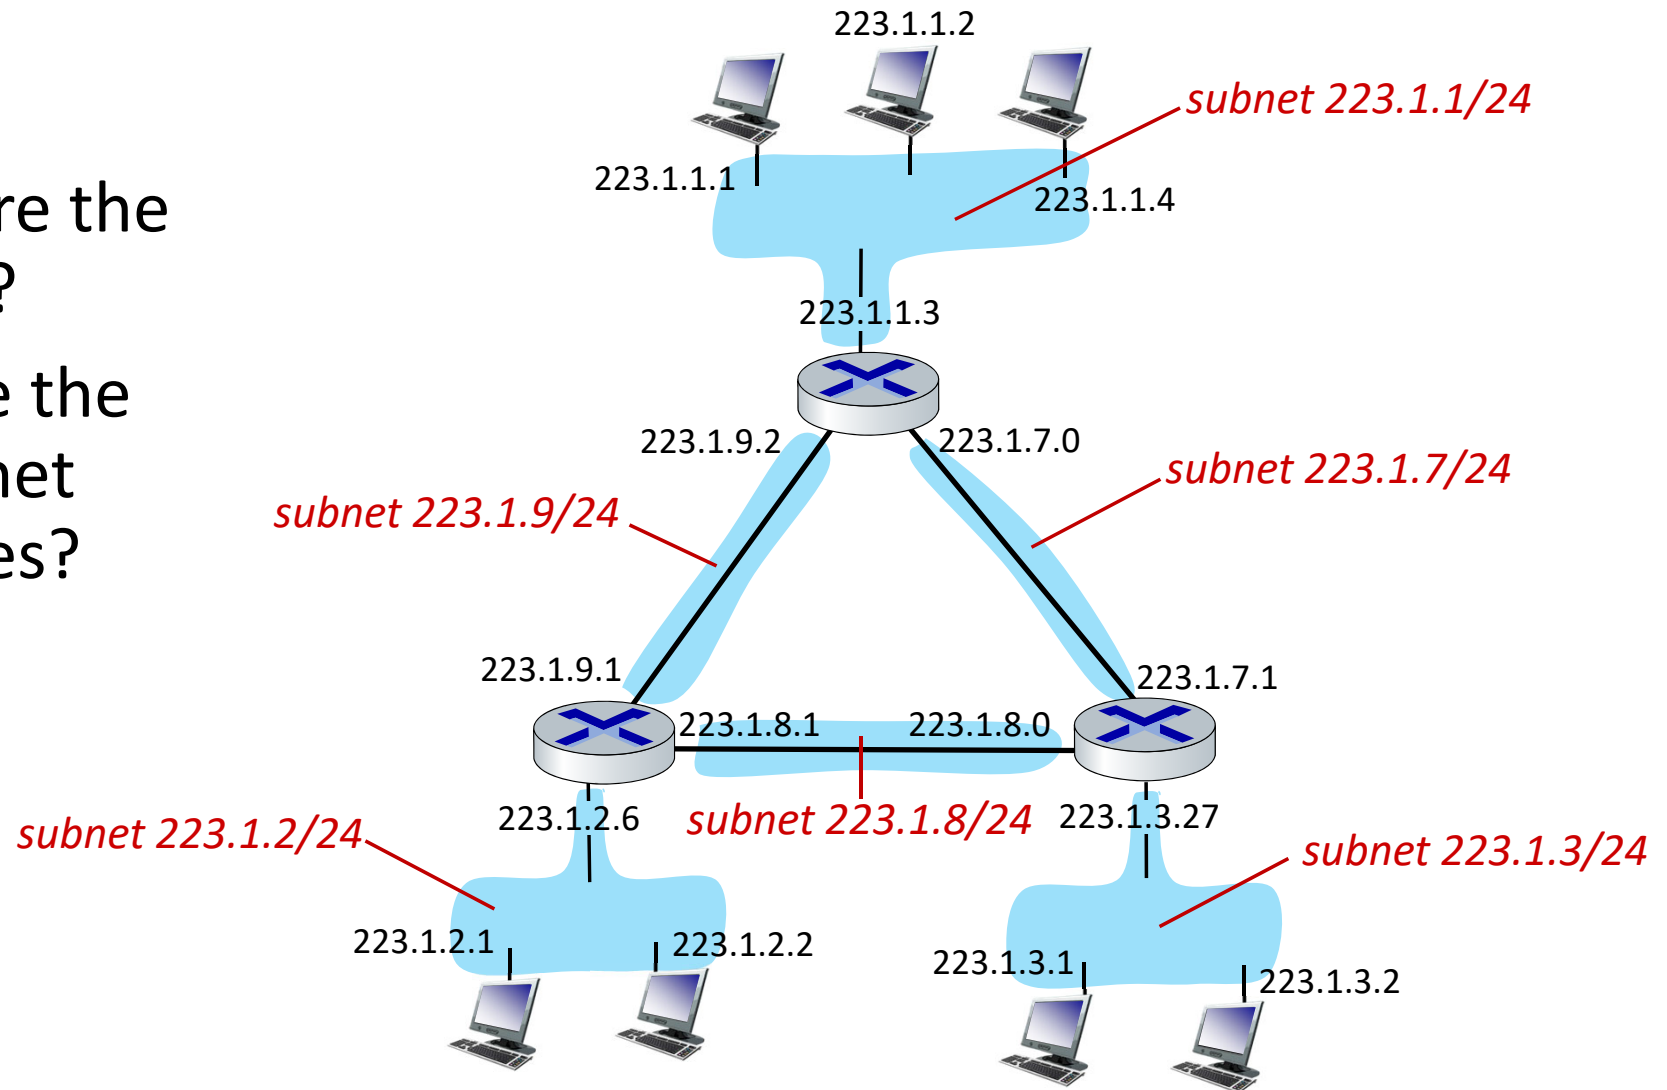

# IP addressing: CIDR

**CIDR: Classless InterDomain Routing** (pronounced “cider”)

- subnet portion of address of arbitrary length
- address format: **a.b.c.d/x**, where x is # bits in subnet portion of address

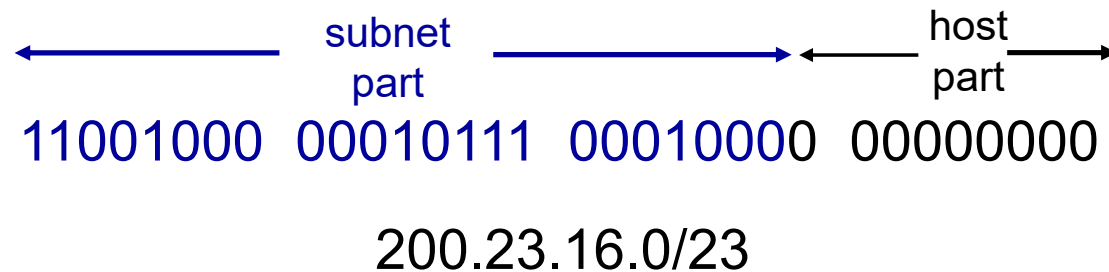

# IP addresses: how to get one?

That's actually **two** questions:

1. Q: How does a *host* get IP address within its network (host part of address)?
2. Q: How does a *network* get IP address for itself (network part of address)

How does *host* get IP address?

- hard-coded by sysadmin in config file (e.g., /etc/rc.config in UNIX)
- **DHCP**: **D**ynamic **H**ost **C**onfiguration **P**rotocol: dynamically get address from a server
  - “plug-and-play”

# DHCP: Dynamic Host Configuration Protocol


**goal:** host *dynamically* obtains IP address from network server when it “joins” network

- can renew its lease on address in use
- allows reuse of addresses (only hold address while connected/on)
- support for mobile users who join/leave network

## DHCP overview:

- host broadcasts **DHCP discover** msg [optional]
- DHCP server responds with **DHCP offer** msg [optional]
- host requests IP address: **DHCP request** msg
- DHCP server sends address: **DHCP ack** msg

# DHCP client-server scenario

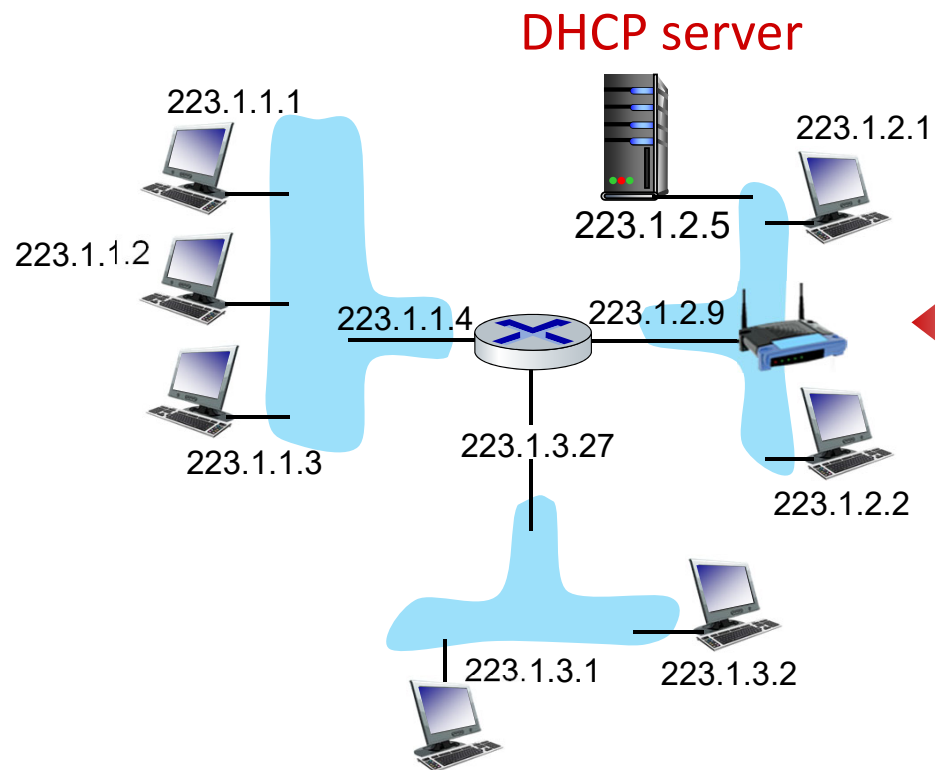


Typically, DHCP server will be co-located in router, serving all subnets to which router is attached



arriving **DHCP client** needs address in this network

# DHCP client-server scenario

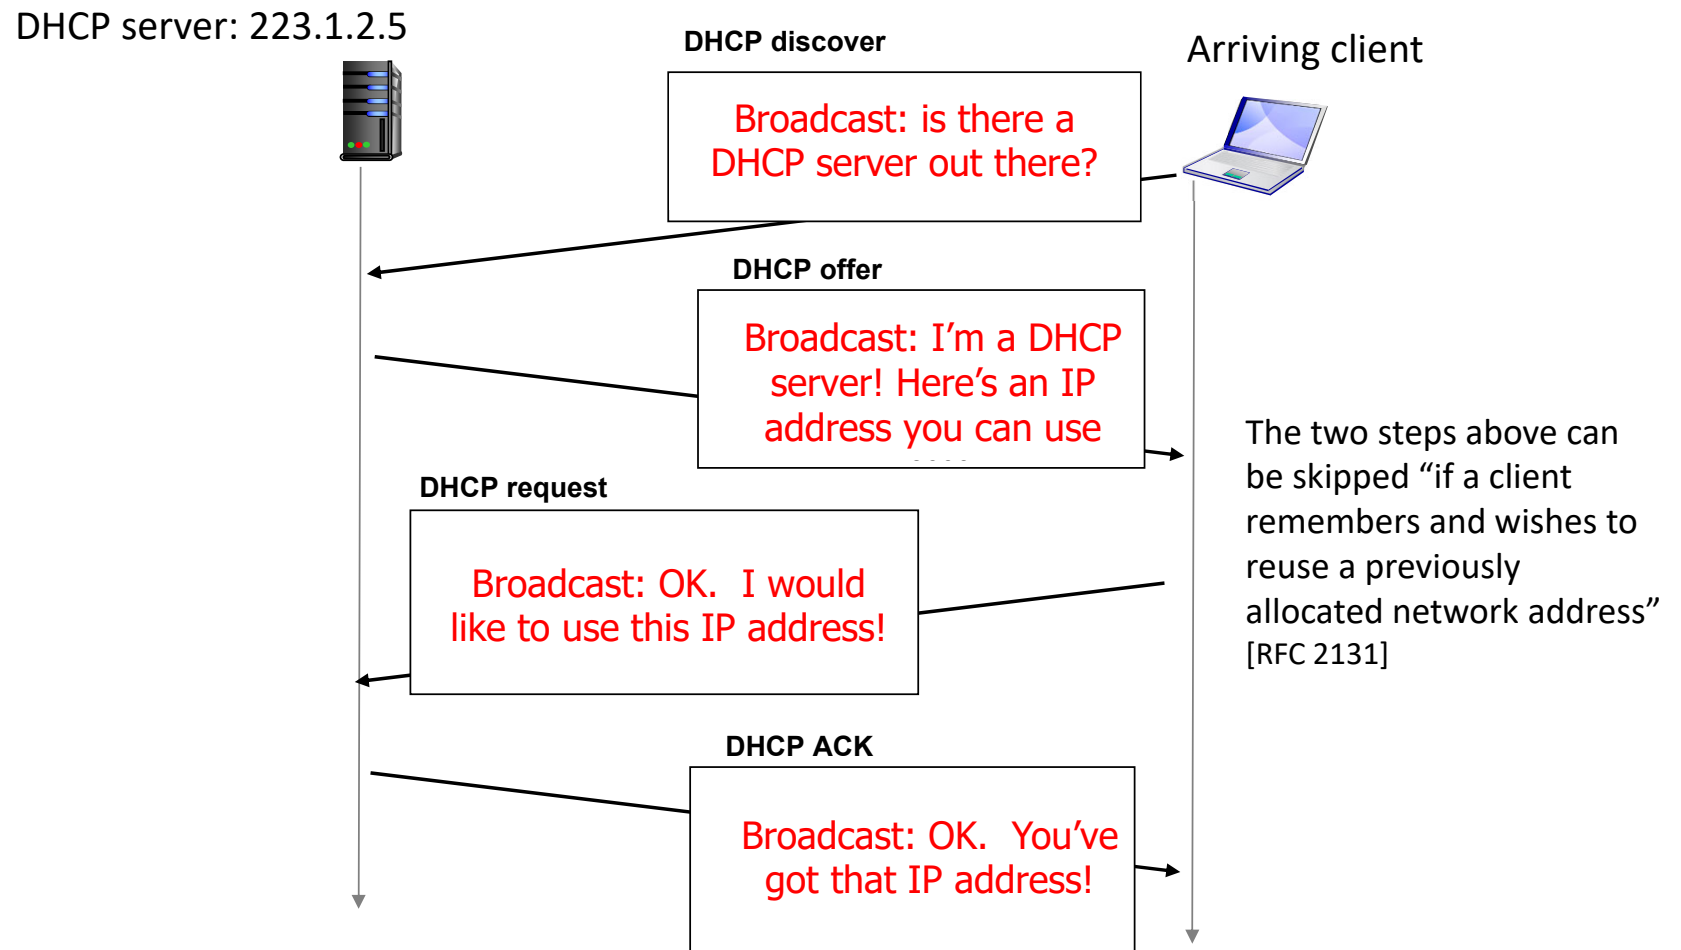


# DHCP: more than IP addresses

DHCP can return more than just allocated IP address on subnet:

- address of first-hop router for client
- name and IP address of DNS sever
- network mask (indicating network versus host portion of address)


# DHCP: example

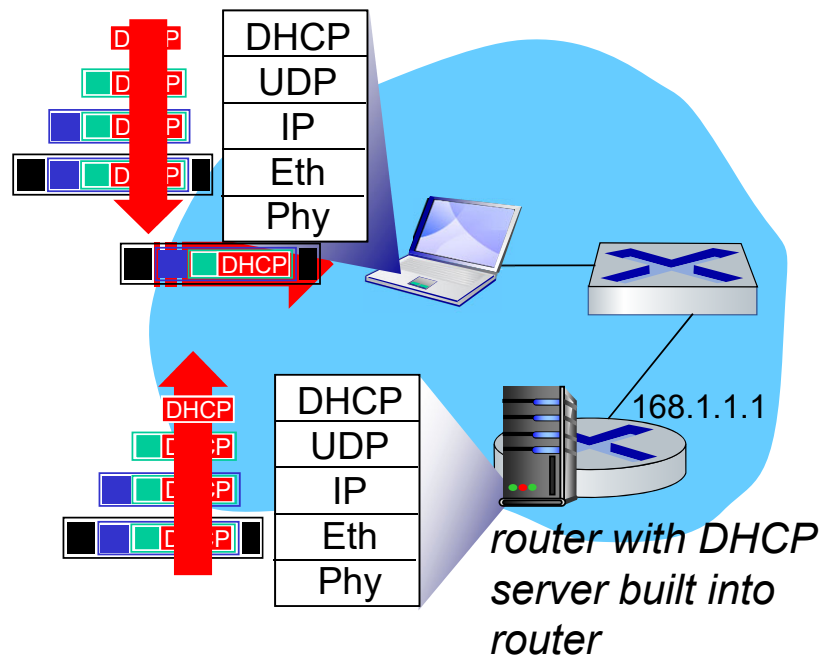

- Connecting laptop will use DHCP to get IP address, address of first-hop router, address of DNS server.
- DHCP REQUEST message encapsulated in UDP, encapsulated in IP, encapsulated in Ethernet
- Ethernet frame broadcast (dest: FFFFFFFFFFFFFFFF) on LAN, received at router running DHCP server
- Ethernet demux'ed to IP demux'ed, UDP demux'ed to DHCP



# DHCP: example

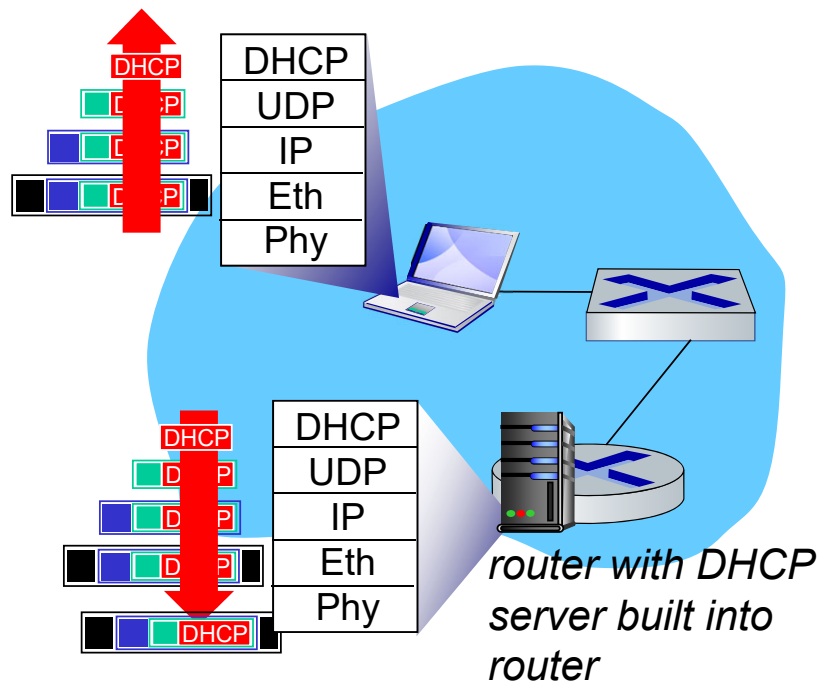

- DCP server formulates DHCP ACK containing client's IP address, IP address of first-hop router for client, name & IP address of DNS server
- encapsulated DHCP server reply forwarded to client, demuxing up to DHCP at client
- client now knows its IP address, name and IP address of DNS server, IP address of its first-hop router

# IP addresses: how to get one?

**Q:** how does *network* get subnet part of IP address?

**A:** gets allocated portion of its provider ISP's address space


ISP's block      11001000 00010111 00010000 00000000    200.23.16.0/20

ISP can then allocate out its address space in 8 blocks:

Organization 0	<u>11001000 00010111 00010000</u>	00000000	200.23.16.0/23
Organization 1	<u>11001000 00010111 00010010</u>	00000000	200.23.18.0/23
Organization 2	<u>11001000 00010111 00010100</u>	00000000	200.23.20.0/23
...	.....	....	....
Organization 7	<u>11001000 00010111 00011110</u>	00000000	200.23.30.0/23


# Hierarchical addressing: route aggregation

hierarchical addressing allows efficient advertisement of routing information:

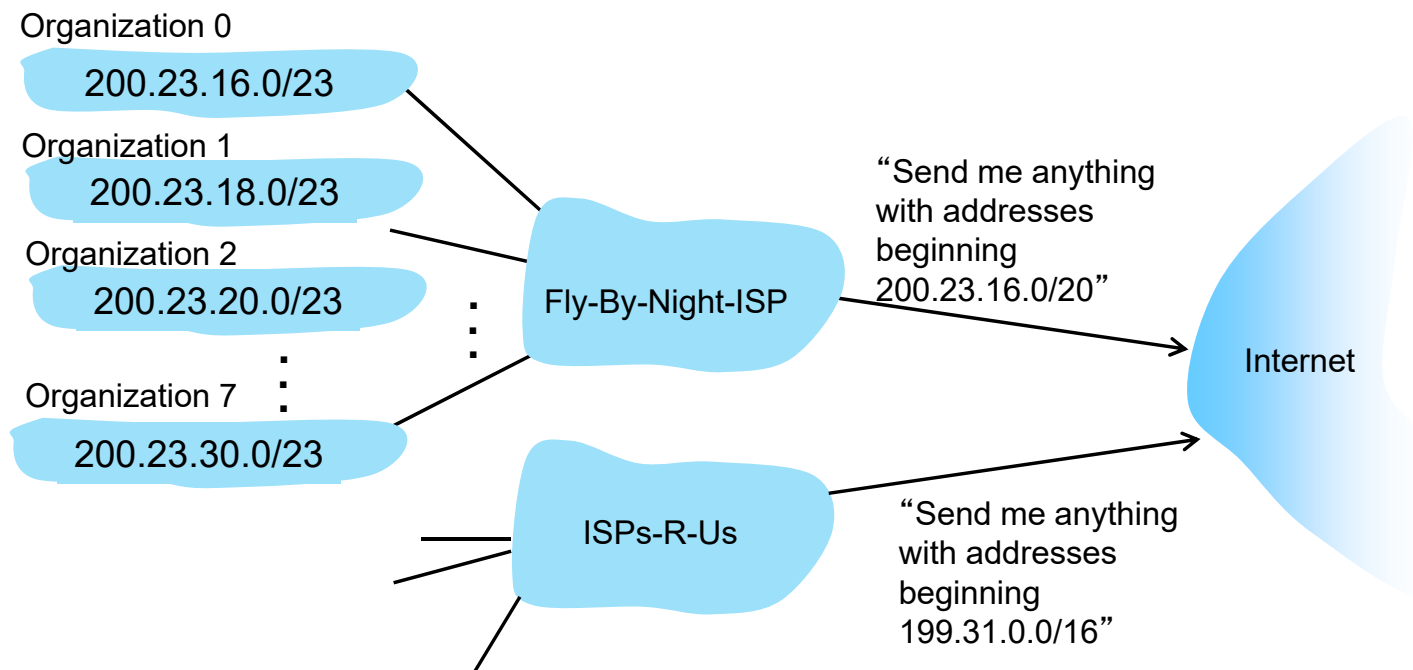


# Hierarchical addressing: more specific routes

- Organization 1 moves from Fly-By-Night-ISP to ISPs-R-Us
- ISPs-R-Us now advertises a more specific route to Organization 1

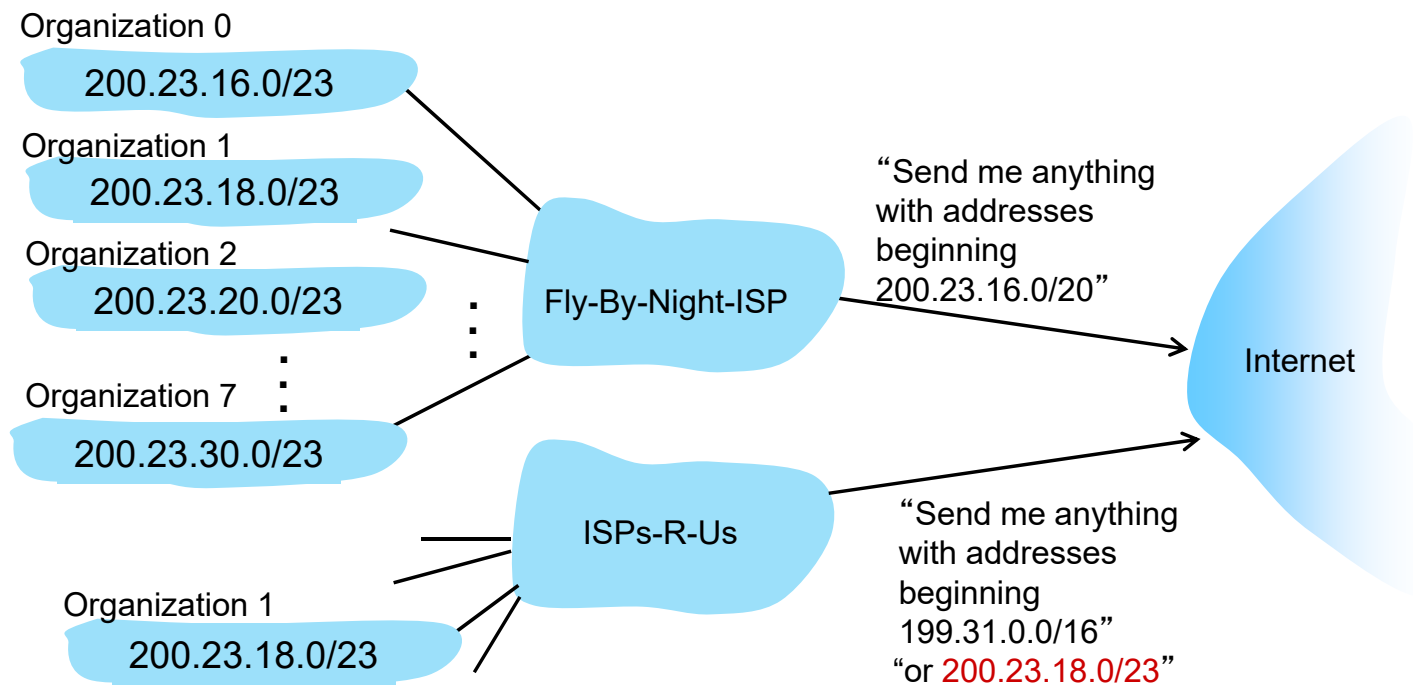

# Hierarchical addressing: more specific routes

- Organization 1 moves from Fly-By-Night-ISP to ISPs-R-Us
- ISPs-R-Us now advertises a more specific route to Organization 1

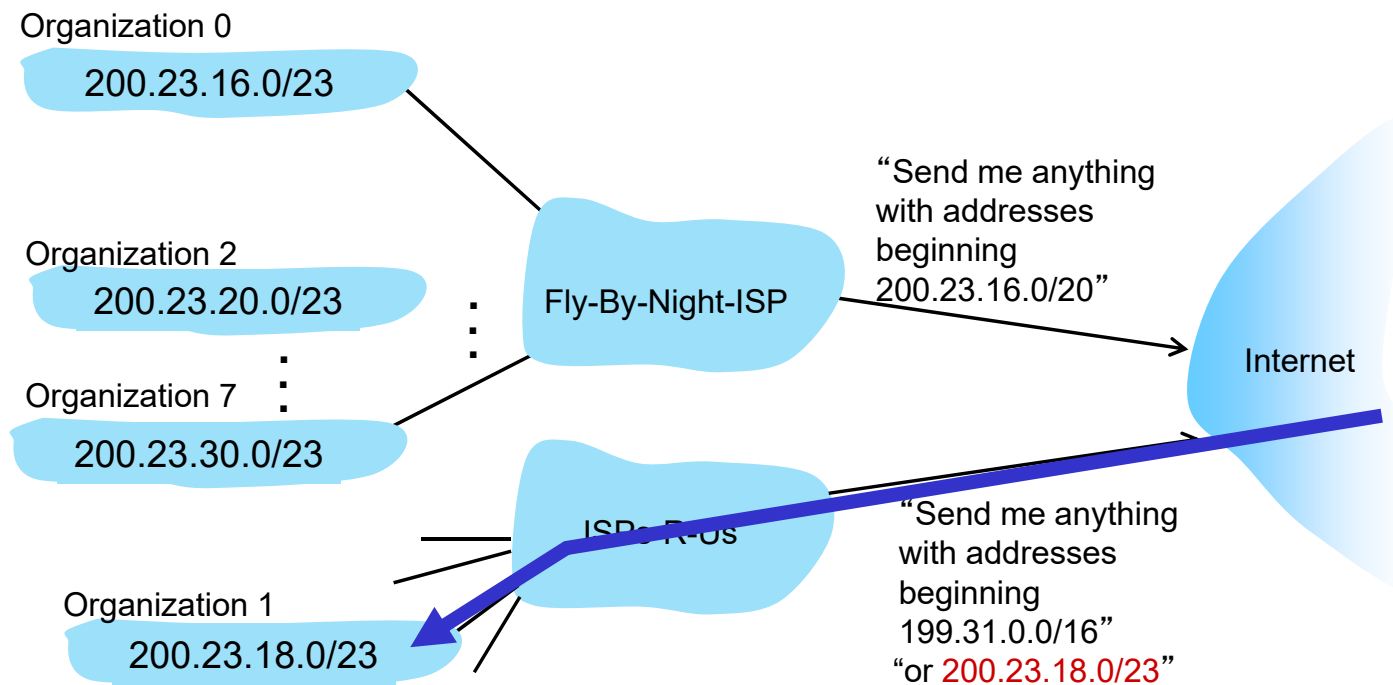

# IP addressing: last words ...

**Q:** how does an ISP get block of addresses?

**A:** ICANN: Internet Corporation for Assigned Names and Numbers  
<http://www.icann.org/>

- allocates IP addresses, through 5 regional registries (RRs) (who may then allocate to local registries)
- manages DNS root zone, including delegation of individual TLD (.com, .edu , ...) management

**Q:** are there enough 32-bit IP addresses?

- ICANN allocated last chunk of IPv4 addresses to RRs in 2011
- NAT (next) helps IPv4 address space exhaustion
- IPv6 has 128-bit address space

"Who the hell knew how much address space we needed?" Vint Cerf (reflecting on decision to make IPv4 address 32 bits long)