




Series Controller : Intelligent ETC Lane Controller

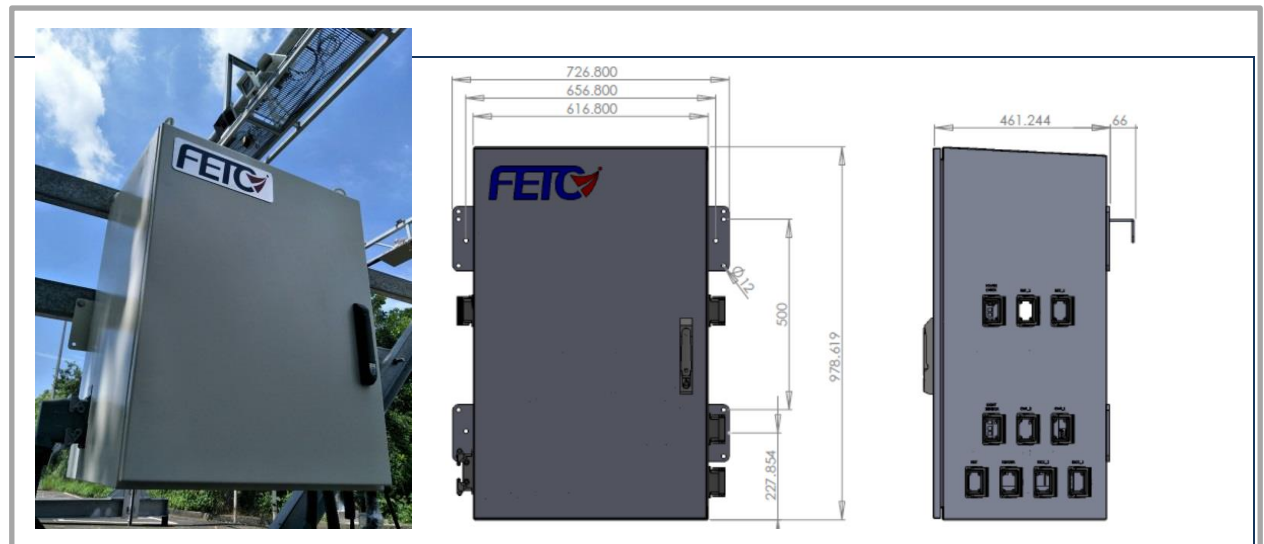

Controller	
CPU	Intel core i3/ i5/ i7
RAM	8G/ 16G/ 32G
OS	Linux
Physical Characteristics:	
Dimensions(H x W x D)	978.6mm*726.8mm*527.2mm <Inside: H: 19U/ W: 84HP(Standard 19"rack) / D: 320mm>
Weight	58 kg
Environment Limits:	
Power	24 VDC (Global General 5-pin terminal block, V+, V-, SG, GND, SHD)
Input Power Current	30A
Operating Temperature	-20°C to 70°C (-4°F to 158°F)
Vibration	Operating, 5 Grms, 5-500 Hz, 3 axes (w/ CFAST or SSD) Operating, 0.5 Grms, 5-500 Hz, 3 axes (w/ HDD)
Environment Temp	-40 ~ 80 °C
Relative Humidity	5 to 95% (non-condensing)

Serial Port, I/O	
Port	Professional IP66 VD Port * 2 with redundant function Professional IP66 Camera Port * 2 with redundant function Professional IP 66 Light sensor / RFID Reader Port *1 Professional IP66 Maintain Ethernet & Power-In Port* 1 Professional IP66 KVM Port *2 Professional IP66 RJ45 Port * 7 Professional IP66 RJ45/ Fiber Port * 1
Ethernet:	
Speed	1,000 Mbps