
| D464 | A.C. refriencest successes conserved | | |
|---------|--|--|--|
| B161 | AC refrigerant pressure sensor | | |
| B138 | Accelerator pedal position (APP) sensor | | |
| G1 | Alternator | | |
| 31 | Battery - | | |
| 30 | Battery + | | |
| S258 | Clutch pedal position (CPP) switch | | |
| CAN-H | Controller area network (data bus) high | | |
| CAN-L | Controller area network (data bus) low | | |
| B54 | Crankshaft position (CKP) sensor | | |
| S101 | Cruise control brake pedal switch | | |
| X1 | Data link connector (DLC) | | |
| A35 | Engine control module (ECM) | | |
| M6 | Engine coolant blower motor | | |
| K12-I | Engine coolant blower motor relay 1 | | |
| K12-II | Engine coolant blower motor relay 2 | | |
| K12-III | Engine coolant blower motor relay 3 | | |
| R46 | Engine coolant blower motor resistor | | |
| R46-I | Engine coolant blower motor resistor 1 | | |
| R46-II | Engine coolant blower motor resistor 2 | | |
| B24 | Engine coolant temperature (ECT) sensor | | |
| S186 | Engine coolant temperature (ECT) switch | | |
| H63 | Engine malfunction indicator lamp (MIL) | | |
| Y104 | Evaporative emission (EVAP) canister purge valve | | |
| M12 | Fuel pump (FP) | | |
| F | Fuse | | |
| X28-IV | Fuse box/relay plate , fascia 2 | | |
| X28-II | Fuse box/relay plate, engine bay 1 | | |
| X28-III | Fuse box/relay plate, engine bay 2 | | |
| X28-I | Fuse box/relay plate, fascia 1 | | |
| B72-I | Heated oxygen sensor (HO2S) 1 | | |
| B72-II | Heated oxygen sensor (HO2S) 2 | | |
| T1 | Ignition coil | | |
| 15 | Ignition switch - ignition ON | | |
| Y3 | Injector | | |
| A5 | Instrument panel | | |
| A75 | Instrumentation control module | | |
| B25 | | | |
| B69 | Intake air temperature (IAT) sensor Knock sensor (KS) | | |
| B83 | Manifold absolute pressure (MAP) sensor | | |
| A11-I | Multifunction control module 1 | | |
| | Multifunction control module 2 | | |
| A11-II | | | |
| S231 | Power steering pressure (PSP) switch | | |
| X92-I | Shorting link connector 1 | | |
| P7 | Tachometer Throttle control unit | | |
| A177 | Throttle control unit | | |
| M89 | Throttle motor | | |
| B169 | Throttle motor position sensor | | |
| A57 | Transmission control module (TCM) | | |
| VAN | Vehicle area network (data bus) | | |
| B33 | Vehicle speed sensor (VSS) | | |
| P9 | Vehicle speedometer | | |

Manufacturer: Citroen
Engine code: NFU (TU5JP4)
Tuned for: R-Cat

Model: Xsara II 1,6 16V Output: 80 (110) 5800 Year: 2000-06 © Autodata Limited 2010 **Valid forever.** 27.10.2020

V8 500- /Autodata

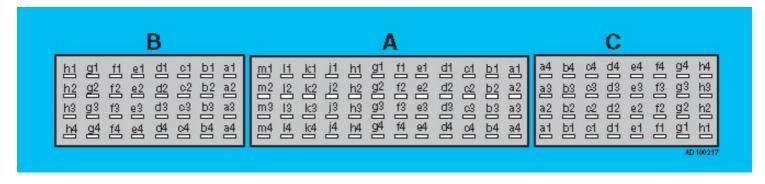


| bl = blue | br = brown | el = cream | ge = yellow |
|-------------------|------------------|--------------------------|--------------|
| gn = green | gr = grey | nf = neutral | og = orange |
| rs = pink | rt = red | sw = black | vi = violet |
| ws = white | hbl = light blue | hgn = light green | rbr = maroon |
| x = braided cable | y = high tension | z = non-cable connection | |


NOTE: In certain diagrams (Citroen, Peugeot & Renault), colour codes are replaced by numbers which are used to identify a particular cable and not the colour. In this instance, the cables will be numbered at each end close to the harness connector.

 Manufacturer: Citroen
 Model: Xsara II 1,6 16V

 Engine code: NFU (TU5JP4)
 Output: 80 (110) 5800

 Tuned for: R-Cat
 Year: 2000-06

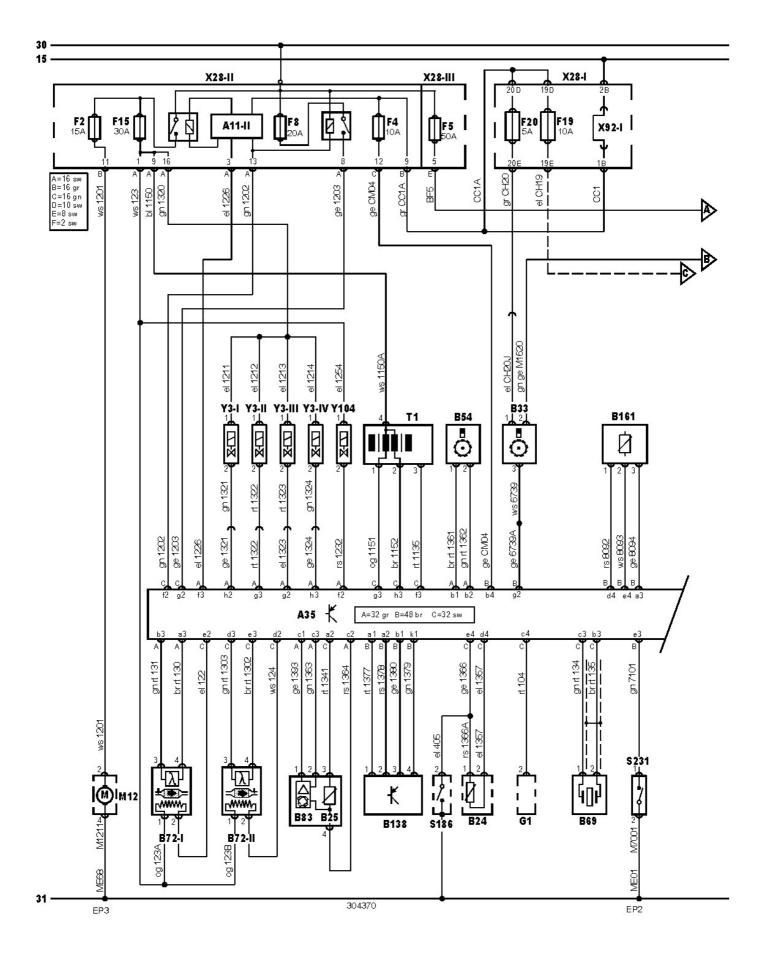

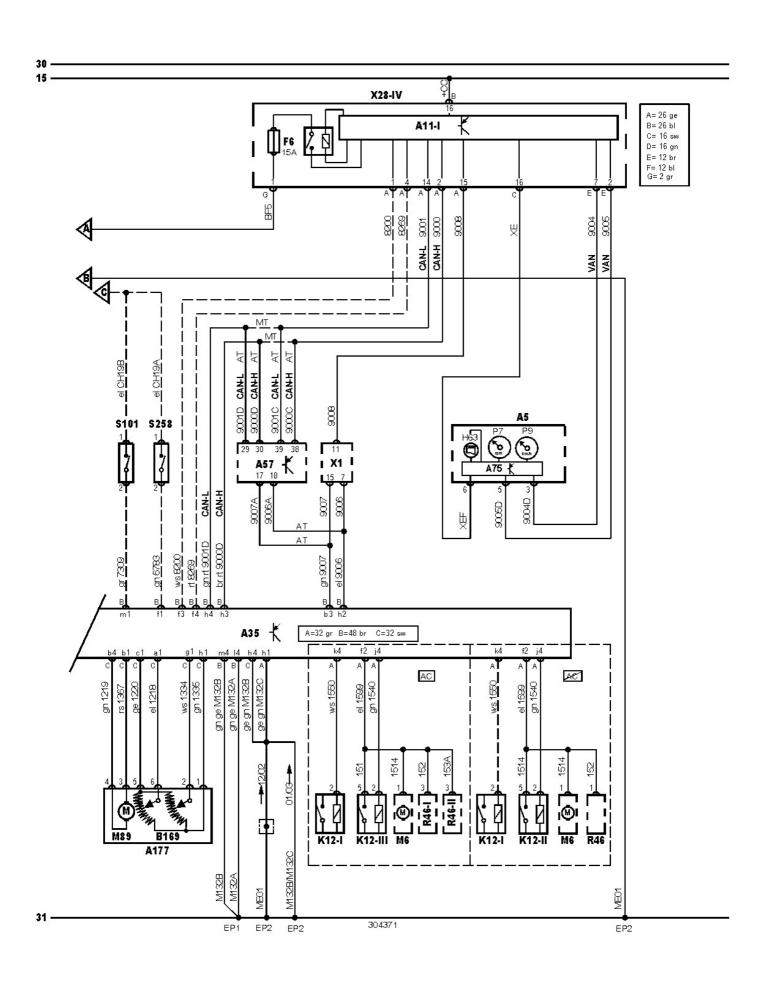

V8 500- /Autodata