



● Probe 2: [0.20, -0.18, -0.30] ● Probe 7: [0.35, 0.00, 0.50] -*- Ideal command response

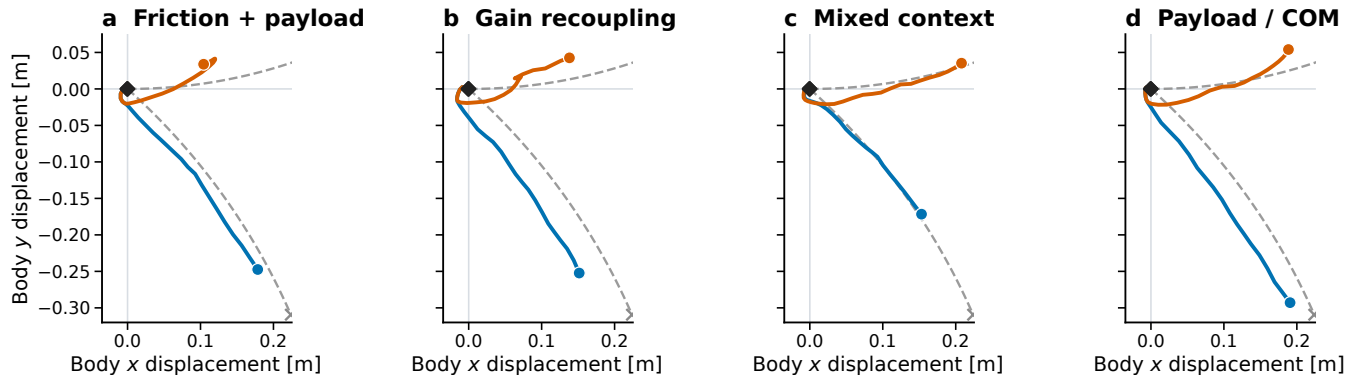

e Exact registered pre → post shifts

μ_s	0.92 → 0.28	0.84 → 0.84	0.80 → 0.42	0.72 → 0.72
μ_d	0.74 → 0.22	0.66 → 0.66	0.62 → 0.31	0.55 → 0.55
Payload [kg]	0.0 → 2.8	0.0 → 0.0	0.0 → 2.2	0.0 → 3.0
COM [mm]	0 → 28	0 → 0	0 → -22	0 → -32
Cmd map	high → low	high → low	high → mixed	high → low
	Fric.+load	Gain	Mixed	Load/COM

f Early recovery



g Absolute gate

