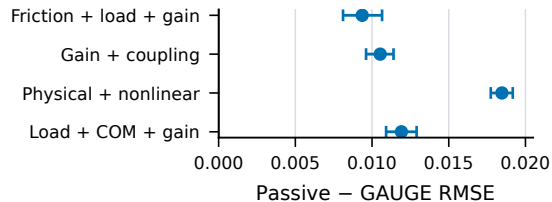
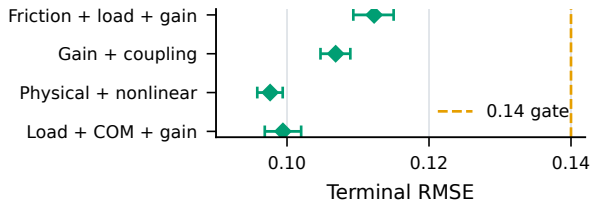


a Registered shift specification

μ_s	0.92 → 0.28	0.84 → 0.84	0.80 → 0.42	0.72 → 0.72
μ_d	0.74 → 0.22	0.66 → 0.66	0.62 → 0.31	0.55 → 0.55
Payload [kg]	0.0 → 2.8	0.0 → 0.0	0.0 → 2.2	0.0 → 3.0
COM [mm]	0 → 28	0 → 0	0 → -22	0 → -32
Gain range (pre)	1.05--1.15	1.05--1.15	1.05--1.15	1.05--1.15
Gain range (post)	.65--.72	.65--.72	.65--.72	.65--.72
$ c_{ij} $ bound (pre)	≤ .04	≤ .04	≤ .04	≤ .04
$ c_{ij} $ bound (post)	≤ .12	≤ .12	≤ .12	≤ .12
	Fric.+ load+gain	Gain+ coupling	Physical+ nonlinear	Load+ COM+gain

b Early recovery**c Validated terminal accuracy****d Recovery-selector ablation**