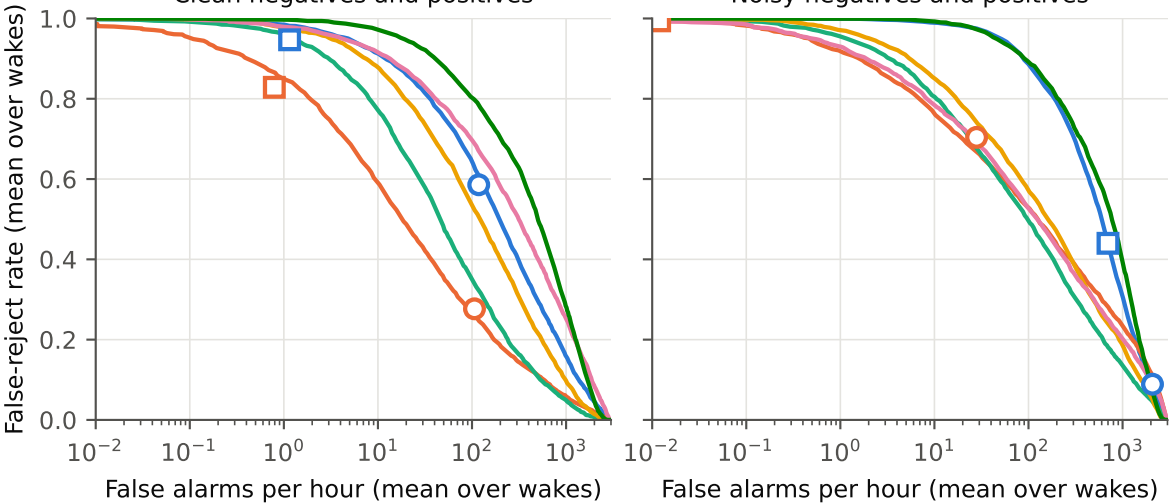
Clean negatives and positives
Noisy negatives and positives
False-reject rate (mean over wakes)
1.0
0.8
0.6
0.4
0.2
0.0
10^{-2}
10^{-1}
10^{0}
10^{1}
10^{2}
10^{3}
False alarms per hour (mean over wakes)
Deployed (noise-augmented templates)
Clean templates
Embedding only
MFCC + DTW
Prototype
No normaliser
deployed calibration
bank calibration, 1 FA/h target