



LITE



TYPICAL APPLICATIONS Coffee machines

FUNCTIONS ■ SPST, illuminated or not
■ DPST illuminated

CYCLE No. 50.000

CUT OUT 19x13 mm rear panel

AMBIENT TEMPERATURE 125 °C

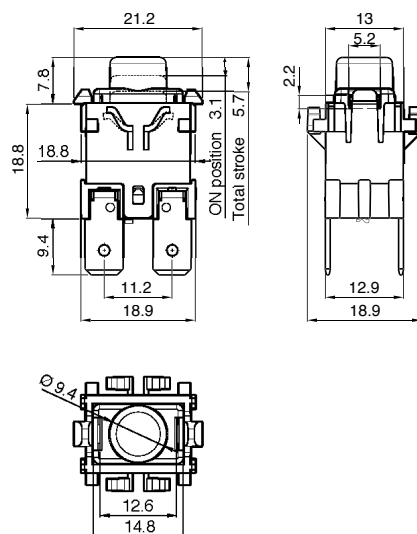
GWT 850 °C

GWT NO FLAME (<2sec) 750 °C

L I T E ?

DRAWING

1



?

TERMINAL

1 Vertical terminal
6.3x0.8




2 Vertical terminal
4.8x0.8



A Horizontal terminal
6.3x0.8





L	I	T	E	DRAWING	TERMINAL	AESTHETIC	FUNCTION	RATING	LENS COLOUR	LAMP COLOUR	0	0	0
---	---	---	---	---------	----------	-----------	----------	--------	-------------	-------------	---	---	---

?	?	?	?	?	0	0	0
---	---	---	---	---	---	---	---





AESTHETIC

FUNCTION

RATING

LENS COLOUR

LAMP COLOUR

<div>A</div> 	<div>1</div>  <div>5</div>  <div>8</div> 	<div>C</div> <div>16 (6) A / 250 VAC</div> <div>12 (10) A / 250 VAC</div> <div>8 (8) A / 250 VAC - 5E4</div> <div>T125/55 °C</div> <div>EN 61058</div> <div>16 A - 125 / 250 VAC</div> <div>1/2 HP - 125 VAC</div> <div>3/4 HP - 250 VAC</div> <div>T100 °C</div> <div>UL 1054</div>	<div>L</div> <div>colourless</div>	<div>O</div> <div>no lamp</div> <div>G</div> <div>red</div> <div>E</div> <div>green</div>
--	---	--	------------------------------------	---

ACCESSORIES



LITET1N0000



LITET1M0000



LITET1E0000



LITET1G0000

