



TECNO


| | |
|--------------------------------|---|
| TYPICAL APPLICATIONS | Cleaning and outdoor, small appliances, chainsaw, gardening |
| FUNCTIONS | ■ SPST, momentary or not |
| CYCLE No. | 50.000 |
| CUT OUT | 19x13 mm |
| AMBIENT TEMPERATURE | 125 °C |
| GWT | 850 °C |
| GWT NO FLAME (<2sec) | 750 °C on demand |




T E C N O ?

DRAWING

7

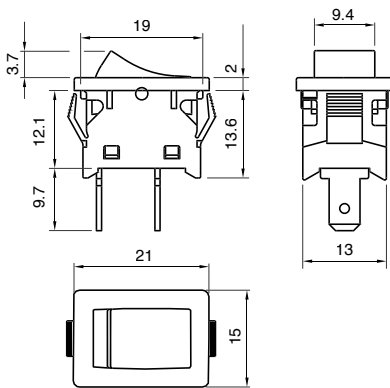


1

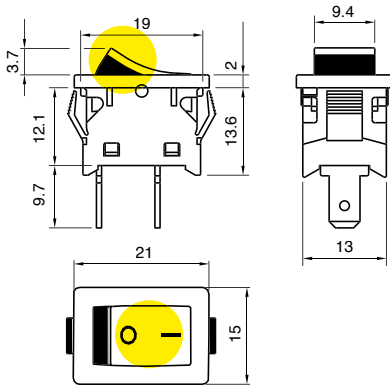


?

TERMINAL

1




2



?


TERMINAL

1



T E C N O 4

DRAWING

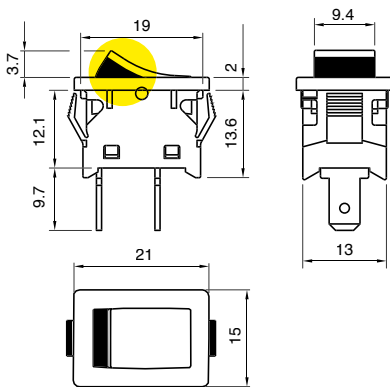

?


TERMINAL

1



NOTES

Water splash proof body



| Z | Y | X |
|--------------|------|-------------|
| 0,75 ... 3,5 | 13,0 | $+0,2$ 0 |
| | | 19,0 |
| | | $+0,2$ 0 |

| T | E | C | N | O | DRAWING | TERMINAL | FUNCTION | RATING | BODY COLOUR | ROCKER COLOUR | MARKING COLOUR | MARKING |
|---|---|---|---|---|---------|----------|----------|--------|-------------|---------------|----------------|---------|
| | | | | | | | | | | | | |

| | | | | | | | | |
|----------|--------|------------|---------------|----------------|---------|---|---|---|
| ? | ? | ? | ? | ? | ? | 0 | 0 | 0 |
| FUNCTION | RATING | BODY COLOR | ROCKER COLOUR | MARKING COLOUR | MARKING | | | |

| | | | | | |
|--|--|---|---|---|---|
| 1 4 Drawing 7 A Drawing 7 | 3 10 (4) A / 250 VAC 10 / 100 A / 250 VAC 6 (4) A / 250 VAC - 5E4 T125/55 °C EN 61058 15 A / 125 VAC T65 °C UL 1054 | 1 black X custom | 1 black X custom | Drawing 7 0 none 1 black 2 white X custom Drawing 1 Side and marking 9 red | 0 1 3 X Drawing 1 from mould 1 |
|--|--|---|---|---|---|

| T | E | C | N | O | 4 | TERMINAL | FUNCTION | RATING | BODY COLOUR | ROCKER COLOUR | MARKING COLOUR | MARKING |
|---|---|---|---|---|---|----------|----------|--------|-------------|---------------|----------------|---------|
| | | | | | | | | | | | | |

| | | | | | | | |
|----------|--------|------------|---------------|----------------|---------|---|---|
| ? | ? | ? | ? | ? | ? | 0 | 0 |
| FUNCTION | RATING | BODY COLOR | ROCKER COLOUR | MARKING COLOUR | MARKING | | |

| | | | | | |
|--------------|--|---|---|---|--|
| 1 | 3 10 (4) A / 250 VAC 10 / 100 A / 250 VAC 6 (4) A / 250 VAC - 5E4 T125/55 °C EN 61058 15 A / 125 VAC T65 °C UL 1054 | 1 black X custom | 19 Top black Side red XX custom | 0 none 2 white X custom | 0 1 3 X |
|--------------|--|---|---|---|--|