

SX83

TYPICAL APPLICATIONS	Small appliances
FUNCTIONS	 Double SPST, illuminated or not Double SPDT SPST, illuminated or not + Indicator light SPST + SPCO
CYCLE No.	50.000
CUT OUT	30x22 mm
AMBIENT TEMPERATURE	125 ℃
GWT	850 °C
GWT NO FLAME (<2sec)	750 °C on demand







TERMINAL








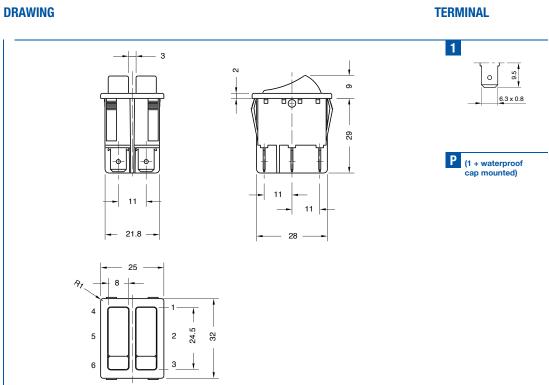








Q (3 + waterproof cap mounted)






0

0

?





			/ 🐷	TERMINAL	FUNCTION	RATING	BODY COLOUR	ROCKER COLOUR L	ROCKER COLOUR R	MARKING COLOUR	MARKING L	MARKING R	LENS COLOUR		
S	X	8	3											0	0

FUNCTION

1		
	4 • /	1 • /
	5	. /
	5 •	2 🔞













RATING

8 Function 1 20 (2) A / 250 VAC 16 (8) A / 250 VAC 10 (4) A / 400 VAC 10 (6) A / 250 VAC - 5E4 T125/55 °C

20 A / 125 VAC 16 A / 250 VAC 3/4 HP - 125 / 250 VAC T105 °C UL 1054

EN 61058

Function 3 16 (8) A / 250 VAC 10 (4) A / 400 VAC 10 (6) A / 250 VAC - 5E4 T125/55 °C EN 61058

20 A / 125 VAC 16 A / 250 VAC 3/4 HP - 125 / 250 VAC T105 °C UL 1054

Function W - 6 20 (2) A / 250 VAC 16 (8) A / 250 VAC 10 (6) A / 250 VAC - 5E4 T125/55 °C EN 61058

20 A / 125 VAC 16 A / 250 VAC 3/4 HP - 125 / 250 VAC T105 °C UL 1054

Α

Function R

20 (2) A / 250 VAC 16 (8) A / 250 VAC 10 (6) A / 250 VAC - 5E4 T125/55 °C EN 61058

В

Function 6 - F

20 (2) A / 250 VAC 16 (8) A / 250 VAC 10 (6) A / 250 VAC - 5E4 T125/55 °C EN 61058

16 A / 250 VAC 3/4 HP - 250 VAC T105 °C UL 1054

D

Function K

16 (6) A / 250 VAC 10 (4) A / 250 VAC - 5E4 T125/55 °C EN 61058















red







?









MARKING

?

















