



TYPICAL APPLICATIONS	Fan heaters, small ovens, cleaners
FUNCTIONS	 30° steps (up to 6 positions), SP or DP
CYCLE No.	10.000 (50.000 on demand)
CUT OUT	28 mm interaxes screws
AMBIENT TEMPERATURE	150 ℃
GWT	850 °C
GWT NO FLAME (<2sec)	750 °C on demand















DRAWING

TERMINAL

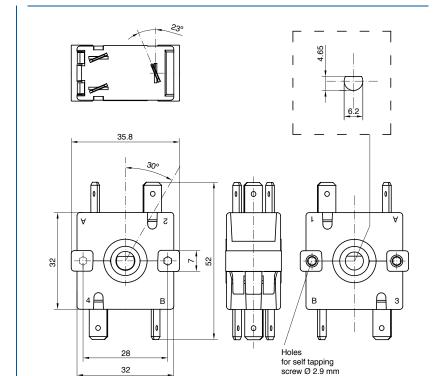








0





FU

G4

G6

GE


H2


^D_B • • •


• •


• •


FUNCTION



























RATING




13 A / 125 VAC T65 °C UL 1054













Shaft also available separately R023000



Shaft also available separately R022000



Shaft also available separately R104000