



TYPICAL APPLICATIONS	Coffee machines, washing machine					
FUNCTIONS	<ul><li>SPST, momentary or not</li><li>DPST, momentary or not</li><li>DPST, illuminated or not</li></ul>					
CYCLE No.	50.000					
CUT OUT	ø 20 mm					
AMBIENT TEMPERATURE	125 ℃					
GWT	850 °C					
GWT NO FLAME (<2sec)	750 °C on demand					




1

R F I T ?

**DRAWING** 



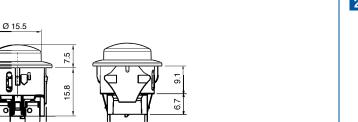




18.6
















				DRAWING	TERMINAL	FUNCTION	RATING	BODY COLOUR	BUTTON COLOUR					
R	F	1	Т							0	0	0	0	0

?

## FUNCTION RATING

1.1 1.2









·

C

16 (6) A / 250 VAC 12 (10) A / 250 VAC 8 (8) A / 250 VAC - 5E4 T125 / 55 °C EN 61058

16 A - 125 / 250 VAC 1 / 2 HP - 125 VAC 3 / 4 HP - 250 VAC T65 °C (T100 °C on demand) UL 1054

BODY COLOUR

## BUTTON COLOUR













