

SP63

TYPICAL APPLICATIONS	Vacuum and steam cleaners
FUNCTIONS	SPST, momentary or notSPST, illuminated or notDPST illuminated
CYCLE No.	50.000
CUT OUT	27x22 mm
AMBIENT TEMPERATURE	120 °C
GWT	850 °C
GWT NO FLAME (<2sec)	750 °C on demand



DRAWING

S P 6 3


?


TERMINAL





















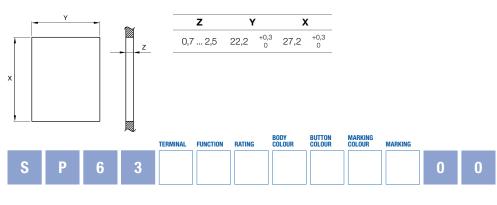




























RATING

C
16 (6) A / 250 VAC 10 (4) A / 250 VAC - 5E4 10 (4) A / 400 VAC T120 °C
EN 61058

BODY COLOUR























No lens

BUTTON COLOUR MARKING COLOUR MARKING















ACCESSORIES







SP63T1H0000