



SP60



TYPICAL APPLICATIONS Vacuum and steam cleaners

FUNCTIONS

- SPST, momentary or not
- SPST, illuminated or not
- DPST, illuminated or not

CYCLE No. 50.000

CUT OUT ø 25 mm

AMBIENT TEMPERATURE 120 °C

GWT 850 °C

GWT NO FLAME (<2sec) 750 °C on demand

S P 6 0



?

DRAWING


TERMINAL






WATERPROOF CAP






1




A






2




4




D



5



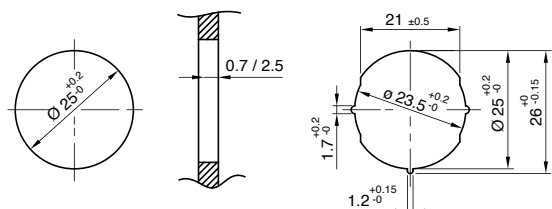

S	P	6	0	TERMINAL	FUNCTION	RATING	BODY COLOUR	BUTTON COLOUR	MARKING COLOUR	MARKING	0	0
---	---	---	---	----------	----------	--------	-------------	---------------	----------------	---------	---	---

?	?	?	?	?	?	?
FUNCTION	RATING	BODY COLOUR	BUTTON COLOUR	MARKING COLOUR	MARKING	

1 	7 16 (6) A / 250 VAC 10 (4) 250 VAC - 5E4 10 (4) A / 400 VAC T120/55 °C EN 61058 16 A - 125 / 250 VAC 1/4 HP / 125 VAC 1/2 HP / 250 VAC T95 °C UL 1054	1 black 2 white X ? custom	M white N black R red ILLUMINATED	0 none 1 black 2 white X ? custom	0 7 D E K X ?
2 					
4 	C 16 (6) A / 250 VAC 10 (4) 250 VAC - 5E4 10 (4) A / 400 VAC T120/55 °C EN 61058		G red H orange E green L white		
6 			X ? custom No lens 0 		
8 					

ACCESSORIES



SP60T1N0000



SP60T1M0000



SP60T1G0000



SP60T1E0000

Other colours available on demand.