



# SXLR






S X L R


DRAWING

?


TERMINAL

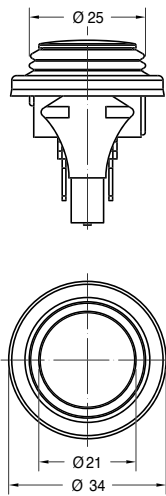

2



TYPICAL APPLICATIONS	Steam cleaners
FUNCTIONS	<ul style="list-style-type: none"><li>■ SPST, illuminated</li><li>■ DPST, illuminated or not</li></ul>
CYCLE No.	50.000
CUT OUT	ø 25 mm
AMBIENT TEMPERATURE	125 °C
GWT	850 °C
GWT NO FLAME (<2sec)	750 °C on demand

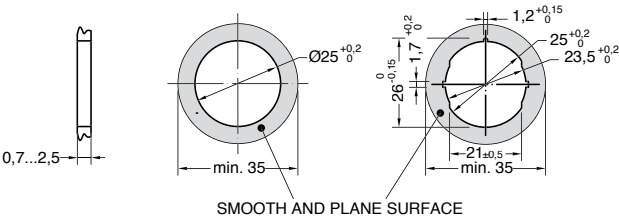

S	X	L	R	TERMINAL	FUNCTION	RATING	RUBBER COLOUR	BUTTON COLOUR	MARKING COLOUR	MARKING	0	0	0
---	---	---	---	----------	----------	--------	---------------	---------------	----------------	---------	---	---	---

?	?	?	?	?	?	?	0	0	0
---	---	---	---	---	---	---	---	---	---

FUNCTION	RATING	RUBBER COLOUR	BUTTON COLOUR	MARKING COLOUR	MARKING
----------	--------	---------------	---------------	----------------	---------

<div>2</div> <div></div>	<div>C</div> <div>16 (4) A / 250 VAC 10 (2) A / 250 VAC - 5E4 T125 °C EN 61058</div> <div>12 A - 125 / 250 VAC 1/4 HP - 125 VAC 1/2 HP - 250 VAC T100 °C UL 1054 IP65</div>	<div>1</div> <div>black</div>	<div>M</div> <div>white</div>	<div>0</div> <div>none</div>	<div>0</div> <div></div>
<div>6</div> <div></div>		<div>2</div> <div>white</div>	<div>N</div> <div>black</div>	<div>1</div> <div>black</div>	<div>D</div> <div></div>
<div>8</div> <div></div>		<div>X</div> <div>?</div> <div>custom</div>	<div>ILLUMINATED</div>	<div>2</div> <div>white</div>	<div>P</div> <div></div>
			<div>G</div> <div>red</div>	<div>X</div> <div>?</div> <div>custom</div>	<div>R</div> <div></div>
			<div>H</div> <div>orange</div>		<div>X</div> <div>?</div> <div>custom</div>
			<div>E</div> <div>green</div>		
			<div>L</div> <div>white</div>		
			<div>F</div> <div>blue</div>		
			<div>X</div> <div>?</div> <div>custom</div>		<div>X</div> <div></div>