

CN

TYPICAL APPLICATIONS	Hairdryers
FUNCTIONS	■ SPDT (3 positions 0/1/1+2)
CYCLE No.	50.000
CUT OUT	See drawing
AMBIENT TEMPERATURE	85 °C
GWT	850 °C








?






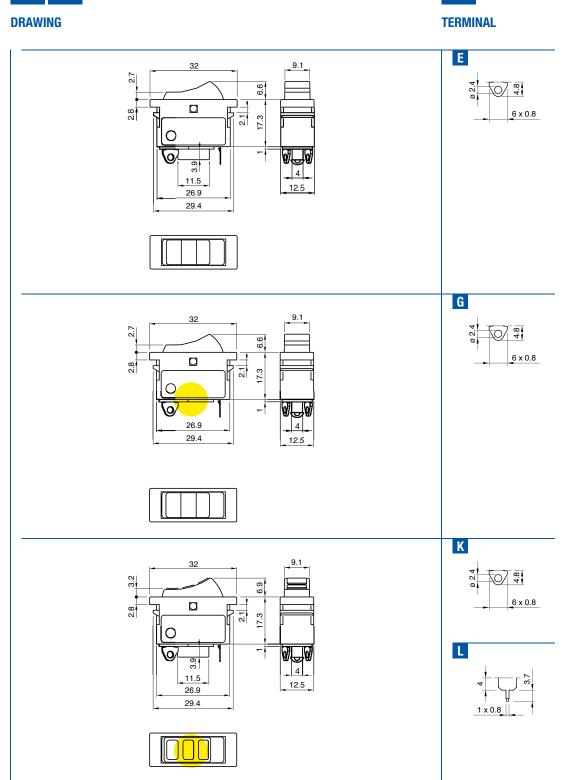





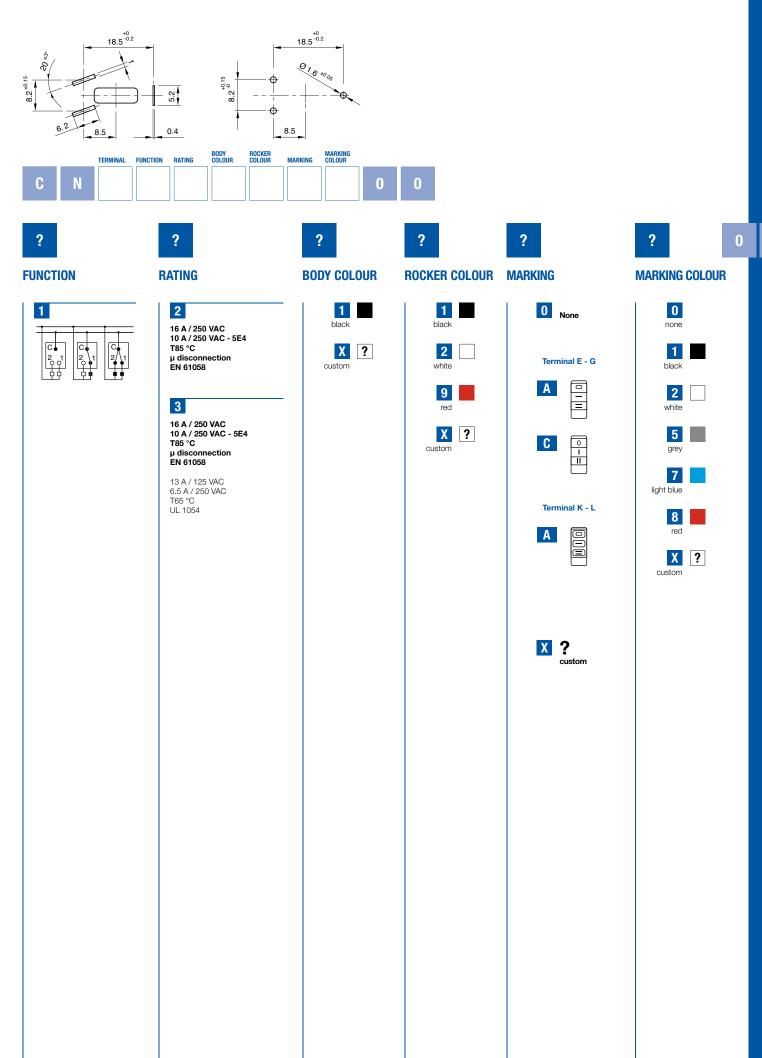



CN

TYPICAL APPLICATIONS	Hairdryers
FUNCTIONS	SPDT (3 positions 0/1/1+2)
CYCLE No.	50.000
CUT OUT	See drawing
AMBIENT TEMPERATURE	85 °C
GWT	850 °C









**DRAWING** 


?

**TERMINAL** 





















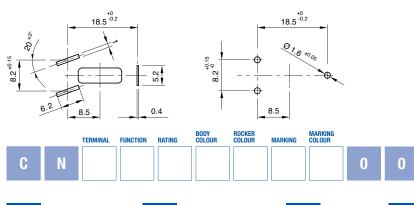

?

## •

?




?

ROCKER COLOUR MARKING



# MARKING COLOUR

## **FUNCTION**



# RATING

2 16 A / 250 VAC 10 A / 250 VAC - 5E4 T85 °C µ disconnection EN 61058

### 3

16 A / 250 VAC 10 A / 250 VAC - 5E4 T85 °C μ disconnection EN 61058

13 A / 125 VAC 6.5 A / 250 VAC T65 °C UL 1054

#### **BODY COLOUR**











1

2



#### Terminal P









## 0

















#### Terminal A - B

