

INDICATOR LIGHTS



on demand

S

X

?

?

SERIES

CUT OUT

17



Custom*




certification not available

21



Custom


5.4 x 9 mm
th 1.5 mm


2.5 x 11.6 mm

FUNCTIONS

- Neon or fluorescent lamp, with or without anti-luminescence resistor
- Incandescent lamp
- LED in AC or DC version

VOLTAGE

From 2 VAC to 400 VAC

MAX TEMPERATURE

From 75 °C to 150 °C

GWT

850 °C

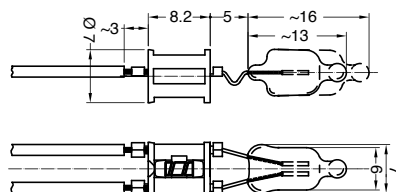
GWT NO FLAME (<2sec)

650 °C


?

DRAWING

1




3

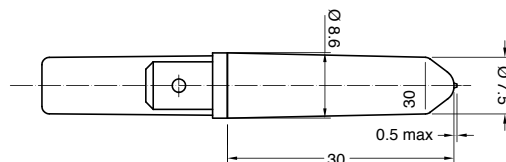


Accessory lenses available separately (pages 172-173)

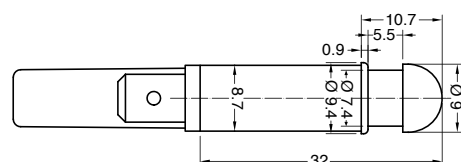
4



P Drawing 4 + round lens




Q Drawing 4 + square lens



Lens available also separately SX21T542...

Lens available also separately SX21T544...

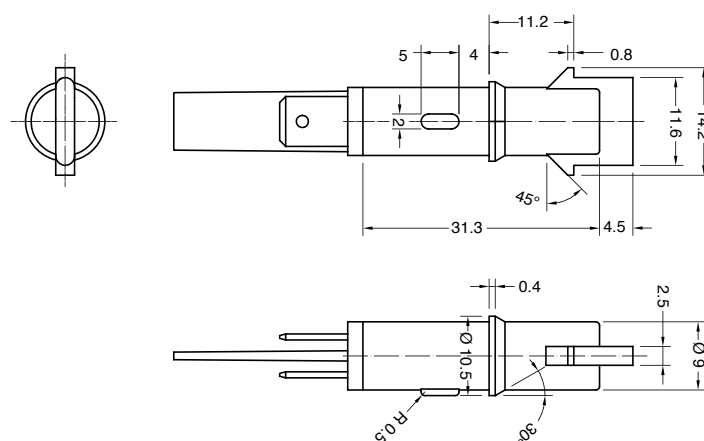8



S	X	SERIES	DRAWING	TERMINAL	FUNCTION	VOLTAGE	TEMP.	COLOUR	WIRES	0	0
---	---	--------	---------	----------	----------	---------	-------	--------	-------	---	---

?	?	?	?	?	?	?	?	?	?	0	0
---	---	---	---	---	---	---	---	---	---	---	---

TERMINAL












FUNCTION

VOLTAGE

TEMPERATURE

COLOUR

WIRES

1 Series 21
 Tabs 6.3 x 0.8

A Series 17
 Wires

C Series 21
 Signal Click

K Series 21
 Wires crimped

R Series 21
 Wires sealed

1 Series 17 - 21

2 Series 21

3 Series 21

5 Series 21

6 Series 21
 Terminal 1

7 Series 21
 Terminal C - K - R

1 Function 5

2 V

2 Function
 3 - 5

12 V

3 Function
 3 - 5

24 V

4 Function
 1 - 2 - 6 - 7

110 V

5 Function
 1 - 2 - 6 - 7

125 V

6 Function
 1 - 2 - 6 - 7

230 V

7 Function
 1 - 2 - 6 - 7

250 V

8 Function
 1 - 2

400 V

VDE or UL certified

?

Available
on demand* UL certification
not available

X

Custom

A

T 75 °C

1 Function 1-2-3

T 90 °C

2 Function 1 - 2

T 120 °C

3 Function 1 - 2

T 150 °C

SERIES 17
NO LENS

0

red light

1

green light

SERIES 21
ILLUMINATED
Drawing 3 - 4

L

white

Drawing P - Q - 8

G

red

H

orange

E

green

L

white

X

custom

000 Terminal 1 - 7 - C

Indicator light without wires

??? Terminal A - K - R

Indicator light with wires

Wires Materials:

- PVC (up to T90 °C)
- SILICONE (up to T200 °C)

Wires Lengths:

from 60 mm to 600 mm
(special version available
up to 1.450 mm)

Wires Ends:

- pre-stripped
(from 5.5 to 18 mm)
- stripped (from 5.5 to 18 mm)
- not stripped
- crimp terminals