



LITE

TYPICAL APPLICATIONS Coffee machines

FUNCTIONS

- SPST, illuminated or not
- DPST illuminated

CYCLE No. 50.000

CUT OUT 19x13 mm rear panel

AMBIENT TEMPERATURE 125 °C

GWT 850 °C

GWT NO FLAME (<2sec) 750 °C


L

I


T

E

?

DRAWING

1

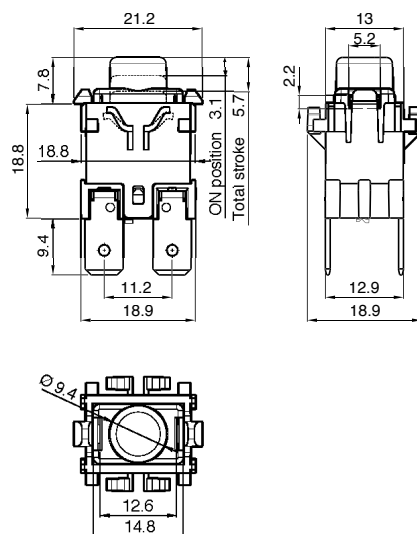


?

TERMINAL

1 Vertical terminal
6.3x0.8

2 Vertical terminal
4.8x0.8

A Horizontal terminal
6.3x0.8

L	I	T	E	DRAWING	TERMINAL	AESTHETIC	FUNCTION	RATING	LENS COLOUR	LAMP COLOUR	0	0	0
---	---	---	---	---------	----------	-----------	----------	--------	-------------	-------------	---	---	---

?	?	?	?	?	0	0	0
AESTHETIC	FUNCTION	RATING	LENS COLOUR	LAMP COLOUR			

A 	1 5 8 	C 16 (6) A / 250 VAC 12 (10) A / 250 VAC 8 (8) A / 250 VAC - 5E4 T125/55 °C EN 61058 16 A - 125 / 250 VAC 1/2 HP - 125 VAC 3/4 HP - 250 VAC T100 °C UL 1054	L colourless	0 no lamp G red E green
--------------	--	--	------------------------	---

ACCESSORIES



LITET1N0000



LITET1M0000



LITET1E0000



LITET1G0000

