



# SXL4



## TYPICAL APPLICATIONS

Coffee machines, washing machines

## FUNCTIONS

- SPST, momentary or not
- SPST, illuminated or not
- DPST, momentary or not
- DPST, illuminated or not

## CYCLE No.

50.000

## CUT OUT

19x13 mm

## AMBIENT TEMPERATURE

125 °C

## GWT

850 °C


## GWT NO FLAME (<2sec)

750 °C


S X L 4 ?

## DRAWING


### 1 FLAT

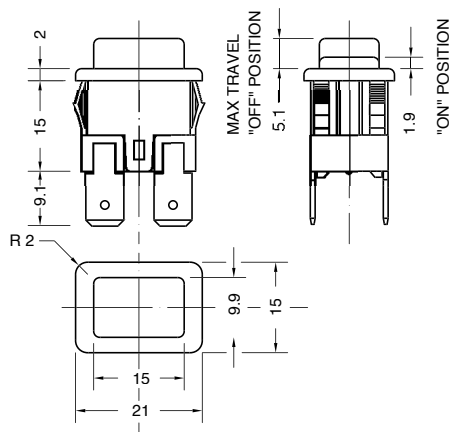

### 2 BOWL

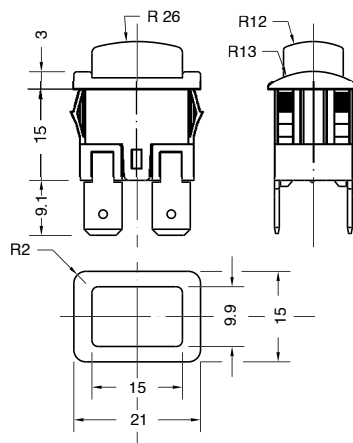

### 3 CUSTOMIZABLE

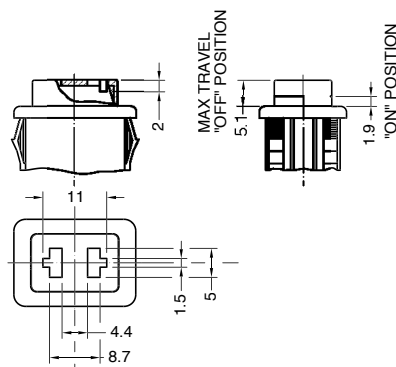

?

## TERMINAL

### 1 Drawing 1 - 2 - 3 Vertical terminal 6.3x0.8



### A Drawing 1 Horizontal terminal 6.3x0.8



### 2 Drawing 1 - 2 - 3 Vertical terminal 4.8x0.8




### B Drawing 1 - 3 Horizontal terminal 4.8x0.8





### 4 Drawing 1 - 2 Vertical PCB terminal





Z	Y	X
0,5-1,2	12,9	$+0,1$ 0
1,2-2,0	12,9	$+0,1$ 0
2,0-3,0	12,9	$+0,1$ 0




DRAWING	TERMINAL	FUNCTION	RATING	BODY COLOUR	BUTTON COLOUR	MARKING COLOUR	MARKING
S	X	L	4				
							0 0 0 W

?	?	?	?	?	?	?	0	0	0	W
FUNCTION	RATING	BODY COLOUR	BUTTON COLOUR	MARKING COLOUR	MARKING					

1



2




4




6 No drawing 3



7



8 No drawing 3



H

16 (4) A / 250 VAC  
10 (6) A / 250 VAC - 5E4  
T125/55 °C  
EN 61058

16 A - 125 / 250 VAC  
3/4 HP - 125 / 250 VAC  
T100 °C  
UL 1054

9

12 (8) A / 250 VAC - 5E4  
T85/55 °C  
EN 61058

1

black

2

white

X

?

custom

Drawing 1 - 3

1

black

2

white

Drawing 1 - 2

M

white

N

black

R

red

0

none

1

black

2

white

X

?

custom

0



1



R



X



ILLUMINATED ☀

G

red

H

orange

E

green

L

white

F

blue

X

?

custom