

# INDICATOR LIGHTS



on demand

S

X

?

?

## SERIES

## CUT OUT

17



Custom\*




certification not available

21



Custom


5.4 x 9 mm  
th 1.5 mm


2.5 x 11.6 mm

## FUNCTIONS

- Neon or fluorescent lamp, with or without anti-luminescence resistor
- Incandescent lamp
- LED in AC or DC version

## VOLTAGE

From 2 VAC to 400 VAC

## MAX TEMPERATURE

From 75 °C to 150 °C

## GWT

850 °C

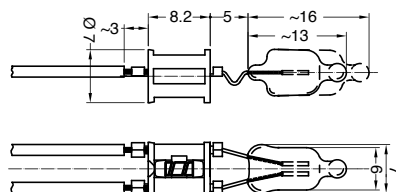
## GWT NO FLAME (<2sec)

650 °C


?

## DRAWING

1




3

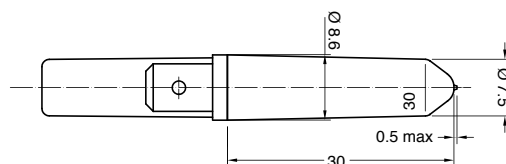


Accessory lenses available separately (pages 172-173)

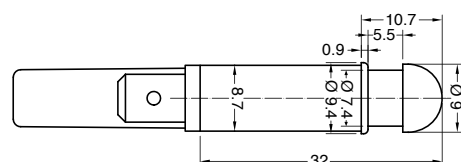
4



P Drawing 4 + round lens




Q Drawing 4 + square lens



Lens available also separately SX21T542...

Lens available also separately SX21T544...

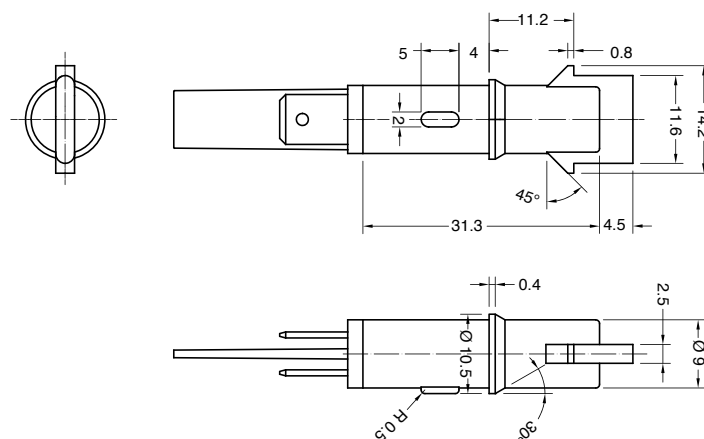8



S	X	SERIES	DRAWING	TERMINAL	FUNCTION	VOLTAGE	TEMP.	COLOUR	WIRES	0	0

?	?	?	?	?	?	?	?	?	?	0	0
---	---	---	---	---	---	---	---	---	---	---	---

## TERMINAL












## FUNCTION

## VOLTAGE

## TEMPERATURE

## COLOUR

## WIRES

**1** Series 21  
 Tabs 6.3 x 0.8

**A** Series 17  
 Wires

**C** Series 21  
 Signal Click

**K** Series 21  
 Wires crimped

**R** Series 21  
 Wires sealed

**1** Series 17 - 21

**2** Series 21

**3** Series 21

**5** Series 21

**6** Series 21  
 Terminal 1

**7** Series 21  
 Terminal C - K - R

**1** Function 5

2 V

**2** Function  
 3 - 5

12 V

**3** Function  
 3 - 5

24 V

**4** Function  
 1 - 2 - 6 - 7

110 V

**5** Function  
 1 - 2 - 6 - 7

125 V

**6** Function  
 1 - 2 - 6 - 7

230 V

**7** Function  
 1 - 2 - 6 - 7

250 V

**8** Function  
 1 - 2

400 V

VDE or UL certified

?

Available  
on demand\* UL certification  
not available

X

Custom

**A**

T 75 °C

**1** Function 1-2-3

T 90 °C

**2** Function 1 - 2

T 120 °C

**3** Function 1 - 2

T 150 °C

**SERIES 17**
**NO LENS**

0

red light

1

green light

**SERIES 21**
**ILLUMINATED**

Drawing 3 - 4

L

white

Drawing P - Q - 8

G

red

H

orange

E

green

L

white

X

custom

**000** Terminal 1 - 7 - C

Indicator light without wires

**???** Terminal A - K - R

Indicator light with wires

Wires Materials:

- PVC (up to T90 °C)
- SILICONE (up to T200 °C)

Wires Lengths:

 from 60 mm to 600 mm  
 (special version available  
 up to 1.450 mm)

Wires Ends:

- pre-stripped  
(from 5.5 to 18 mm)
- stripped (from 5.5 to 18 mm)
- not stripped
- crimp terminals