

CN

TYPICAL APPLICATIONS	Hairdryers
FUNCTIONS	■ SPDT (3 positions 0/1/1+2)
CYCLE No.	50.000
CUT OUT	See drawing
AMBIENT TEMPERATURE	85 °C
GWT	850 °C









?






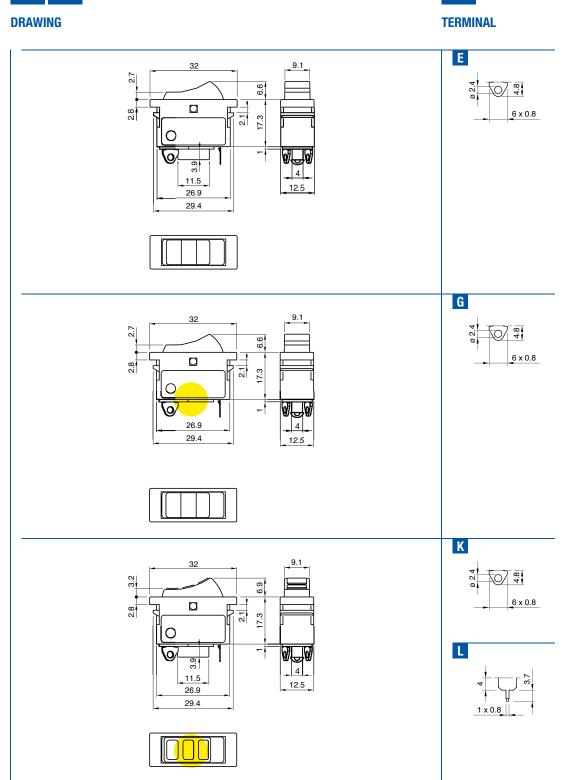







MARKING COLOUR

0

none

1

black

2


white

5

7

light blue

FUNCTION



RATING 2

16 A / 250 VAC 10 A / 250 VAC - 5E4 T85 °C μ disconnection EN 61058

3

16 A / 250 VAC 10 A / 250 VAC - 5E4 T85 °C μ disconnection EN 61058

13 A / 125 VAC 6.5 A / 250 VAC T65 °C UL 1054

BODY COLOUR









ROCKER COLOUR MARKING







0 None







Terminal K - L









8



custom



CN

TYPICAL APPLICATIONS	Hairdryers
FUNCTIONS	SPDT (3 positions 0/1/1+2)
CYCLE No.	50.000
CUT OUT	See drawing
AMBIENT TEMPERATURE	85 °C
GWT	850 °C









DRAWING


?

TERMINAL

























FUNCTION

1

RATING

2

16 A / 250 VAC 10 A / 250 VAC - 5E4 T85 °C μ disconnection EN 61058

3

16 A / 250 VAC 10 A / 250 VAC - 5E4 T85 °C μ disconnection EN 61058

13 A / 125 VAC 6.5 A / 250 VAC T65 °C UL 1054

BODY COLOUR







ROCKER COLOUR MARKING



2 white



X ? custom

Terminal P











MARKING COLOUR











Terminal A - B





Terminal A - B

