




SXL44



S X L 4 4

DRAWING

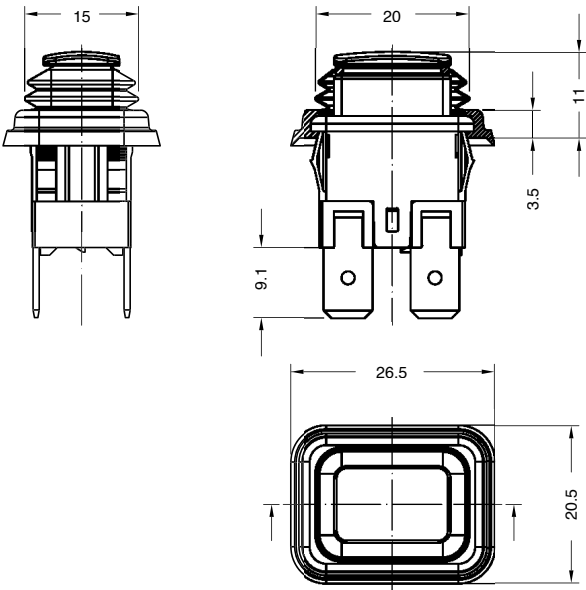

TYPICAL APPLICATIONS Steam cleaners

- FUNCTIONS**
- SPST, momentary or not
 - SPST, illuminated or not
 - DPST, momentary or not
 - DPST, illuminated or not

PROTECTION DEGREE IP 65

CYCLE No. 50.000

CUT OUT 19x13 mm

AMBIENT TEMPERATURE 125 °C


GWT 850 °C

GWT NO FLAME (<2sec) 750 °C on demand


?


TERMINAL

1 Terminal 6.3x0.8



2 Terminal 4.8x0.8



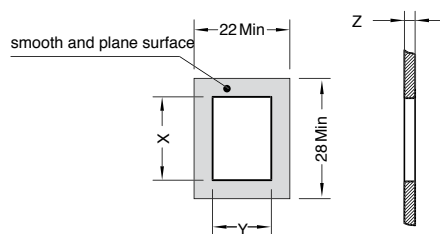

Z	Y	X
0,5 ... 1,2	12,9 ^{+0,1} ₀	19,0 ^{+0,2} ₀
1,2 ... 2,0	12,9 ^{+0,1} ₀	19,3 ^{+0,2} ₀


S	X	L	4	4	TERMINAL	FUNCTION	RATING	RUBBER COLOUR	BUTTON COLOUR	MARKING COLOUR	MARKING	0	0	W
---	---	---	---	---	----------	----------	--------	---------------	---------------	----------------	---------	---	---	---

?	?	?	?	?	?	?	0	0	W
FUNCTION	RATING	RUBBER COLOUR	BUTTON COLOUR	MARKING COLOUR	MARKING				

1



2




4




6




7



8



R



H

16 (4) / 250 VAC
10 (6) / 250 VAC - 5E4
T125 / 55 °C
EN 61058

16A - 3/4 HP
125 / 250 VAC
T 100 °C
UL 1054

1

black

2

white

R

red

M

white

N

black

ILLUMINATED

G

red

H

orange

E

green

L

white

F

blue

X

custom

0

none

1

black

2

white

X

custom

0



1



R



X

