



SXA4





TYPICAL APPLICATIONS	High pressure cleaners, ironing steam generators, industrial machines, cutters
FUNCTIONS	■ DPST, illuminated or not
PROTECTION DEGREE	IP 54, IP 55 for version with silicone
CYCLE No.	50.000
CUT OUT	30x22 mm
AMBIENT TEMPERATURE	125 °C
GWT	850 °C
GWT NO FLAME (<2sec)	750 °C on demand



DRAWING




O-RING

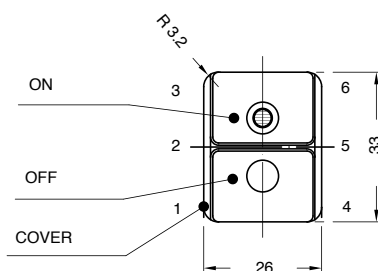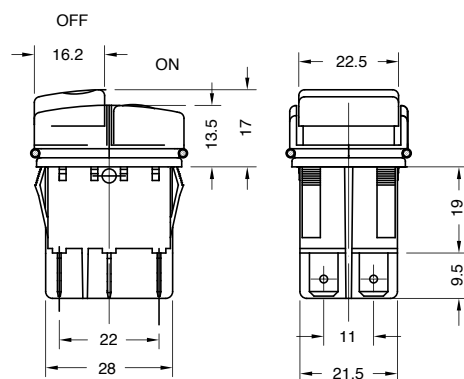


1 Standard


4 With silicone





2



8






GASKET

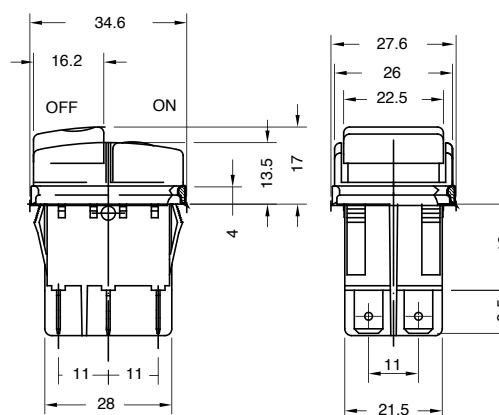


3 Standard

5 With silicone





POS.	DIM.	TOL.
K	1.2	±0.1
H	R.0.6	+0.2
G	R.3.5	-0.1
F	5.5	+0.2
E	0.7/3.5	
D	26.6	±0.1
C	33.6	±0.1
B	22	+0.1
A	30	+0.2

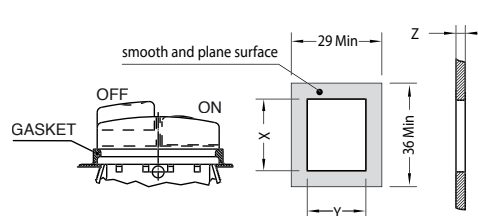

POS.	DIM.	TOL.
Z	0.7/3.5	
Y	22	+0.1
X	30	+0.2

S	X	A	4										0	0
---	---	---	---	--	--	--	--	--	--	--	--	--	---	---

?	?	ON ? OFF ?	?	ON ? OFF ?	?
---	---	------------	---	------------	---

0	0
---	---

RATING **FRAME COLOUR** **BUTTON COLOUR** **MARKING COLOUR** **MARKING** **LENS COLOUR**

8**Function 2**

16 (8) A / 250 VAC
10 (6) A / 250 VAC - 5E4
10 (4) A / 400 VAC
T125/55 °C
EN 61058

16 A - 125 / 250 VAC
3/4 HP - 125 / 250 VAC
T105 °C
UL 1054

Function 8

16 (8) A / 250 VAC
10 (6) A / 250 VAC - 5E4
T125/55 °C
EN 61058

16 A - 125 / 250 VAC
3/4 HP - 125 / 250 VAC
T105 °C
UL 1054

9**Function 2 - 8**

12 (10) A / 250 VAC - 5E4
T85 °C
UL 1054

1

black

X

custom

?**1**

black

X

custom

?**0**

none

2

white

X

custom

?**Marking ON****0****2****3****5****X****Marking OFF****0****1****4****X****0**

none

ILLUMINATED**G**

red

L

white

X

custom

?