



P5


TYPICAL APPLICATIONS	Cooker hoods, hairdryers
FUNCTIONS	■ 5 steps, DP
CYCLE No.	10.000
CUT OUT	Rear panel
AMBIENT TEMPERATURE	125 °C
GWT	850 °C
GWT NO FLAME (<2sec)	750 °C on demand




P

5

DRAWING

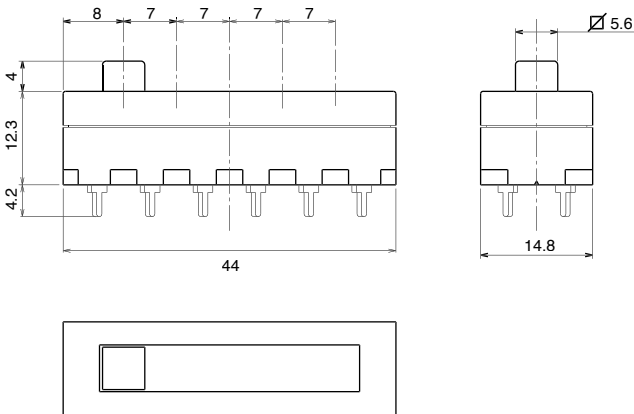

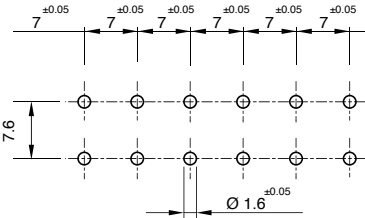

	RATING	FUNCTION	TERMINAL			
P	5			0	0	0

?

RATING

?

FUNCTION

?

TERMINAL

0

0


0

L


10 A / 250 VAC
5 (5) A / 250 VAC
T125/55 °C
EN 61058

13 A / 125 VAC
6.5 A / 250 VAC
T65 °C
UL 1054


A




B



C



0



4

