

SP60

TYPICAL APPLICATIONS	Vacuum and steam cleaners
FUNCTIONS	SPST, momentary or notSPST, illuminated or notDPST, illuminated or not
CYCLE No.	50.000
CUT OUT	ø 25 mm
AMBIENT TEMPERATURE	120 °C
GWT	850 °C
GWT NO FLAME (<2sec)	750 °C on demand





TERMINAL
















WATERPROOF CAP

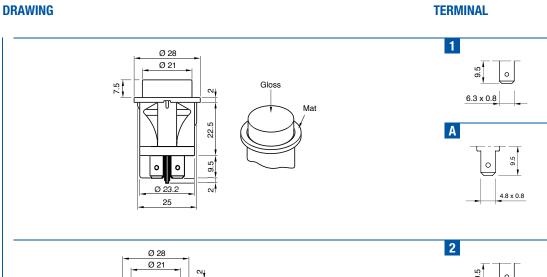

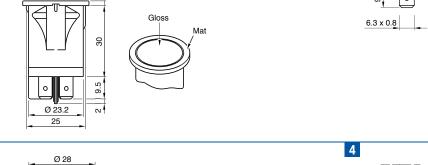

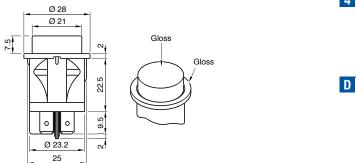






4.8 x 0.8

6.3 x 0.8



0







•

?






?





BUTTON COLOUR MARKING COLOUR MARKING

FUNCTION











RATING



16 A - 125 / 250 VAC 1/4 HP / 125 VAC 1/2 HP / 250 VAC T95 °C UL 1054



BODY COLOUR



























No lens

0



















ACCESSORIES







