



A8

| | |
|----------------------|----------------------------|
| TYPICAL APPLICATIONS | Small appliances |
| FUNCTIONS | ■ DPST, illuminated or not |
| CYCLE No. | 50.000 |
| CUT OUT | 19x13 mm |
| AMBIENT TEMPERATURE | 125° |
| GWT | 850 °C |
| GWT NO FLAME (<2sec) | 750 °C on demand |






A 8

DRAWING

?

TERMINAL

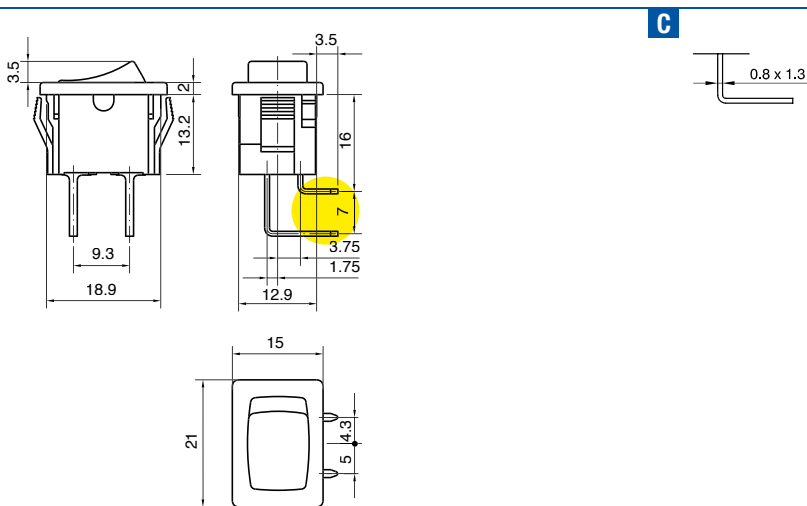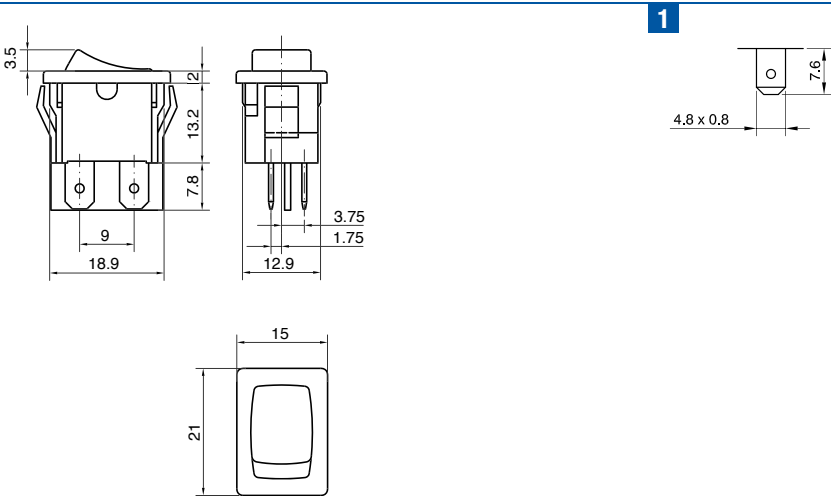



| Z | Y | X |
|--------------|-----------|-----------|
| 0,7 ... 1,25 | 13,0 ±0,1 | 19,0 ±0,2 |
| 1,25 ... 2,0 | 13,0 ±0,1 | 19,3 ±0,2 |
| 2,0 ... 3,0 | 13,0 ±0,1 | 19,6 ±0,2 |

| | | | | | | | | | | | |
|-----------------------------------|-----------------|---------------|------------------------------|--------------------------------|---------------------------------|----------------|----------|----------|----------|----------|----------|
| DRAWING TERMINAL | FUNCTION | RATING | BODY COLOUR | ROCKER COLOUR | MARKING COLOUR | MARKING | A | 8 | 0 | 0 | 0 |
|-----------------------------------|-----------------|---------------|------------------------------|--------------------------------|---------------------------------|----------------|----------|----------|----------|----------|----------|

| | | | | | | | | | |
|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| ? | ? | ? | ? | ? | ? | ? | 0 | 0 | 0 |
|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|

FUNCTION **RATING** **BODY COLOUR** **ROCKER COLOUR** **MARKING COLOUR** **MARKING**

2

8

3
10 (4) A / 250 VAC
6 (4) A / 250 VAC - 5E4
T125 °C
EN 61058

10 A - 125 / 250 VAC
1/3 HP - 125 VAC
1/2 HP - 250 VAC
T65 °C
UL 1054
CSA C22.2

1 black

2 white

X ? custom

1 black

2 white

8 green

ILLUMINATED

G red

H orange

E green

L white

X ? custom

0 none

1 black

2 white

5 grey

7 light blue

8 red

9 orange

X ? custom

0

1

4

6

R

X