



TYPICAL APPLICATIONS	Fan heaters, small ovens, cleaners
FUNCTIONS	 30° steps (up to 6 positions), SP or DP
CYCLE No.	10.000 (50.000 on demand)
CUT OUT	28 mm interaxes screws
AMBIENT TEMPERATURE	150 ℃
GWT	850 °C
GWT NO FLAME (<2sec)	750 °C on demand















DRAWING


TERMINAL

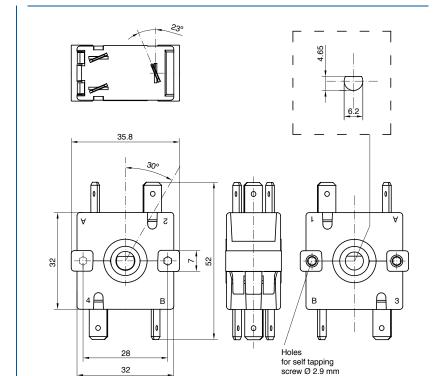












FUNCTION

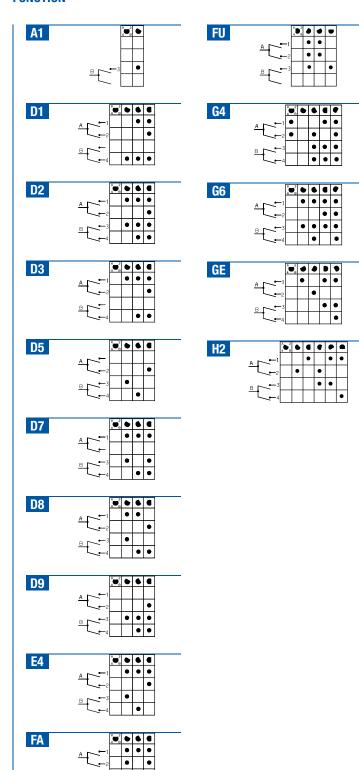


RATING

13 (3) A / 250 VAC 6 (6) A / 250 VAC T150 °C EN 61058


13 A / 125 VAC T65 °C UL 1054




SHAFT




Shaft also available separately R019000



Shaft also available separately R023000





Shaft also available separately R104000