

SX82



TYPICAL APPLICATIONS	Coffee machines, refrigerators, ironing steam generators, medical appliances, vacuum cleaners, power inlet
FUNCTIONS	 SPST, illuminated or not DPST, momentary or not DPST, illuminated or not DPCO DPDT
CYCLE No.	50.000
CUT OUT	30x22 mm
AMBIENT TEMPERATURE	125 ℃
GWT	850 °C
GWT NO FLAME (<2sec)	750 °C on demand



DRAWING
















WATERPROOF CAP

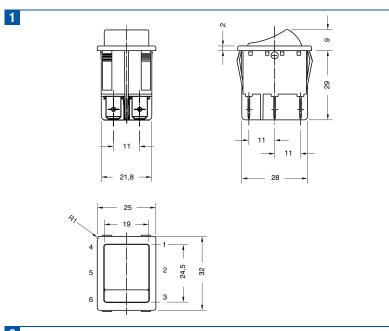

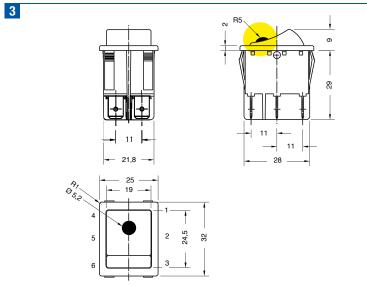


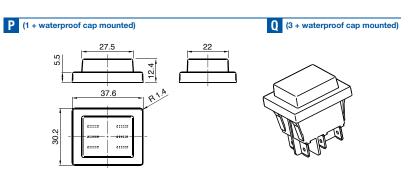



TERMINAL









5

N. 2 screw terminals N. 2 6.3x0.8 terminals





0

0

FUNCTION
















?

DRAWING

TERMINAL

FUNCTION

RATING 8

Function 1 - 2 20 (2) A / 250 VAC * 20 (2) A / 250 VAC 16 (8) A / 250 VAC 10 (6) A / 250 VAC - 5E4 10 (4) A / 400 VAC T125/55 °C EN 61058

20 A / 125 VAC 16 A / 250 VAC 3/4 HP - 125 / 250 VAC T105 °C UL 1054

Function 7 - L 16 (6) A / 250 VAC 10 (4) A / 400 VAC 10 (4) A / 250 VAC - 5E4 T125/55 °C EN 61058

20 A / 125 VAC 16 A / 250 VAC 3/4 HP - 125 / 250 VAC T105 °C UL 1054

Function 8 - W 20 (2) A / 250 VAC * 16 (8) A / 250 VAC 10 (6) A / 250 VAC - 5E4 T125/55 °C EN 61058

20 A / 125 VAC 16 A / 250 VAC 3/4 HP - 125 / 250 VAC T105 °C UL 1054

Function 9

16 (6) A / 250 VAC 10 (4) A / 250 VAC - 5E4 T125/55 °C EN 61058

16 A / 125 VAC 16 A / 250 VAC 3/4 HP - 125 / 250 VAC T105 °C UI 1054

В

Function 8 - W 20 (2) A / 250 VAC * 16 (8) A / 250 VAC 10 (6) A / 250 VAC - 5E4 T125/55 °C EN 61058

16 A / 250 VAC 3/4 HP - 250 VAC T105 °C UL 1054

* Not available for terminal 2

1

2

X ?

white

custom

STANDARD PLASTIC

BODY COLOUR

WATERPROOF CAP VERSION METAL

RATING



1

black

2

white

G

red

Н

Ε

L

white

F

blue

X ?

green

orange

ILLUMINATED *

ROCKER COLOUR

Z

0,7 ... 3,5

0,7 ... 2,5

MARKING COLOUR

22 ±0,1

22

MARKING





Х

30

±0,1 30,2

LENS COLOUR

?

+0,2

0 +0,2

0



white









ı



9















?

0



none





