



RFIT




TYPICAL APPLICATIONS	Coffee machines, washing machine
FUNCTIONS	<ul style="list-style-type: none">■ SPST, momentary or not■ DPST, momentary or not■ DPST, illuminated or not
CYCLE No.	50.000
CUT OUT	ø 20 mm
AMBIENT TEMPERATURE	125 °C
GWT	850 °C
GWT NO FLAME (<2sec)	750 °C on demand

R F I T ?

DRAWING


1

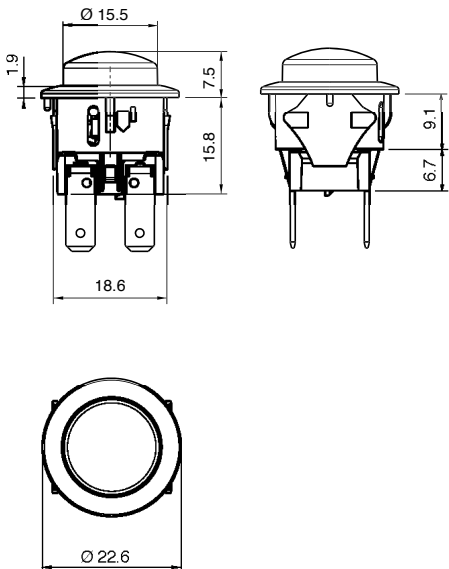


?

TERMINAL

2



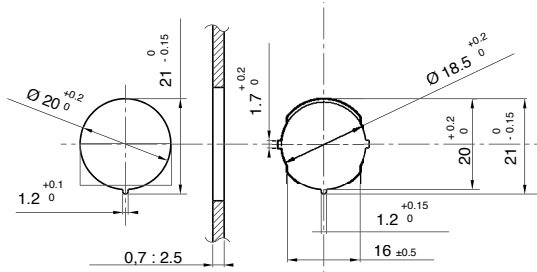

R	F	I	T	DRAWING	TERMINAL	FUNCTION	RATING	BODY COLOUR	BUTTON COLOUR	0	0	0	0	0
---	---	---	---	---------	----------	----------	--------	-------------	---------------	---	---	---	---	---

?	?	?	?	0	0	0	0	0
---	---	---	---	---	---	---	---	---

FUNCTION RATING BODY COLOUR BUTTON COLOUR

1 	C 16 (6) A / 250 VAC 12 (10) A / 250 VAC 8 (8) A / 250 VAC - 5E4 T125 / 55 °C EN 61058	1 black 2 white	N black M white
2 	16 A - 125 / 250 VAC 1 / 2 HP - 125 VAC 3 / 4 HP - 250 VAC T65 °C (T100 °C on demand) UL 1054		ILLUMINATED
4 			E green F blue G red H orange
7 			X custom
8 			