



TECNO


TYPICAL APPLICATIONS	Cleaning and outdoor, small appliances, chainsaw, gardening
FUNCTIONS	■ SPST, momentary or not
CYCLE No.	50.000
CUT OUT	19x13 mm
AMBIENT TEMPERATURE	125 °C
GWT	850 °C
GWT NO FLAME (<2sec)	750 °C on demand




T E C N O ?

DRAWING

7

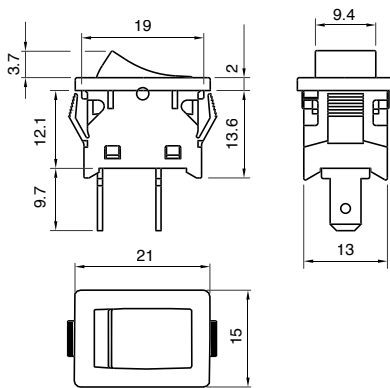


1

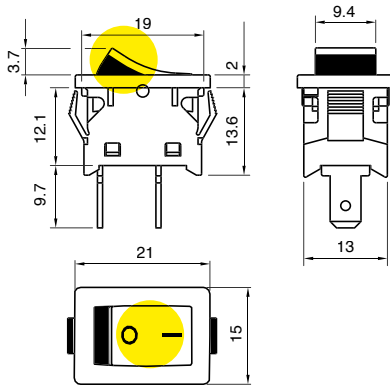


?

TERMINAL

1




2



?


TERMINAL

1



T E C N O 4

DRAWING

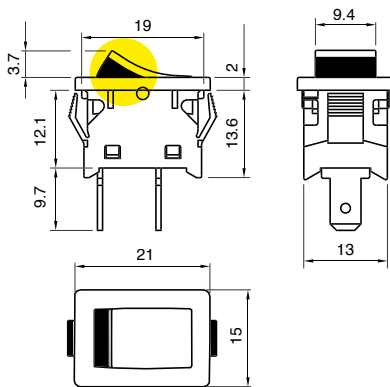

?


TERMINAL

1



NOTES

Water splash proof body



Z	Y	X
0,75 ... 3,5	13,0	$+0,2$ 0
		19,0
		$+0,2$ 0

T	E	C	N	O	DRAWING	TERMINAL	FUNCTION	RATING	BODY COLOUR	ROCKER COLOUR	MARKING COLOUR	MARKING

?	?	?	?	?	?	0	0	0
FUNCTION	RATING	BODY COLOR	ROCKER COLOUR	MARKING COLOUR	MARKING			

1 4 Drawing 7 A Drawing 7 	3 10 (4) A / 250 VAC 10 / 100 A / 250 VAC 6 (4) A / 250 VAC - 5E4 T125/55 °C EN 61058 15 A / 125 VAC T65 °C UL 1054	1 black X custom	1 black X custom	Drawing 7 0 none 1 black 2 white X custom Drawing 1 Side and marking 9 red	0 1 3 ON OFF X Drawing 1 from mould 1
--	--	---	---	---	--

T	E	C	N	O	4	TERMINAL	FUNCTION	RATING	BODY COLOUR	ROCKER COLOUR	MARKING COLOUR	MARKING

?	?	?	?	?	?	?	?	?	0	0
FUNCTION	RATING	BODY COLOR	ROCKER COLOUR	MARKING COLOUR	MARKING					

1 	3 10 (4) A / 250 VAC 10 / 100 A / 250 VAC 6 (4) A / 250 VAC - 5E4 T125/55 °C EN 61058 15 A / 125 VAC T65 °C UL 1054	1 black X custom	19 Top black XX Side red ? custom	0 none 2 white X custom	0 1 3 ON OFF X
--------------	--	---	---	---	---