



CB

TYPICAL APPLICATIONS	Hairdryers
FUNCTIONS	■ 2x SPST (3 positions 0-0/0-1/1-1)
CYCLE No.	50.000
CUT OUT	See drawing
AMBIENT TEMPERATURE	85 °C
GWT	850 °C



C B


DRAWING

?


TERMINAL




K

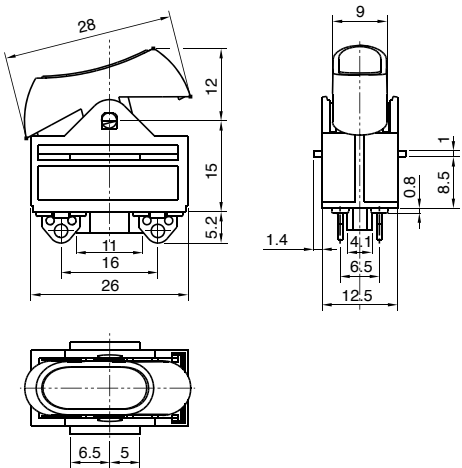


G

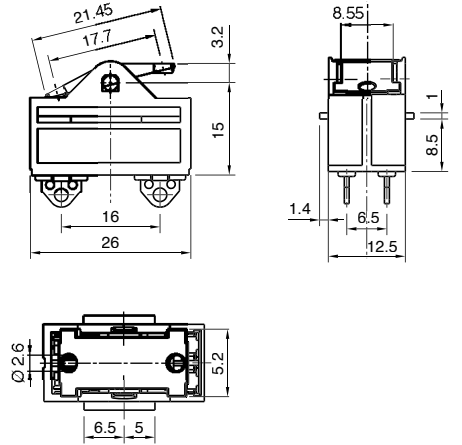

H

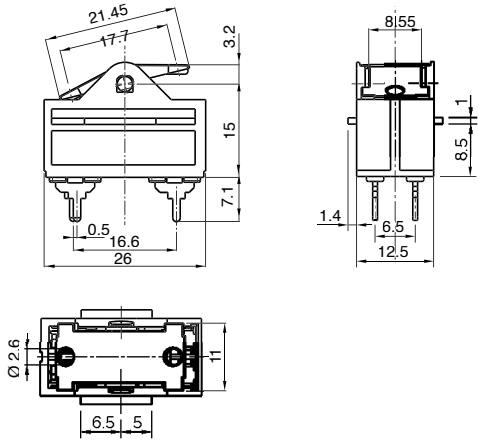

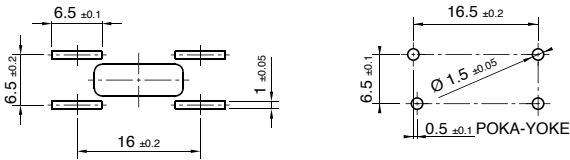

		TERMINAL	FUNCTION	RATING	BODY COLOUR	ROCKER COLOUR	MARKING	MARKING COLOUR		
C	B								0	0

?	?	?	?	?	?	?	0	0
FUNCTION	RATING	BODY COLOUR	ROCKER COLOUR	MARKING	MARKING COLOUR			

1

2

16 A / 250 VAC  
10 A / 250 VAC - 5E4  
T85 °C  
µ disconnection  
EN 61058

16 A / 125 VAC  
T105 °C  
UL 1054

1

brown

Terminal K

0

none

1

black

5

grey

9

red

X

?

custom

Terminal G - H

1

brown

Terminal K

0

A

D

E

X

?

Terminal G - H

0

None

Terminal K

0

none

1

black

2

white

7

light blue

8

red

X

?

custom

Terminal G - H

0

None