


# Lifelong Learning for a Kresling Origami Robot

A Plug-and-play Module for  
Supervised Learning of Target  
Adaptations

E. De Vroey



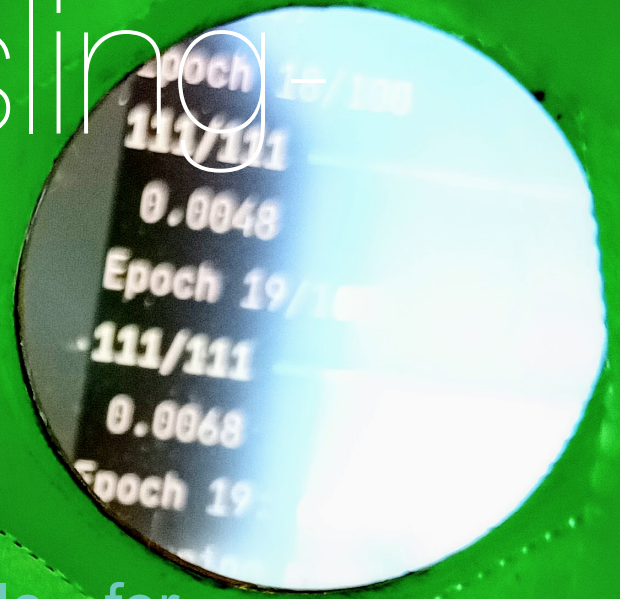

# Lifelong Learning for a Kresling-Origami Robot

**A Plug-and-play Module for Supervised  
Learning of Target Adaptations**

by

E. De Vroey

to obtain the degree of Master of Science  
at the Delft University of Technology,

Student number: 4685156  
Duration: October 2, 2024  
Supervisor: Dr. J. Kober





# Aknowledgments

See Appendix B.

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.



# Contents

|                                                               |            |
|---------------------------------------------------------------|------------|
| <b>Aknowledgments</b>                                         | <b>iii</b> |
| <b>Contents</b>                                               | <b>v</b>   |
| <b>List of Figures</b>                                        | <b>ix</b>  |
| <b>List of Tables</b>                                         | <b>xi</b>  |
| <b>Lifelong Learning for a Kresling-Origami Robot</b>         | <b>1</b>   |
| I Introduction . . . . .                                      | 1          |
| II Related Work. . . . .                                      | 2          |
| II-A Soft Robotics . . . . .                                  | 2          |
| II-B Lifelong Learning . . . . .                              | 2          |
| II-C Kresling Origami . . . . .                               | 2          |
| III Methodology . . . . .                                     | 3          |
| III-A Target Adaptations . . . . .                            | 3          |
| IV Illustrative Problem . . . . .                             | 4          |
| IV-A A case where the controller is too aggressive . . . . .  | 4          |
| IV-B A case where the controller is under-responsive. . . . . | 5          |
| V A Kresling Origami Robot . . . . .                          | 6          |
| V-A Mechanical Details . . . . .                              | 6          |
| V-B Software Implementation . . . . .                         | 7          |
| VI Experimental Setup . . . . .                               | 7          |
| VI-A Sign Conventions and Unit Clarification . . . . .        | 7          |
| VI-B Performance Metrics . . . . .                            | 8          |
| VII Experiments and Results . . . . .                         | 8          |
| VII-A Varying the PID Controller . . . . .                    | 8          |
| VII-B Varying the System Dynamics . . . . .                   | 10         |
| VII-C Crawling Gait . . . . .                                 | 11         |
| VIII Discussion . . . . .                                     | 12         |
| VIII-A Key Insights . . . . .                                 | 13         |
| VIII-B Limitations . . . . .                                  | 13         |
| VIII-C Validity of the Results . . . . .                      | 14         |
| IX Conclusion . . . . .                                       | 15         |
| Appendix A: KOS Design and Template . . . . .                 | 16         |
| Appendix B: Software implementation . . . . .                 | 16         |
| B-A Nominal Control on the Arduino . . . . .                  | 16         |
| B-B Target Adaptation on the External Computer . . . . .      | 16         |
| Appendix C: Extended Test Results. . . . .                    | 17         |
| Appendix D: KOS Reference Recordings . . . . .                | 23         |





# List of Figures

|    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |   |
|----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| 1  | The Kresling-origami robot with target adaptation. <i>Top</i> : The “feet” of the robot grip when dragged backwards, but slide when pushed forward, allowing the robot to move forward, also known as <i>two-anchor crawling</i> (Calisti2017). <i>Bottom</i> : The contraction target is adapted to reduce overshoot and unstable oscillations. . . . .                                                                                                                                                                                                          | 1 |
| 3  | Design map for a KOS with 6 sides reproduced from Masana2019<empty citation> and the corresponding parameters from the folding pattern, with mountain creases in blue and valley creases in dashed red. . . . .                                                                                                                                                                                                                                                                                                                                                   | 3 |
| 4  | Target adaptation. . . . .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 3 |
| 5  | Target adaptation during the training phase . . . . .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 4 |
| 6  | Setup of the mass-spring-damper system in the toy problem with positive directions indicated. . . . .                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 4 |
| 7  | The full minute simulation of the toy problem with an aggressive controller. <i>Top</i> : The system response $x$ and target $x_d + \Delta$ of the adapted controller, alongside the response and target of the unadapted reference controller ( $\Delta = 0$ ). <i>Bottom</i> : The resulting adapted control inputs from the controller receiving $x_d + \Delta$ alongside the unaltered reference control inputs. During the first 15s (3 targets) the adapter has not received updates yet, and the signal is thus identical to the reference signal. . . . . | 5 |
| 8  | A close-up of the second to last target in the one-minute simulation. The effects of the adapter can be more clearly observed: The overshoot (seen in the reference signal) is countered by bringing the target closer to the current state. . . . .                                                                                                                                                                                                                                                                                                              | 5 |
| 9  | The full minute simulation of the system with an under-responsive controller. <i>Top</i> : The system response and target of the adapted controller, alongside the response and target of the unadapted reference controller. <i>Bottom</i> : The resulting adapted control inputs from the controller receiving the altered target alongside the unaltered reference control inputs. . . . .                                                                                                                                                                     | 6 |
| 10 | A close-up of the second to last target in the one-minute simulation. Notable observations: The target is initially moved further from the current state to ‘pull’ it towards the desired state in a shorter period. In addition, the adapted target is offset from the desired state as to counter the steady-state error seen in the reference signal. . . . .                                                                                                                                                                                                  | 6 |
| 11 | Annotated views of the robot and its most important actuation mechanisms . . .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 7 |
| 12 | <i>Left</i> : The robot at its fully extended state, corresponding to the “home” position of the servo and actuation arm. <i>Right</i> : The fully contracted robot, corresponding to the maximum (capped) servo output, near the mechanical limit of the actuation arm. . . . .                                                                                                                                                                                                                                                                                  | 7 |
| 13 | The test setup. . . . .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 8 |
| 14 | Nominal signs of the angles for the servo and actuation arm during operation. .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 8 |
| 15 | Qualitative comparison between the behavior of the baseline controller and target adapted controller for the <i>slow-aggressive</i> PID controller. . . . .                                                                                                                                                                                                                                                                                                                                                                                                       | 9 |

|     |                                                                                                                                                                                                                                                                                                                                                                                                                                  |    |
|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| 16  | Metrics evolution over the 2h duration of the experiment for an <i>aggressive</i> but <i>under-responsive</i> PID controller. Each point represents the calculated value of the metric on identical 5min sequences of targets. Plots for all metrics and numerical values can be found in Figure C.1 and Table C.I, respectively. . . . .                                                                                        | 9  |
| 17  | Metrics evolution over the duration of the experiment for an <i>under-tuned</i> PID controller. Each point represents the calculated value of the metric on identical 5min sequences of targets. Plots for all metrics and numerical values can be found in Figure C.2 and Table C.II, respectively. . . . .                                                                                                                     | 10 |
| 18  | Qualitative comparison between the behavior of the baseline controller and target adapted controller for the <i>under-tuned</i> PID controller. . . . .                                                                                                                                                                                                                                                                          | 10 |
| 19  | Metrics evolution over the 1h duration of the experiment for KOSs in a lower state of degradation (0.25–0.25mm and 0.5–0.5mm perforations, see annotations), with their average overlayed. Each point represents the calculated value of the metric on identical 5min sequences of targets. Plots for all metrics and numerical values can be found in Figure C.3 and Table C.III, respectively. . . . .                         | 10 |
| 20  | Metrics evolution over the 2h duration of the experiment for KOSs in a higher state of degradation (1.5–0.5mm and 2–0.5mm perforations, see annotations), with their average overlayed. Each point represents the calculated value of the metric on identical 5min sequences of targets. Plots for all metrics and numerical values can be found in Figure C.4 and Table C.IV, respectively. . . . .                             | 11 |
| 21  | Qualitative comparison of the signal response for the 2–0.5mm perforation. Also showing a comparison between the signals of the target adapted controller, late vs. early into the experiment. . . . .                                                                                                                                                                                                                           | 12 |
| 22  | Metrics evolution over the 20min duration of the crawling-gait experiment, with the average of both adapted controllers overlayed. Each point represents the calculated value of the metric on identical 5min sequences of targets, in this case alternating between values near to -18 and -8 degrees, respectively. Plots for all metrics and numerical values can be found in Figure C.5 and Table C.V, respectively. . . . . | 12 |
| 23  | Qualitative comparison between the behavior of the baseline controller and target adapted controller for the crawling gait experiment. . . . .                                                                                                                                                                                                                                                                                   | 12 |
| 24  | A close-up from the 0.5–0.5mm perforation with target adapter. The signal response generally resembles that of Figure 10 from the toy problem. . . . .                                                                                                                                                                                                                                                                           | 13 |
| 25  | A close-up from the <i>slow-aggressive</i> PID controller with target adapter. The manner in which the target is adapted resembles that of Figure 8 from the toy problem. . . . .                                                                                                                                                                                                                                                | 13 |
| 26  | Minute 1 of the pretrained adapter for the crawling gait experiment. Adaptations are immediately added to the target, resulting in worse behavior. . . . .                                                                                                                                                                                                                                                                       | 14 |
| 27  | A close-up of the 2–0.5mm experiment. The oscillations in the signal response are recorded at an insufficient frequency to contain any meaningful relationship between spaced-out state pairs and the target. As a result, the adapter's output becomes more chaotic as well, further polluting the training data. . . . .                                                                                                       | 14 |
| B.1 | The interaction between the modules (rectangles) and shared variables (ovals) of the computer (blue) and Arduino (red). . . . .                                                                                                                                                                                                                                                                                                  | 16 |
| C.1 | Metrics evolution for the <i>slow-aggressive</i> controller. . . . .                                                                                                                                                                                                                                                                                                                                                             | 17 |
| C.2 | Metrics evolution for the <i>under-tuned</i> controller. . . . .                                                                                                                                                                                                                                                                                                                                                                 | 18 |
| C.3 | Metrics evolution for the 25–25 and 50–50mm perforations. . . . .                                                                                                                                                                                                                                                                                                                                                                | 19 |
| C.4 | Metrics evolution for the 150–50 and 200–50mm perforations. . . . .                                                                                                                                                                                                                                                                                                                                                              | 20 |
| C.5 | Metrics evolution for the crawling gait experiment. . . . .                                                                                                                                                                                                                                                                                                                                                                      | 20 |

|     |                                                                                                                             |    |
|-----|-----------------------------------------------------------------------------------------------------------------------------|----|
| D.1 | Distance in the metric space between the KOSs at the start of the <i>slow-aggressive</i> PID experiment. . . . .            | 23 |
| D.2 | Distance in the metric space between the KOSs at the start of the <i>under-tuned</i> PID experiment. . . . .                | 23 |
| D.3 | Distance in the metric space between the KOSs at the start of the 0.25–0.25mm and 0.5–0.5mm perforation experiment. . . . . | 24 |
| D.4 | Distance in the metric space between the KOSs at the start of the 1.5–0.5mm and 2–0.5mm perforation experiment. . . . .     | 24 |
| D.5 | Distance in the metric space between the KOSs at the start of the crawling gait experiment. . . . .                         | 24 |



# List of Tables

|       |                                                                                                                                  |    |
|-------|----------------------------------------------------------------------------------------------------------------------------------|----|
| I     | Percentual differences after applying the target adapter for the <i>slow-agressive</i> PID experiment . . . . .                  | 9  |
| II    | Percentual differences after applying the target adapter for the <i>under-tuned</i> PID experiment . . . . .                     | 9  |
| III   | Average percentual differences after applying the target adapter for the 0.25–0.25mm and 0.5–0.5mm dynamics experiment . . . . . | 10 |
| IV    | Average percentual differences after applying the target adapter for the 1.5–0.5mm and 2–0.5mm dynamics experiment . . . . .     | 11 |
| V     | Average percentual differences after applying the target adapter for the crawling gait experiment. . . . .                       | 11 |
| C.I   | Numerical values of the metrics for the <i>slow-aggressive</i> controller. . . . .                                               | 17 |
| C.II  | Numerical values of the metrics for the <i>under-tuned</i> controller. . . . .                                                   | 18 |
| C.III | Numerical values of the metrics for the 25–25 and 50–50mm perforations. . .                                                      | 19 |
| C.IV  | Numerical values of the metrics for the 150–50 and 200–50mm perforations. .                                                      | 21 |
| C.V   | Numerical values of the metrics for the crawling gait experiment. . . . .                                                        | 22 |
| D.I   | Numerical values of the reference minute metrics for the <i>slow-aggressive</i> PID experiment. . . . .                          | 23 |
| D.II  | Numerical values of the reference minute metrics for the <i>under-tuned</i> PID experiment. . . . .                              | 23 |
| D.III | Numerical values of the reference minute metrics for the 0.25–0.25mm and 0.5–0.5mm perforation experiment. . . . .               | 24 |
| D.IV  | Numerical values of the reference minute metrics for the 1.5–0.5mm and 2–0.5mm perforation experiment. . . . .                   | 24 |
| D.V   | Numerical values of the reference minute metrics for the crawling gait experiment.                                               | 24 |

