PROVEN PERFORMANCE

Customers in over 60 countries and in diverse markets and sectors.

Kinco® Automation

www.kincoautomation.com Email:sales@kincoautomation.com

(All trademarks and logos in this brochure are property of and registered by their respective owners.)

DToolsPro-202511

Kinco

HMI

Touch Screen

Kinco HMI Catalog

- GREEN Series 2
- FUTURE Series 2
- Capacitive Touch Screen
- Handheld Terminal

About us

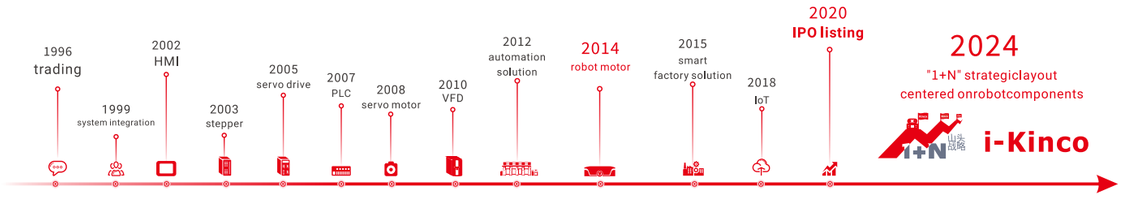

Kinco was founded in 1996, and successfully listed on the Shanghai Stock Exchange in 2020 (abbreviated name: Kinco share, stock code 688160), which is a high-tech, specialized and sophisticated enterprise that attaches great importance to independent research and development and innovation, mainly engaged in the research and development, production, sales and related technical services of industrial automation and robot core components and digital factory hardware and software. It is a leading supplier of automation control, robot power and digital factory solutions in China.

After years of continuous research and development and innovation, Kinco has established a complete product line with independent intellectual property rights, covering a series of products from machine iot to human-machine interaction, control, drive and execution, which are widely used in robots, medical equipment, logistics equipment, packaging equipment, food equipment, clothing equipment, environmental protection equipment, etc. New energy equipment, rail transit equipment and other automation equipment industry.

Based on the comprehensive industrial automation and digital technology platform, the company has in-depth application scenarios in the robot industry, providing display, control, drive and other multi-dimensional solutions for industrial mobile robots, collaborative robots, industrial robots, pan-service robots, and bionic robots. Through the insight of the industry pain points, deep links with robot customers, combined with the advantages of product research and development, the company continues to innovate, and launches industry-leading low-voltage servo products for mobile robots, integrated servo wheel, frameless torque motor for collaborative robots, robot human-machine interfaces, robot controllers and other products. The company has formed a relatively complete robot core parts capability, and after nearly 10 years of hard work in the robot industry, it has become a leading enterprise in the field of mobile robot low-voltage servo, and has a high brand influence in the industry.

Kinco has four research and development centers in Shanghai, Shenzhen, Changzhou and Chengdu, and two manufacturing bases in Shenzhen and Changzhou, a total of 10+ domestic marketing centers, 100+ domestic service providers, 40+ global partners, and products are exported to 70+ countries overseas. In terms of after-sales service, Kinco has established after-sales service centers in Shanghai, Shenzhen and Changzhou.

Four R&D centers and two manufacturing bases

Shanghai

Shenzhen

Changzhou

Chengdu

Shenzhen Manufacturing Center HMI, PLC, drive class

Changzhou Manufacturing Base electric machinery

CONTENTS

CONTENTS

GREEN Series 2 - Overview

06 Overview

GREEN Series 2

Basic

07 GL2043HE
08 GL2070HE/GL2070HE-WIFI/GL2070HE-4G
09 GL2100E/GL2100E-WIFI/GL2100E-4G
10 GL2101E/GL2101E-WIFI/GL2101E-4G

Standard

11 G2070HE/G2070HE-WIFI/G2070HE-4G
12 G2070HE2
13 G2100E/G2100E-WIFI/G2100E-4G
14 G2100E2
15 G2101E/G2101E-4G
16 G2101E2
17 G2121E2/G2121E2-4G
18 G2150E2
19 G2156E/G2156E-WIFI
20 G2156E2

FUTURE Series 2 - Overview

21 Overview

FUTURE Series 2

22 F2070E
23 F2070E2
24 F2100E
25 F2100E2
26 F2121E
27 F2121E2
28 F2150E2
29 F2156E
30 F2156E2

FUTURE Series 2 (UL)

31 F2070E2(UL)
32 F2100E2(UL)
33 F2121E2(UL)
34 F2156E2(UL)

Capacitive Touch Screen

35 GL2070HE-LX
36 GR2070HE-LX
37 GR2104E-PX
38 GR2121E-PX
39 G2100HE-LX/G2100HE-LX-4G
40 F2100HE2-PX
41 F2156E2-PX/F2156E2-PX(UL)
42 F2156E-TX

Handheld Terminal

43 SZ7PE/SZ7PES
44 SZ10PES/SZ10PES-K/SZ10PES-T

Special Series

Waterproof

45 GL2070HE-WIFI-LRF
46 GL2100E-WIFI-LRF

Desktop High-Frequency Reader /Writer

Features of DToolsPro

24 Years of Dedication to Industrial HMI
Consistently delivering high-quality products

Recognized as a leading domestic brand, Kinco doesn’ t design from a distance — we go where our customers work, observing and engaging to uncover the real needs behind every application. This deep understanding has driven a comprehensive upgrade to our proven GREEN and FUTURE series, resulting in the GL2, G2, and F2 — each fine-tuned to serve distinct market segments with performance you can rely on.

Six key strengths of Kinco

Pioneer
Leading the way in China's industrial HMI sector

Publicly Listed
A trusted market leader on China's STAR Market (KECHUANG Board)

24 Years of Excellence
Decades of deep technological expertise and industry insight

Full Portfolio
Complete industrial control solutions for diverse applications

Certified for the World
CE, UL certified and trusted in markets worldwide

Global Reach
Serving customers worldwide

Human Machine Interface Product Catalog

EdgeAccess2
—— Remote Maintenance Platform Designed for the Industrial Internet Era

- Compatible with Kinco's new - generation configuration software Kinco DToolsPro;
- Leading transparent transmission technology — stable, efficient remote access with a modern UI
- Reliable, convenient remote services for OEM equipment providers

Key Features :

- **VNC Remote Desktop –** Real-time monitoring of device operation status
- **Remote Independent Desktop –** Remote and local operations run independently without interference
- **Remote HMI Program Download –** Upload and download HMI programs remotely, with support for batch downloads
- **Remote Pass-through–** Online debugging of PLC programs with support for multiple common PLC protocols
- **Real-time Parameter Monitoring –** View background parameter changes in real time
- **Remote File Management –** Upload and download recipe files, data reports, PDFs, images, and more
- **Operation Log Management –** Full traceability and audit of user actions
- **Mobile Access –** Supports Android and iOS via WeChat Mini Program for easy access

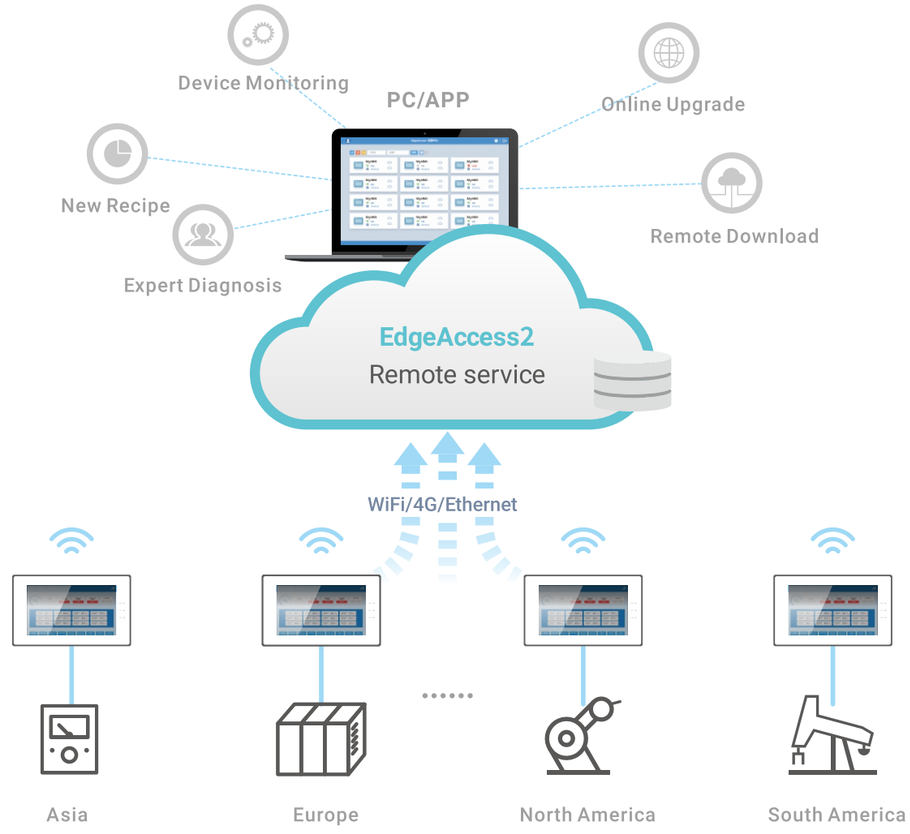

Seamless Integration with Kinco M-IoT Platform

—— Empowering Your Journey into the Industrial Internet Era

Our HMI cloud solution establishes reliable connections between devices, enabling efficient and convenient information exchange across devices, the cloud, and people — anytime, anywhere.

- Real-time device monitoring
- Instant error alerts
- Cloud-ready for seamless IoT platform integration
- Custom O&M dashboards with a rich library of objects for rapid deployment

Device 1

Device 2

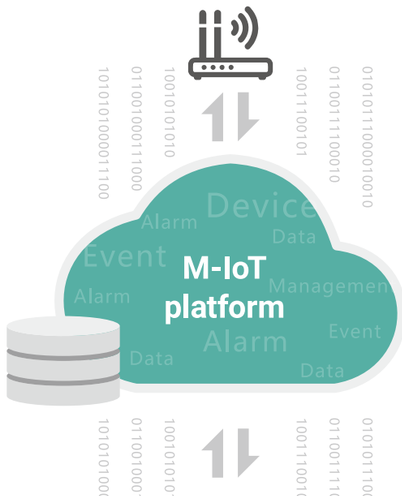

PC

APP

*All models with Ethernet ports listed in this document support this feature.

GREEN Series 2

Compatible with the latest configuration software: Kinco DtoolsPro

GREEN Series 2 — Smart HMI solutions for manufacturing, delivering high performance, efficient development, and exceptional cost-effectiveness. The series offers two options — the GL2 Series (Basic) and the G2 Series (Standard).

Basic Type GL2 series

The smart, efficient, and intelligent choice for your next HMI.

A7 1G		HD	
Dual-core ARM 1GHz CPU	256MB RAM + 4GB Flash	HD + High-brightness + Wide-viewing-angle LCD	Remote IoT with Optional 4G/WIFI

Standard Type G2 series

High-performance HMI solutions for smart manufacturing — developed efficiently with cost-effectiveness.

		HD	
Quad-core ARM 1.5GHz CPU	512MB RAM + 4GB Flash	HD + High-brightness + Wide-viewing-angle LCD	Remote IoT with Optional 4G/WIFI

Basic Type

GL2043HE

- 4.3" 800*480 HD display with 16.7 million colors
- 80/80/80/80 wide viewing angle
- Dual-core CPU with 256MB RAM and 4GB eMMC
- One Ethernet port + dual serial ports
- Compatible with the latest Kinco DToolsPro configuration software and EdgeAccess2

Model/Specification	GL2043HE
Performance	
Display Size	4.3" TFT
Display Area (W x H)	95.04 x 54.71 mm
Resolution	800*480
Colors	16.7 million
Viewing Angle (T/B/L/R)	80/80/80/80
Contrast Ratio	1200:1
Backlight	LED
Brightness	350 cd/m^2
Backlight Life Time	30000 hours
Touch Panel	4-wire resistive type (surface hardness: 3H)
CPU	Dual-core ARM 1 GHz
Memory	256MB RAM + 4GB eMMC
RTC	Built-in
Printer Port	Serial port
Ethernet	LAN0:10/100 Mbps
Program Download	USB Slave (Type-C) / Ethernet port
VPN	HMI remote upload, download, and monitoring; PLC pass-through programming for program upload, download, and monitoring
Communication Port	COM0:RS232/RS485/RS422; COM2:RS232
Power	
Input Power	DC10.8V ～28V
Power Consumption	2W@DC 24V
Voltage Interruption Immunity	<3ms
Insulation Resistance	Over 50MΩ@500V DC
Dielectric Resistance	500V AC 1 minute
Structure	
Enclosure	Engineering plastic
Dimensions (W x H x D)	132 x 102 x 33 mm
Cut-out Dimensions	119 x 93 mm
Mounting	Panel mounting
Weight	0.21 kg
Environment	
Operating Temperature	0 ～50°C
Operating Humidity	10～90%RH (Non-condensing)
Storage Temperature	-20～60°C
Storage Humidity	10～90%RH (Non-condensing)
Vibration Resistance	10 ～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions
Cooling Method	Natural air circulation
Certification	
Panel Protection Grade	Front panel: IP65
CE Certificate	EN61000-6-4:2007+A1:2011, EN61000-6-2:2019
Software	
Configuration Software	Kinco DToolsPro

Dimensions (mm)

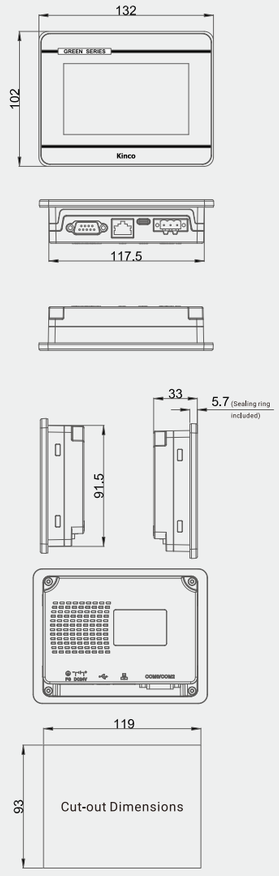

GREEN Series 2 - Basic Type

Basic Type

GL2070HE/GL2070HE-WIFI/GL2070HE-4G

- 7" 1024*600 HD display with 16.7 million colors
- 85/85/85/85 wide viewing angle
- Dual-core CPU with 256MB RAM and 4GB eMMC
- One Ethernet port + three serial ports, two of which support RS485
- Multiple network access options: Ethernet/Wi-Fi/4G
- Compatible with the latest Kinco DToolsPro configuration software and EdgeAccess2

Model/Specification	GL2070HE	GL2070HE-WIFI	GL2070HE-4G
Performance			
Display Size	7"TET		
Display Area (W x H)	154.21 x 85.92 mm		
Resolution	1024*600		
Colors	16.7 million		
Viewing Angle (T/B/L/R)	85/85/85/85		
Contrast Ratio	800:1		
Backlight	LED		
Brightness	450 cd/m^2		
Backlight Life Time	30000 hours		
Touch Panel	4-wire resistive type (surface hardness: 3H)		
CPU	Dual-core ARM 1 GHz		
Memory	256MB RAM + 4GB eMMC		
RTC	Built-in		
Expandable Memory	1*USB Host		
Printer Port	USB Host / Serial port		
Ethernet	10/100 Mbps		
Program Download	USB Slave (Type-C)/U disk/Ethernet port		
Network Access	Ethernet	Ethernet/WiFi	Ethernet/4G
Wi-Fi	None	IEE802.11 b/g/n	LTE-FDD Band 1/3/5/8, LTE-TDD Band 34/38/39/40/41
VPN	HMI remote upload, download, and monitoring; PLC pass-through programming for program upload, download, and monitoring		
Communication Port	COM0:RS232/RS485/RS422; COM1:RS485; COM2:RS232		
Power			
Input Power	DC10.8V ～ 28V		
Power Consumption	4.2W@DC 24V		
Voltage Interruption Immunity	<3ms		
Insulation Resistance	Over 50MΩ@500V DC		
Dielectric Resistance	500V AC 1 minute		
Structure			
Enclosure	Engineering plastic		
Dimensions (W x H x D)	204 x 150 x 37 mm		
Cut-out Dimensions	192 x 138 mm		
Mounting	Panel mounting		
Weight	0.5 kg		
Environment			
Operating Temperature	0 ～50°C		
Operating Humidity	10～90%RH (Non-condensing)		
Storage Temperature	-20～60°C		
Storage Humidity	10～90%RH (Non-condensing)		
Vibration Resistance	10 ～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions		
Cooling Method	Natural air circulation		
Certification			
Panel Protection Grade	Front panel: IP65		
CE Certificate	EN61000-6-4:2019, EN61000-6-2:2019		
Software			
Configuration Software	Kinco DToolsPro		

Dimensions (mm)

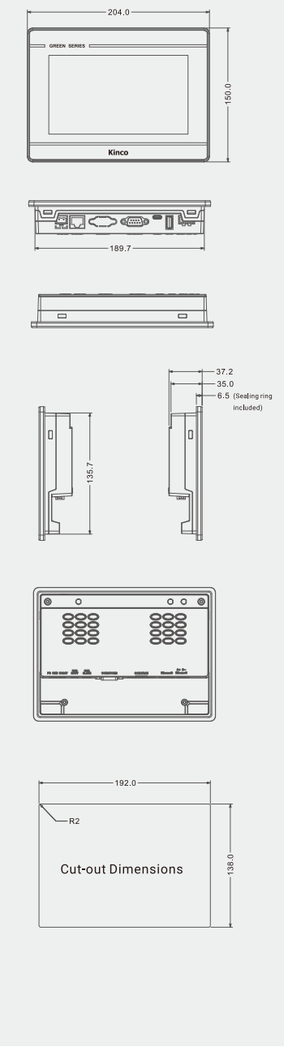

Basic Type

GL2100E/GL2100E-WIFI/GL2100E-4G

- 10.1" 1024*600 HD display with 16.2 million colors
- 85/85/85/85 wide viewing angle
- Dual-core CPU with 256MB RAM and 4GB eMMC
- One Ethernet port + three serial ports, two of which support RS485
- Rear cable exit design for easy cable connection
- Multiple network access options: Ethernet/Wi-Fi/4G
- Compatible with the latest Kinco DToolsPro configuration software and EdgeAccess2

Model/Specification	GL2100E	GL2100E-WIFI	GL2100E-4G
Performance			
Display Size	10.1" TET		
Display Area (W x H)	222.72 x 125.28 mm		
Resolution	1024*600		
Colors	16.2 million		
Viewing Angle (T/B/L/R)	85/85/85/85		
Contrast Ratio	500:1		
Backlight	LED		
Brightness	300 cd/m^2		
Backlight Life Time	30000 hours		
Touch Panel	4-wire resistive type (surface hardness: 3H)		
CPU	Dual-core ARM 1 GHz		
Memory	256MB RAM + 4GB eMMC		
RTC	Built-in		
Expandable Memory	1*USB Host, USB Slave (Type-C)		
Printer Port	USB Host / Serial port		
Ethernet	10/100 Mbps		
Program Download	USB Slave (Type-C)/U disk/Ethernet port		
Network Access	Ethernet	Ethernet/WiFi	Ethernet/4G
Wi-Fi	None	IEE802.11 b/g/n	LTE-FDD Band 1/3/5/8, LTE-TDD Band 34/38/39/40/41
VPN	HMI remote upload, download, and monitoring; PLC pass-through programming for program upload, download, and monitoring		
Communication Port	COM0:RS232/RS485/RS422; COM1:RS485; COM2:RS232		
Power			
Input Power	DC10.8V ～ 28V		
Power Consumption	6W@DC 24V		
Voltage Interruption Immunity	<3ms		
Insulation Resistance	Over 50MΩ@500V DC		
Dielectric Resistance	500V AC 1 minute		
Structure			
Enclosure	Engineering plastic		
Dimensions (W x H x D)	271 x 191 x 36 mm		
Cut-out Dimensions	260 x 179 mm		
Mounting	Panel mounting		
Weight	0.9 kg		
Environment			
Operating Temperature	0 ～50°C		
Operating Humidity	10～90%RH (Non-condensing)		
Storage Temperature	-20～60°C		
Storage Humidity	10～90%RH (Non-condensing)		
Vibration Resistance	10 ～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions		
Cooling Method	Natural air circulation		
Certification			
Panel Protection Grade	Front panel: IP65		
CE Certificate	EN61000-6-4：2019, EN61000-6-2：2019		
Software			
Configuration Software	Kinco DToolsPro		

Dimensions (mm)

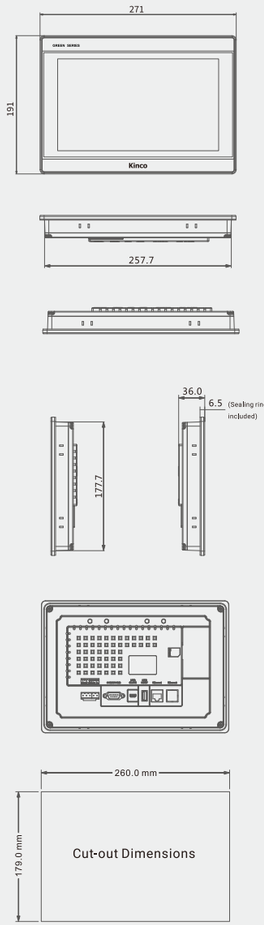

Basic Type

GL2101E/GL2101E-WIFI/GL2101E-4G

- 10.1" 1024*600 HD display with 16.2 million colors
- 85/85/85/85 wide viewing angle
- Dual-core CPU with 256MB RAM and 4GB eMMC
- One Ethernet port + three serial ports, two of which support RS485
- Bottom cable exit design for back space saving
- Multiple network access options: Ethernet/Wi-Fi/4G
- Compatible with the latest Kinco DToolsPro configuration software and EdgeAccess2

Model/Specification	GL2101E	GL2101E-WIFI	GL2101E-4G
Performance			
Display Size	10.1" TET		
Display Area (W x H)	222.72 x 125.28 mm		
Resolution	1024*600		
Colors	16.2 million		
Viewing Angle (T/B/L/R)	85/85/85/85		
Contrast Ratio	500:1		
Backlight	LED		
Brightness	300 cd/m^2		
Backlight Life Time	30000 hours		
Touch Panel	4-wire resistive type (surface hardness: 3H)		
CPU	Dual-core ARM 1 GHz		
Memory	256MB RAM + 4GB eMMC		
RTC	Built-in		
Expandable Memory	1*USB Host, USB Slave (Type-C)		
Printer Port	USB Host / Serial port		
Ethernet	10/100 Mbps		
Program Download	USB Slave (Type-C)/U disk/Ethernet port		
Network Access	Ethernet	Ethernet/WiFi	Ethernet/4G
Wi-Fi	None	IEE802.11 b/g/n	LTE-FDD Band 1/3/5/8, LTE-TDD Band 34/38/39/40/41
VPN	HMI remote upload, download, and monitoring; PLC pass-through programming for program upload, download, and monitoring		
Communication Port	COM0:RS232/RS485/RS422; COM1:RS485; COM2:RS232		
Power			
Input Power	DC10.8V ～ 28V		
Power Consumption	6W@DC 24V		
Voltage Interruption Immunity	<3ms		
Insulation Resistance	Over 50MΩ@500V DC		
Dielectric Resistance	500V AC 1 minute		
Structure			
Enclosure	Engineering plastic		
Dimensions (W x H x D)	271 x 213 x 38 mm		
Cut-out Dimensions	260 x 202 mm		
Mounting	Panel mounting		
Weight	1.1 kg		
Environment			
Operating Temperature	0 ～50°C		
Operating Humidity	10～90%RH (Non-condensing)		
Storage Temperature	-20～60°C		
Storage Humidity	10～90%RH (Non-condensing)		
Vibration Resistance	10 ～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions		
Cooling Method	Natural air circulation		
Certification			
Panel Protection Grade	Front panel: IP65		
CE Certificate	EN61000-6-4：2019, EN61000-6-2：2019		
Software			
Configuration Software	Kinco DToolsPro		

Dimensions (mm)

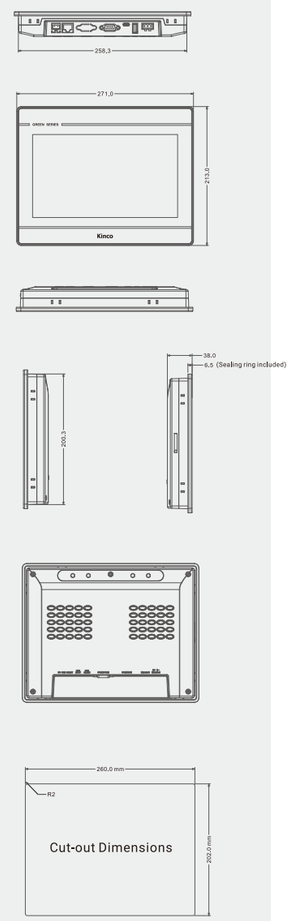

Standard Type

G2070HE/G2070HE-WIFI/G2070HE-4G

- 7" 1024*600 HD display with 16.7 million colors
- 85/85/85/85 wide viewing angle
- Quad-core CPU with 512MB RAM and 4GB flash
- Three serial ports, two of which support RS485
- Multiple network access options: Ethernet/Wi-Fi/4G
- Compatible with the latest Kinco DToolsPro configuration software and EdgeAccess2

Model/Specification	G2070HE	G2070HE-WIFI	G2070HE-4G
Performance			
Display Size	7" TFT		
Display Area (W x H)	154.21 x 85.92 mm		
Resolution	1024*600		
Colors	16.7 million		
Viewing Angle (T/B/L/R)	85/85/85/85		
Contrast Ratio	800:1		
Backlight	LED		
Brightness	450 cd/m^2		
Backlight Life Time	30000 hours		
Touch Panel	4-wire resistive type (surface hardness: 3H)		
CPU	Quad-core ARM 1.5GHz		
Memory	512MB RAM + 4GB eMMC		
RTC	Built-in		
Expandable Memory	1*USB Host		
Printer Port	USB Host / Serial port		
Ethernet	LAN0:10/100Mbps		
Program Download	USB Slave (Type-C) / U disk / Ethernet port		
Network Access	Ethernet	Ethernet/WIFI	Ethernet/4G
Wi-Fi	None	IEE802.11 b/g/n	LTE-FDD Band 1/3/5/8, LTE-TDD Band 34/38/39/40/41
VPN	HMI remote upload, download, and monitoring; PLC pass-through programming for program upload, download, and monitoring		
Communication Port	COM0:RS232/RS485/RS422; C0M1:RS485/RS422; C0M2:RS232		
Power			
Input Power	DC18V ~ 28V		
Power Consumption	7W@DC 24V		
Voltage Interruption Immunity	<3ms		
Insulation Resistance	Over 50MΩ@500V DC		
Dielectric Resistance	500V AC 1 minute		
Structure			
Enclosure	Engineering plastic		
Dimensions (W x H x D)	204 X 150 X 37 mm		
Cut-out Dimensions	192 X 138 mm		
Mounting	Panel mounting		
Weight	0.5Kg		
Environment			
Operating Temperature	0~50°C		
Operating Humidity	10~90%RH(Non-condensing)		
Storage Temperature	-20~60°C		
Storage Humidity	10~90%RH(Non-condensing)		
Vibration Resistance	10 ～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions		
Cooling Method	Natural air circulation		
Certification			
Panel Protection Grade	Front panel: IP65		
CE Certificate	EN61000-6-4:2019，EN61000-6-2:2019		
Software			
Configuration Software	Kinco DtoolsPro		

Dimensions (mm)











GREEN Series 2 - Standard Type

Standard Type

G2070HE2

- 7" 1024*600 HD display with 16.7 million colors
- 85/85/85/85 wide viewing angle
- Quad-core CPU with 512MB RAM and 4GB flash
- Three serial ports, two of which support RS485
- Compatible with the latest Kinco DToolsPro configuration software and EdgeAccess2

Model/Specification	G2070HE2
Performance	
Display Size	7" TFT
Display Area (W x H)	154.21 x 85.92 mm
Resolution	1024*600
Colors	16.7 million
Viewing Angle (T/B/L/R)	85/85/85/85
Contrast Ratio	800:1
Backlight	LED
Brightness	450 cd/m^2
Backlight Life Time	30000 hours
Touch Panel	4-wire resistive type (surface hardness: 3H)
CPU	Quad-core ARM 1.5GHz
Memory	512MB RAM + 4GB eMMC
RTC	Built-in
Expandable Memory	1*USB Host
Printer Port	USB Host / Serial port
Ethernet	LAN0:10/100Mbps; LAN1: 10/100Mbps
Program Download	USB Slave (Type-C) / U disk / Ethernet port
VPN	HMI remote upload, download, and monitoring; PLC pass-through programming for program upload, download, and monitoring
Communication Port	COM0:RS232/RS485/RS422; C0M1:RS485/RS422; C0M2:RS232
Power	
Input Power	DC18V ~ 28V
Power Consumption	7W@DC 24V
Voltage Interruption Immunity	<3ms
Insulation Resistance	Over 50MΩ@500V DC
Dielectric Resistance	500V AC 1minute
Structure	
Enclosure	Engineering plastic
Dimensions (W x H x D)	204 X 150 X 37 mm
Cut-out Dimensions	192 X 138 mm
Mounting	Panel mounting
Weight	0.5Kg
Environment	
Operating Temperature	0~50°C
Operating Humidity	10~90%RH(Non-condensing)
Storage Temperature	-20~60°C
Storage Humidity	10~90%RH(Non-condensing)
Vibration Resistance	10 ～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions
Cooling Method	Natural air circulation
Certification	
Panel Protection Grade	Front panel: IP65
CE Certificate	EN61000-6-4:2019，EN61000-6-2:2019
Software	
Configuration Software	Kinco DtoolsPro

Dimensions (mm)











Standard Type

G2100E/G2100E-WIFI/G2100E-4G

- 10.1" 1024*600 HD display with 16.7 million colors
- 85/85/85/85 wide viewing angle
- Quad-core CPU with 512MB RAM and 4GB eMMC
- Three serial ports, two of which support RS485
- Multiple network access options: Ethernet/Wi-Fi/4G
- Rear cable exit design for easy cable connection
- Compatible with the latest Kinco DToolsPro configuration software and EdgeAccess2

Model/Specification	G2100E	G2100E-WIFI	G2100E-4G
Performance			
Display Size	10.1"TFT		
Display Area (W x H)	222.72 x 125.28 mm		
Resolution	1024*600		
Colors	16.7 million		
Viewing Angle (T/B/L/R)	85/85/85/85		
Contrast Ratio	500:1		
Backlight	LED		
Brightness	300 cd/m^2		
Backlight Life Time	30000 hours		
Touch Panel	4-wire resistive type (surface hardness: 3H)		
CPU	Quad-core ARM 1.5GHz		
Memory	512MB RAM + 4GB eMMC		
RTC	Built-in		
Expandable Memory	1*USB Host		
Printer Port	USB Host / Serial port		
Ethernet	LAN0:10/100Mbps		
Program Download	USB Slave (Type-C) / U disk / Ethernet port		
Network Access	Ethernet	Ethernet/WiFi	Ethernet/4G
Wi-Fi	None	IEE802.11 b/g/n	LTE-FDD Band 1/3/5/8, LTE-TDD Band 34/38/39/40/41
VPN	HMI remote upload, download, and monitoring; PLC pass-through programming for program upload, download, and monitoring		
Communication Port	COM0:RS232/RS485/RS422;COM1:RS485;COM2:RS232		
Power			
Input Power	DC18V~DC28V		
Power Consumption	7W@DC 24V		
Voltage Interruption Immunity	<3ms		
Insulation Resistance	Over 50MΩ@500V DC		
Dielectric Resistance	500V AC 1 minute		
Structure			
Enclosure	Engineering plastic		
Dimensions (W x H x D)	280 x 193 x 36 mm		
Cut-out Dimensions	260mm*179mm		
Mounting	Panel mounting		
Weight	0.9Kg		
Environment			
Operating Temperature	0~50°C		
Operating Humidity	10~90%RH (Non-condensing)		
Storage Temperature	-20~60°C		
Storage Humidity	10~90%RH (Non-condensing)		
Vibration Resistance	10～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions		
Cooling Method	Natural air circulation		
Certification			
Panel Protection Grade	Front panel: IP65		
CE Certificate	EN61000-6-4:2019，EN61000-6-2:2019		
Software			
Configuration Software	Kinco DToolsPro		

Dimensions (mm)

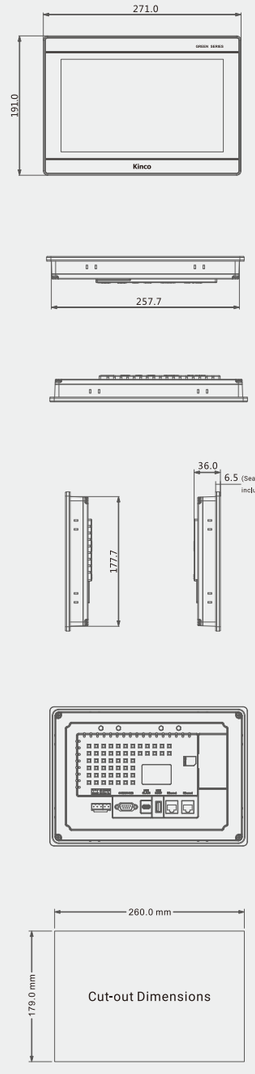

GREEN Series 2 - Standard Type

Standard Type

G2100E2

- 10.1" 1024*600 HD display with 16.7 million colors
- 85/85/85/85 wide viewing angle
- Quad-core CPU with 512MB RAM and 4GB eMMC
- Three serial ports, two of which support RS485
- Rear cable exit design for easy cable connection
- Compatible with the latest Kinco DToolsPro configuration software and EdgeAccess2

Model/Specification	G2100E2
Performance	
Display Size	10.1"TFT
Display Area (W x H)	222.72 x 125.28 mm
Resolution	1024*600
Colors	16.7 million
Viewing Angle (T/B/L/R)	85/85/85/85
Contrast Ratio	500:1
Backlight	LED
Brightness	300 cd/m^2
Backlight Life Time	30000 hours
Touch Panel	4-wire resistive type (surface hardness: 3H)
CPU	Quad-core ARM 1.5GHz
Memory	512MB RAM + 4GB eMMC
RTC	Built-in
Expandable Memory	1*USB Host
Printer Port	USB Host / Serial port
Ethernet	LAN0:10/100Mbps; LAN1: 10/100Mbps
Program Download	USB Slave (Type-C) / U disk / Ethernet port
VPN	HMI remote upload, download, and monitoring; PLC pass-through programming for program upload, download, and monitoring
Communication Port	COM0:RS232/RS485/RS422;COM1:RS485;COM2:RS232
Power	
Input Power	DC18V~DC28V
Power Consumption	7W@DC 24V
Voltage Interruption Immunity	<3ms
Insulation Resistance	Over 50MΩ@500V DC
Dielectric Resistance	500V AC 1 minute
Structure	
Enclosure	Engineering plastic
Dimensions (W x H x D)	280 x 193 x 36 mm
Cut-out Dimensions	260mm*179mm
Mounting	Panel mounting
Weight	0.9Kg
Environment	
Operating Temperature	0~50°C
Operating Humidity	10~90%RH (Non-condensing)
Storage Temperature	-20~60°C
Storage Humidity	10~90%RH (Non-condensing)
Vibration Resistance	10～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions
Cooling Method	Natural air circulation
Certification	
Panel Protection Grade	Front panel: IP65
CE Certificate	EN61000-6-4:2019，EN61000-6-2:2019
Software	
Configuration Software	Kinco DToolsPro

Dimensions (mm)

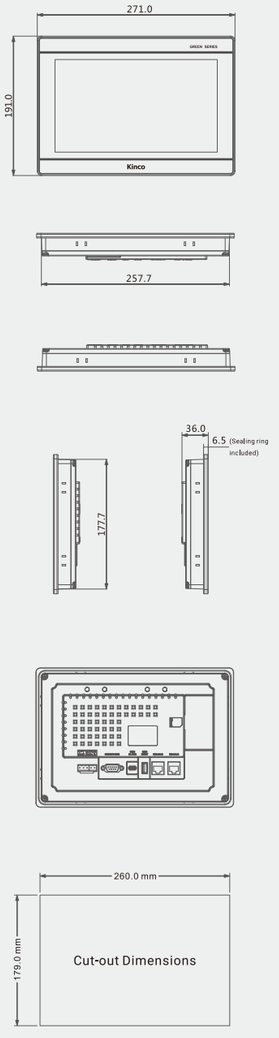

Standard Type

G2101E/G2101E-4G

- 10.1" 1024*600 HD display with 16.7 million colors
- Quad-core CPU with 512MB RAM and 4GB eMMC
- Three serial ports, two of which support RS485
- Network access options: Ethernet/4G
- Bottom cable exit design for saving space
- Compatible with the latest Kinco DToolsPro configuration software and EdgeAccess2

Model/Specification	G2101E	G2101E-4G
Performance		
Display Size	10.1″ TFT	
Display Area (W x H)	222.72 x 125.28 mm	
Resolution	1024*600	
Colors	16.7 million	
Viewing Angle (T/B/L/R)	60/60/70/80	
Contrast Ratio	500:1	
Backlight	LED	
Brightness	350 cd/m^2	
Backlight Life Time	30000 hours	
Touch Panel	4-wire resistive type (surface hardness: 3H)	
CPU	Quad-core ARM 1.5GHz	
Memory	512MB RAM + 4GB eMMC	
RTC	Built-in	
Expandable Memory	1*USB Host	
Printer Port	USB Host / Serial port	
Ethernet	LAN0:10/100 Mbps	
Program Download	USB Slave (Type-C) / U disk / Ethernet port	
Network Access	Ethernet	Ethernet/4G
Wi-Fi	None	LTE-FDD Band 1/3/5/8, LTE-TDD Band 34/38/39/40/41
VPN	HMI remote upload, download, and monitoring; PLC pass-through programming for program upload, download, and monitoring	
Communication Port	COM0:RS232/RS485/RS422; COM1:RS485/RS422; COM2:RS232	
Power		
Input Power	DC18V ～DC28V	
Power Consumption	7W@DC 24V	
Voltage Interruption Immunity	<3ms	
Insulation Resistance	Over 50MΩ@500V DC	
Dielectric Resistance	500V AC 1 minute	
Structure		
Enclosure	Engineering plastic	
Dimensions (W x H x D)	271 x 213 x 38 mm	
Cut-out Dimensions	260 x 202 mm	
Mounting	Panel mounting	
Weight	1.1kg	
Environment		
Operating Temperature	0 ～50°C	
Operating Humidity	10～90%RH (Non-condensing)	
Storage Temperature	-20～60°C	
Storage Humidity	10～90%RH (Non-condensing)	
Vibration Resistance	10 ～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions	
Cooling Method	Natural air circulation	
Certification		
Panel Protection Grade	Front panel: IP65	
CE Certificate	EN61000-6-4:2019，EN61000-6-2:2019	
Software		
Configuration Software	Kinco DToolsPro	

Dimensions (mm)

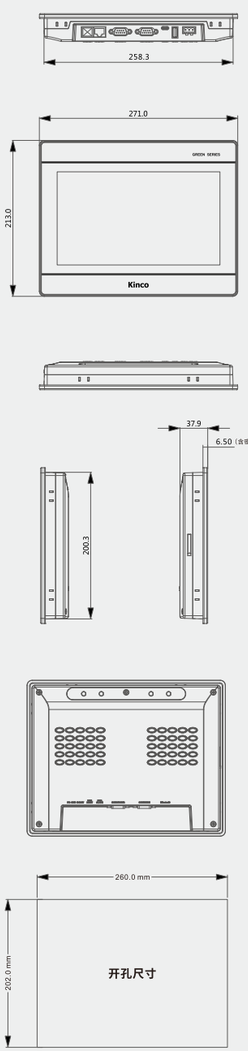

GREEN Series 2 - Standard Type

Standard Type

G2101E2

- 10.1" 1024*600 HD display with 16.7 million colors
- Quad-core CPU with 512MB RAM and 4GB eMMC
- Three serial ports, two of which support RS485
- Bottom cable exit design for saving space
- Compatible with the latest Kinco DToolsPro configuration software and EdgeAccess2

Model/Specification	G2101E2
Performance	
Display Size	10.1″ TFT
Display Area (W x H)	222.72 x 125.28 mm
Resolution	1024*600
Colors	16.7 million
Viewing Angle (T/B/L/R)	60/60/70/80
Contrast Ratio	500:1
Backlight	LED
Brightness	350 cd/m^2
Backlight Life Time	30000 hours
Touch Panel	4-wire resistive type (surface hardness: 3H)
CPU	Quad-core ARM 1.5GHz
Memory	512MB RAM + 4GB eMMC
RTC	Built-in
Expandable Memory	1*USB Host
Printer Port	USB Host / Serial port
Ethernet	LAN0:10/100 Mbps; LAN1:10/100Mbps
Program Download	USB Slave (Type-C) / U disk / Ethernet port
VPN	HMI remote upload, download, and monitoring; PLC pass-through programming for program upload, download, and monitoring
Communication Port	COM0:RS232/RS485/RS422; COM1:RS485/RS422; COM2:RS232
Power	
Input Power	DC18V ～DC28V
Power Consumption	7W@DC 24V
Voltage Interruption Immunity	<3ms
Insulation Resistance	Over 50MΩ@500V DC
Dielectric Resistance	500V AC 1 minute
Structure	
Enclosure	Engineering plastic
Dimensions (W x H x D)	271 x 213 x 38 mm
Cut-out Dimensions	260 x 202 mm
Mounting	Panel mounting
Weight	1.1kg
Environment	
Operating Temperature	0 ～50°C
Operating Humidity	10～90%RH (Non-condensing)
Storage Temperature	-20～60°C
Storage Humidity	10～90%RH (Non-condensing)
Vibration Resistance	10 ～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions
Cooling Method	Natural air circulation
Certification	
Panel Protection Grade	Front panel: IP65
CE Certificate	EN61000-6-4:2019，EN61000-6-2:2019
Software	
Configuration Software	Kinco DToolsPro

Dimensions (mm)

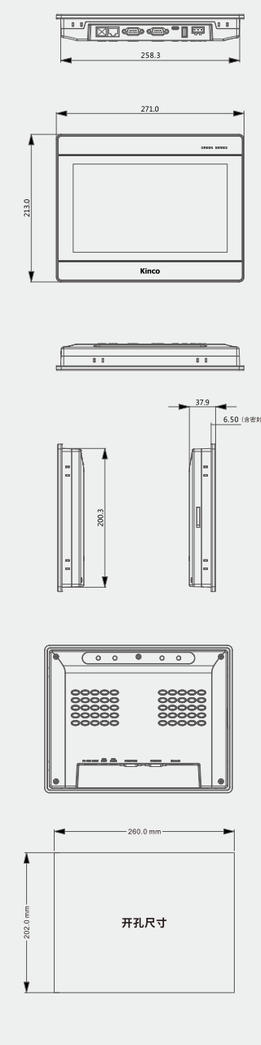

Standard Type

G2121E2/G2121E2-4G

- 12.1" 1280*800 HD display with 16.7 million colors
- 85/85/85/85 wide viewing angle
- Quad-core CPU with 512MB RAM and 4GB eMMC
- Three serial ports, two of which support RS485
- Network access options: Ethernet/4G
- Rear cable exit design for easy cable connection
- Compatible with the latest Kinco DToolsPro configuration software and EdgeAccess2

Model/Specification	G2121E2	G2121E2-4G
Performance		
Display Size	12.1" TFT	
Display Area (W x H)	261.12 x 163.20 mm	
Resolution	1280*800	
Colors	16.7 million	
Viewing Angle (T/B/L/R)	85/85/85/85	
Contrast Ratio	1200∶1	
Backlight	LED	
Brightness	400 cd/m^2	
Backlight Life Time	50000 hours	
Touch Panel	4-wire resistive type (surface hardness: 3H)	
CPU	Quad-core ARM 1.5GHz	
Memory	512MB RAM + 4GB eMMC	
RTC	Built-in	
Expandable Memory	1*USB Host	
Printer Port	USB Host / Serial port	
Ethernet	LAN0:10/100Mbps; LAN1:10/100Mbps	LAN0:10/100Mbps
Program Download	USB Slave (Type-C) / U disk / Ethernet port	
Network Access	Ethernet	Ethernet/4G
Wi-Fi	None	LTE-FDD Band 1/3/5/8, LTE-TDD Band 34/38/39/40/41
VPN	HMI remote upload, download, and monitoring; PLC pass-through programming for program upload, download, and monitoring	
Communication Port	COM0:RS232/RS485/RS422; COM1:RS485/RS422; COM2:RS232	
Power		
Input Power	DC18V ～ 28V	
Power Consumption	15W@DC 24V	
Voltage Interruption Immunity	<3ms	
Insulation Resistance	Over 50MΩ@500V DC	
Dielectric Resistance	500V AC 1 minute	
Structure		
Enclosure	Engineering plastic	
Dimensions (W x H x D)	309 x 229 x 43 mm	
Cut-out Dimensions	299 x 219 mm	
Mounting	Panel mounting	
Weight	1.6kg	
Environment		
Operating Temperature	0 ～50°C	
Operating Humidity	10～90%RH (Non-condensing)	
Storage Temperature	-20～60°C	
Storage Humidity	10～90%RH (Non-condensing)	
Vibration Resistance	10 ～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions	
Cooling Method	Natural air circulation	
Certification		
Panel Protection Grade	Front panel: IP65	
CE Certificate	EN61000-6-4:2019，EN61000-6-2:2019	
Software		
Configuration Software	Kinco DToolsPro	

Dimensions (mm)









GREEN Series 2 - Standard Type

Standard Type

G2150E2

- 15" 1024*768 display with 16.7 million colors
- 88/88/88/88 wide viewing angle
- Quad-core CPU with 512MB RAM and 4GB eMMC
- Two Ethernet ports + three serial ports, two of which support RS485
- Built-in isolated power supply, good protection
- Compatible with the latest Kinco DToolsPro configuration software and EdgeAccess2

Model/Specification	G2150E2
Performance	
Display Size	15" TFT
Display Area (W x H)	304.1 x 228.1 mm
Resolution	1024*768
Colors	16.7 million
Viewing Angle (T/B/L/R)	88/88/88/88
Contrast Ratio	2500:1
Backlight	LED
Brightness	350 cd/m^2
Backlight Life Time	70,000 hours
Touch Panel	4-wire resistive type (surface hardness: 3H)
CPU	Quad-core ARM 1.5GHz
Memory	512MB RAM + 4GB eMMC
RTC	Built-in + 512KB recipe
Expandable Memory	1*USB Host
Printer Port	USB host / Serial port
Ethernet	LAN0:10/100 Mbps; LAN1:10/100 Mbps
Program Download	Ethernet port / USB Slave / U disk
Communication Port	COM0:RS232/RS485/RS422; COM1:RS485/RS422; COM2:RS232;
Power	
Input Power	DC18V ~ 28V
Power Consumption	15W@DC24V
Voltage Interruption Immunity	<3ms
Insulation Resistance	Over 50MΩ@500V DC
Dielectric Resistance	500 VAC 1 minute
Structure	
Enclosure	Engineering plastic
Dimensions (W x H x D)	398 x 298 x 47 mm
Cut-out Dimensions	383 x 283 mm
Mounting	Panel mounting
Weight	3 kg
Environment	
Operating Temperature	0~50°C
Operating Humidity	10~90% RH (non-condensing)
Storage Temperature	-20~60°C
Storage Humidity	10~90% RH (non-condensing)
Vibration Resistance	10 ～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions
Cooling Method	Natural air circulation
Certification	
Panel Protection Grade	Front panel: IP65
CE Certificate	EN61000-6-4:2019，EN61000-6-2:2019
Software	
Configuration Software	Kinco DToolsPro

Dimensions (mm)











Standard Type

G2156E/G2156E-WIFI

- 15.6" 1920*1080 display with 16.7 million colors
- Quad-core CPU with 512MB RAM and 4GB eMMC
- One Ethernet port + two serial ports
- Network access options: Ethernet/Wi-Fi
- Metal enclosure + PCB coating + power isolation
- Compatible with the latest Kinco DToolsPro configuration software and EdgeAccess2

Model/Specification	G2156E	G2156E-WIFI
Performance		
Display Size	15.6" TFT	
Display Area (W x H)	344.16 x 193.59 mm	
Resolution	1920*1080	
Colors	16.7 million	
Viewing Angle (T/B/L/R)	85/85/89/89	
Contrast Ratio	800:1	
Backlight	LED	
Brightness	250 cd/m²	
Backlight Life Time	30000 hours	
Touch Panel	4-wire resistive type (surface hardness: 3H)	
CPU	Quad-core ARM 1.5GHz	
Memory	512MB RAM + 4GB eMMC	
RTC	Built-in	
Expandable Memory	1*USB Host	
Printer Port	USB Host / Serial port	
Ethernet	LAN0:10/100Mbps	
Program Download	USB Slave (Type-C) / U disk / Ethernet port	
Network Access	Ethernet	Ethernet/WIFI
Wi-Fi	None	IEE802.11 b/g/n
VPN	HMI remote upload, download, and monitoring; PLC pass-through programming for program upload, download, and monitoring	
Communication Port	COM0:RS232/RS485/RS422; COM2:RS232	
Power		
Input Power	DC18V ～ 28V	
Power Consumption	15W@DC 24V	
Voltage Interruption Immunity	<3ms	
Insulation Resistance	Over 50MΩ@500V DC	
Dielectric Resistance	500V AC 1 minute	
Structure		
Enclosure	Metal	
Dimensions (W x H x D)	395 x 259 x 25.5 mm	
Cut-out Dimensions	382 x 246 mm	
Mounting	Panel mounting & VESA mounting (100 x 100 mm)	
Weight	2.5 kg	
Environment		
Operating Temperature	0 ～50°C	
Operating Humidity	10～90%RH (Non-condensing)	
Storage Temperature	-20～60°C	
Storage Humidity	10～90%RH (Non-condensing)	
Vibration Resistance	10 ～500Hz, 30m/s², 1 hour each for X, Y, Z directions	
Cooling Method	Natural air circulation	
Certification		
Panel Protection Grade	Front panel: IP65	
CE Certificate	EN61000-6-4:2019，EN61000-6-2:2019	
Software		
Configuration Software	Kinco DToolsPro	

Dimensions (mm)

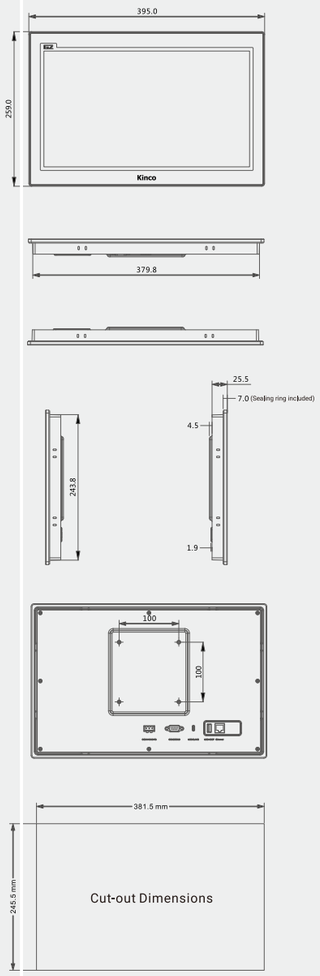

Standard Type

G2156E2

- 15.6" 1920*1080 display with 16.7 million colors
- Quad-core CPU with 512MB RAM and 4GB eMMC
- Two Ethernet ports + three serial ports
- Metal enclosure + PCB coating + power isolation
- Compatible with the latest Kinco DToolsPro configuration software and EdgeAccess2

Model/Specification	G2156E2
Performance	
Display Size	15.6"TFT
Display Area (W x H)	344.16 x 193.59 mm
Resolution	1920*1080
Colors	16.7 million
Viewing Angle (T/B/L/R)	85/85/89/89
Contrast Ratio	800:1
Backlight	LED
Brightness	250 cd/m²
Backlight Life Time	30000 hours
Touch Panel	4-wire resistive type (surface hardness: 3H)
CPU	Quad-core ARM 1.5GHz
Memory	512MB RAM + 4GB eMMC
RTC	Built-in RTC + 512KB recipe
Expandable Memory	1*USB Host
Printer Port	USB host / Serial port
Ethernet	LAN0:10/100 Mbps; LAN1:10/100 Mbps
Program Download	Ethernet port / USB slave / U disk
Communication Port	COM0:RS232/RS485/RS422; COM2:RS232
Power	
Input Power	DC18V~DC28V
Power Consumption	15W@DC24V
Voltage Interruption Immunity	<3ms
Insulation Resistance	Over 50MΩ@500V DC
Dielectric Resistance	500 VAC 1 minute
Structure	
Enclosure	Metal
Dimensions (W x H x D)	395 x 259 x 25.5 mm
Cut-out Dimensions	382 x 246 mm
Mounting	Panel mounting & VESA mounting (100 x 100 mm)
Weight	2.5kg
Environment	
Operating Temperature	0~50°C
Operating Humidity	10~90% RH (non-condensing)
Storage Temperature	-20~60°C
Storage Humidity	10~90% RH (noncondensing)
Vibration Resistance	10 ～500Hz, 30m/s², 1 hour each for X, Y, Z directions
Cooling Method	Natural air circulation
Certification	
Panel Protection Grade	Front panel: IP65
CE Certificate	EN61000-6-4:2019，EN61000-6-2:2019
Software	
Configuration Software	Kinco DToolsPro

Dimensions (mm)

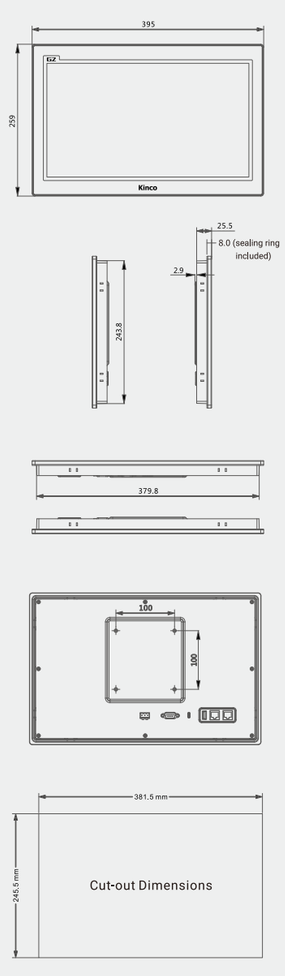

FUTURE Series 2

Intelligent HMI Built for High-End Manufacturing

Compatible with the latest configuration software: Kinco DtoolsPro

Guided by a "Quality First" philosophy, Kinco has been deeply rooted in the manufacturing industry for over 20 years, staying close to customer needs and real-world applications. Integrating the latest advancements in IoT, big data, cloud computing, and edge-to-cloud collaboration, we are proud to introduce a milestone addition to our HMI portfolio — the FUTURE Series 2 — purpose-built for high-end equipment manufacturers

- Quad-core ARM 1.8GHz
- Power Isolation + PCB Coating
- Compatible with Kinco DToolsPro
- 1GB RAM + 8GB Flash
- CNC Metal Enclosure
- Two Ethernet port + Two Serial port
- HD + High-brightness + Wide-viewing-angle LCD
- CE&UL Certified
- 7, 10.1, 12.1, 15, 15.6 inch

Advanced Type

F2070E

- 7" 1024*600 display with 16.7 million colors
- Quad-core CPU with 1GB RAM + 8GB flash
- Three serial ports, two of which support RS485
- Compatible with the latest Kinco DToolsPro configuration software and EdgeAccess2

Model/Specification	F2070E
Performance	
Display Size	7″ TFT
Display Area (W x H)	154.08 x 85.92 mm
Resolution	1024*600
Colors	16.7 million
Viewing Angle (T/B/L/R)	85/85/85/85
Contrast Ratio	800:1
Backlight	LED
Brightness	450 cd/m^2
Backlight Life Time	50000 hours
Touch Panel	4-wire resistive type (surface hardness: 3H)
CPU	Quad-core ARM 1.8GHz
Memory	1GB RAM + 8GB flash
RTC	Built-in RTC + 512KB recipe
Expandable Memory	1*USB Host
Printer Port	USB Host / Serial port
Ethernet	LAN0:10/100Mbps
Program Download	Ethernet port / USB slave / U disk
Communication Port	COM0:RS232/RS485/RS422; COM1:RS485/RS422;COM2:RS232
Power	
Input Power	DC18V ～ 28V
Power Consumption	7W@DC 24V
Voltage Interruption Immunity	<3ms
Insulation Resistance	Over 50MΩ@500V DC
Dielectric Resistance	500V AC 1 minute
Structure	
PCB Coating	Yes
Enclosure	Engineering plastic
Dimensions (W x H x D)	204 x 150 x 37 mm
Cut-out Dimensions	192 x 138 mm
Mounting	Panel mounting
Weight	0.6 kg
Environment	
Operating Temperature	-10 ～60°C
Operating Humidity	0～90%RH (Non-condensing)
Storage Temperature	-20～60°C
Storage Humidity	0～90%RH (Non-condensing)
Vibration Resistance	10 ～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions
Cooling Method	Natural air circulation
Certification	
Panel Protection Grade	Front panel: IP65
CE Certificate	EN IEC 61000-6-4:2019, EN IEC 61000-6-2:2019
Software	
Configuration Software	Kinco DToolsPro

Dimensions (mm)









Advanced Type

F2070E2

- 7" display with 16.7 million colors
- Quad-core CPU with 1GB RAM + 8GB flash
- PCB coating + power isolation
- Two Ethernet ports + three serial ports, two of which support RS485
- Compatible with the latest Kinco DToolsPro configuration software and EdgeAccess2

Model/Specification	F2070E2
Performance	
Display Size	7″ TFT
Display Area (W x H)	154.08 x 85.92 mm
Resolution	800*480
Colors	16.7 million
Viewing Angle (T/B/L/R)	80/80/80/80
Contrast Ratio	800:1
Backlight	LED
Brightness	400 cd/m^2
Backlight Life Time	50000 hours
Touch Panel	4-wire resistive type (surface hardness: 3H)
CPU	Quad-core ARM 1.8GHz
Memory	1GB RAM + 8GB flash
RTC	Built-in RTC + 512KB recipe
Expandable Memory	1*USB Host
Printer Port	USB Host / Serial port
Ethernet	LAN0:10/100/1000Mbps; LAN1: 10/100Mbps
Program Download	Ethernet port / USB slave / U disk
Communication Port	COM0:RS232/RS485/RS422; COM1:RS485/RS422;COM2:RS232
Power	
Input Power	DC18V ～ 28V (isolated)
Power Consumption	7W@DC 24V
Voltage Interruption Immunity	<3ms
Insulation Resistance	Over 50MΩ@500V DC
Dielectric Resistance	500V AC 1 minute
Structure	
PCB Coating	Yes
Enclosure	Engineering plastic
Dimensions (W x H x D)	204 x 150 x 37 mm
Cut-out Dimensions	192 x 138 mm
Mounting	Panel mounting
Weight	0.6 kg
Environment	
Operating Temperature	-10 ～60°C
Operating Humidity	0～90%RH (Non-condensing)
Storage Temperature	-20～60°C
Storage Humidity	0～90%RH (Non-condensing)
Vibration Resistance	10 ～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions
Cooling Method	Natural air circulation
Certification	
Panel Protection Grade	Front panel: IP65
CE Certificate	EN IEC 61000-6-4:2019, EN IEC 61000-6-2:2019
Software	
Configuration Software	Kinco DToolsPro

Dimensions (mm)

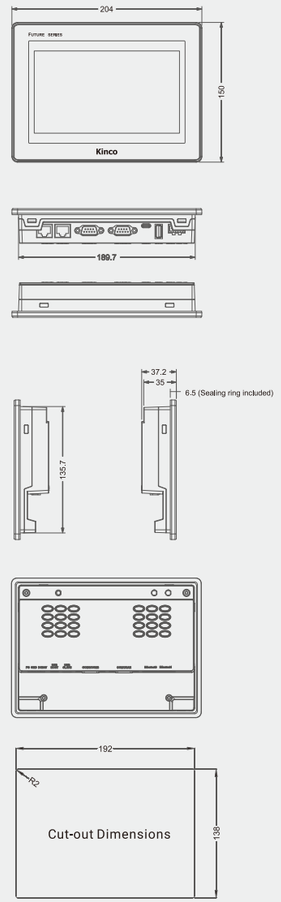

FUTURE Series 2 - Advanced Type

Advanced Type

F2100E

- 10.1" wide-viewing-angle display with 16.7 million colors
- One Ethernet ports + three serial ports
- Quad-core CPU with 1GB RAM + 8GB flash
- Compatible with the latest Kinco DToolsPro configuration software

Model/Specification	F2100E
Performance	
Display Size	10.1″ TFT
Display Area (W x H)	222.72 x 125.28 mm
Resolution	1024*600
Colors	16.7 million
Viewing Angle (T/B/L/R)	85/85/85/85
Contrast Ratio	500:1
Backlight	LED
Brightness	300 cd/m^2
Backlight Life Time	50000 hours
Touch Panel	4-wire resistive type (surface hardness: 3H)
CPU	Quad-core ARM 1.8GHz
Memory	1GB RAM + 8GB flash
RTC	Built-in RTC + 512KB recipe
Expandable Memory	1*USB Host
Printer Port	USB Host / Serial port
Ethernet	LAN0:10/100Mbps
Program Download	Ethernet port / USB slave / U disk
Communication Port	COM0:RS232/RS485/RS422; COM1:RS485; COM2:RS232
Power	
Input Power	DC18V ～ 28V
Power Consumption	7W@DC 24V
Voltage Interruption Immunity	<3ms
Insulation Resistance	Over 50MΩ@500V DC
Dielectric Resistance	500V AC 1 minute
Structure	
PCB Coating	Yes
Enclosure	Engineering plastic
Dimensions (W x H x D)	271 x 213 x 38 mm
Cut-out Dimensions	260 x 202 mm
Mounting	Panel mounting
Weight	1.1 kg
Environment	
Operating Temperature	-10 ～60°C
Operating Humidity	0～90%RH (Non-condensing)
Storage Temperature	-20～60°C
Storage Humidity	0～90%RH (Non-condensing)
Vibration Resistance	10 ～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions
Cooling Method	Natural air circulation
Certification	
Panel Protection Grade	Front panel: IP65
CE Certificate	EN IEC 61000-6-4:2019, EN IEC 61000-6-2:2019
Software	
Configuration Software	Kinco DToolsPro

Dimensions (mm)

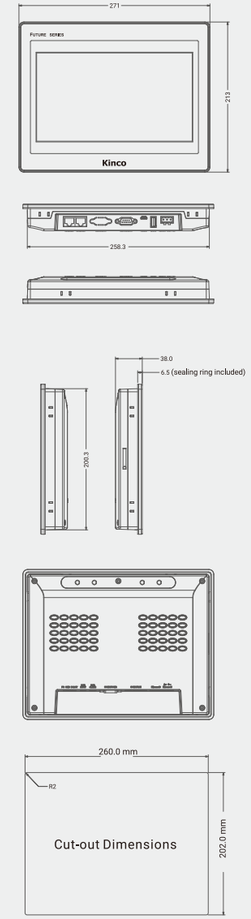

Advanced Type

F2100E2

- 10.1" wide-viewing-angle display with 16.7 million colors
- Two Ethernet ports + two serial ports; built-in power isolation
- Quad-core CPU with 1GB RAM + 8GB flash
- Compatible with the latest KincoDToolsPro configuration software

Model/Specification	F2100E2
Performance	
Display Size	10.1″ TFT
Display Area (W x H)	222.72 x 125.28 mm
Resolution	1024*600
Colors	16.7 million
Viewing Angle (T/B/L/R)	60/60/70/70
Contrast Ratio	500:1
Backlight	LED
Brightness	350 cd/m^2
Backlight Life Time	50000 hours
Touch Panel	4-wire resistive type (surface hardness: 3H)
CPU	Quad-core ARM 1.8GHz
Memory	1GB RAM + 8GB flash
RTC	Built-in RTC + 512KB recipe
Expandable Memory	1*USB Host
Printer Port	USB Host / Serial port
Ethernet	LAN0:10/100/1000Mbps; LAN1:10/100Mbps
Program Download	Ethernet port / USB slave / U disk
Communication Port	COM0:RS232/RS485/RS422; COM2:RS232
Power	
Input Power	DC18V ～ 28V
Power Consumption	7W@DC 24V
Voltage Interruption Immunity	<3ms
Insulation Resistance	Over 50MΩ@500V DC
Dielectric Resistance	500V AC 1 minute
Structure	
PCB Coating	Yes
Enclosure	Engineering plastic
Dimensions (W x H x D)	271 x 213 x 38 mm
Cut-out Dimensions	260 x 202 mm
Mounting	Panel mounting
Weight	1.1 kg
Environment	
Operating Temperature	-10 ～60℃
Operating Humidity	0～90%RH (Non-condensing)
Storage Temperature	-20～60℃
Storage Humidity	0～90%RH (Non-condensing)
Vibration Resistance	10 ～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions
Cooling Method	Natural air circulation
Certification	
Panel Protection Grade	Front panel: IP65
CE Certificate	EN IEC 61000-6-4:2019，EN IEC 61000-6-2:2019
Software	
Configuration Software	Kinco DToolsPro

Dimensions (mm)

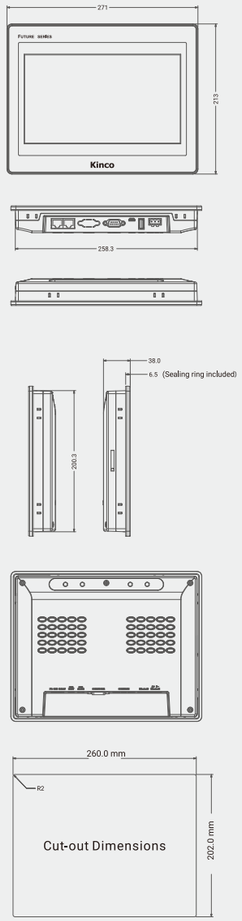

FUTURE Series 2 - Advanced Type

Advanced Type

F2121E

- 12.1" HD display with 16.7 million colors
- One Ethernet ports and three serial ports
- Quad-core CPU with 1GB RAM + 8GB flash
- Metal enclosure + PCB coating + power isolation
- Compatible with the latest Kinco DToolsPro configuration software

Model/Specification	F2121E
Performance	
Display Size	12.1″ TFT
Display Area (W x H)	261.12 x 163.2 mm
Resolution	1280*800
Colors	16.7 million
Viewing Angle (T/B/L/R)	85/85/85/85
Contrast Ratio	1200:1
Backlight	LED
Brightness	400 cd/m^2
Backlight Life Time	50000 hours
Touch Panel	4-wire resistive type (surface hardness: 3H)
CPU	Quad-core ARM 1.8GHz
Memory	1GB RAM + 8GB flash
RTC	Built-in RTC + 512KB recipe
Expandable Memory	1*USB Host
Printer Port	USB Host / Serial port
Ethernet	LAN0:10/100 Mbps
Program Download	Ethernet port / USB slave / U disk
Communication Port	COM0:RS232/RS485/RS422; COM1:RS485; COM2:RS232
Power	
Input Power	DC18V ～ 28V
Power Consumption	10W@DC 24V
Voltage Interruption Immunity	<3ms
Insulation Resistance	Over 50MΩ@500V DC
Dielectric Resistance	500V AC 1 minute
Structure	
PCB Coating	Yes
Enclosure	Metal
Dimensions (W x H x D)	309 x 229 x 37 mm
Cut-out Dimensions	299 x 219 mm
Mounting	Panel mounting & VESA mounting (75 x 75 mm)
Weight	2.05 kg
Environment	
Operating Temperature	-10 ～60℃
Operating Humidity	0～90%RH (Non-condensing)
Storage Temperature	-20～60℃
Storage Humidity	0～90%RH (Non-condensing)
Vibration Resistance	10 ～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions
Cooling Method	Natural air circulation
Certification	
Panel Protection Grade	Front panel: IP65
CE Certificate	EN61000-6-4:2019，EN61000-6-2:2019
Software	
Configuration Software	Kinco DToolsPro

Dimensions (mm)

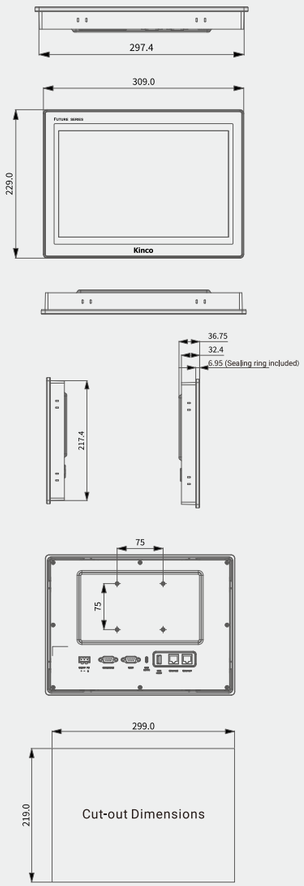

Advanced Type

F2121E2

- 12.1" HD display with 16.7 million colors
- Two Ethernet ports and three serial ports
- Quad-core CPU with 1GB RAM + 8GB flash
- Metal enclosure + PCB coating + power isolation
- Compatible with the latest KincoDToolsPro configuration software

Model/Specification	F2121E2
Performance	
Display Size	12.1" TFT
Display Area (W x H)	261.12 x 163.2 mm
Resolution	1280*800
Colors	16.7 million
Viewing Angle (T/B/L/R)	85/85/85/85
Contrast Ratio	1200:1
Backlight	LED
Brightness	400 cd/m^2
Backlight Life Time	50000 hours
Touch Panel	4-wire resistive type (surface hardness: 3H)
CPU	Quad-core ARM 1.8GHz
Memory	1GB RAM + 8GB flash
RTC	Built-in RTC + 512KB recipe
Expandable Memory	1*USB Host
Printer Port	USB Host / Serial port
Ethernet	LAN0:10/100Mbps; LAN1:10/100Mbps
Program Download	Ethernet port / USB slave / U disk
Communication Port	COM0:RS232/RS485/RS422; COM1:RS485; COM2:RS232
Power	
Input Power	DC18V ～ 28V
Power Consumption	10W@DC 24V
Voltage Interruption Immunity	<3ms
Insulation Resistance	Over 50MΩ@500V DC
Dielectric Resistance	500V AC 1 minute
Structure	
PCB Coating	Yes
Enclosure	Metal
Dimensions (W x H x D)	309 x 229 x 37 mm
Cut-out Dimensions	299 x 219 mm
Mounting	Panel mounting & VESA mounting (75 x 75 mm)
Weight	5 kg
Environment	
Operating Temperature	-10 ～60℃
Operating Humidity	0～90%RH (Non-condensing)
Storage Temperature	-20～60℃
Storage Humidity	0～90%RH (Non-condensing)
Vibration Resistance	10 ～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions
Cooling Method	Natural air circulation
Certification	
Panel Protection Grade	Front panel: IP65
CE Certificate	EN61000-6-4:2019，EN61000-6-2:2019
Software	
Configuration Software	Kinco DToolsPro

Dimensions (mm)

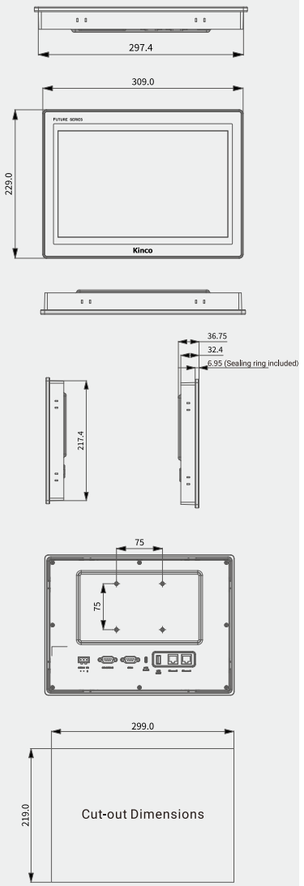

FUTURE Series 2 - Advanced Type

Advanced Type

F2150E2

- 15" 1024*768 display with 16.7 million colors; 88/88/88/88 wide-viewing-angle
- Quad-core CPU with 1GB RAM + 8GB flash; Two Ethernet ports + three serial ports
- PCB coating + power isolation
- Compatible with the latest KincoDToolsPro configuration software

Model/Specification	F2150E2
Performance	
Display Size	15" TFT
Display Area (W x H)	304.1 x 228.1 mm
Resolution	1024*768
Colors	16.7 million
Viewing Angle (T/B/L/R)	88/88/88/88
Contrast Ratio	2500:1
Backlight	LED
Brightness	350 cd/m^2
Backlight Life Time	70000 hours
Touch Panel	4-wire resistive type (surface hardness: 3H)
CPU	Quad-core ARM 1.8GHz
Memory	1GB RAM + 8GB flash
RTC	Built-in RTC + 512KB recipe
Expandable Memory	1*USB host / Serial port
Printer Port	LAN0:10/100/1000 Mbps; LAN1:10/100 Mbps
Ethernet	IEEE802.11 b/g/n
Program Download	Ethernet port / USB slave / U disk
Communication Port	COM0:RS232/RS485/RS422; COM1:RS485/RS422; COM2:RS232
Power	
Input Power	DC18V ～ 28V
Power Consumption	15W@DC 24V
Voltage Interruption Immunity	<3ms
Insulation Resistance	Over 50MΩ@500V DC
Dielectric Resistance	500V AC 1 minute
Structure	
PCB Coating	Yes
Enclosure	Metallic
Dimensions (W x H x D)	366 x 293 x 49.5 mm
Cut-out Dimensions	352 x 279 mm
Mounting	Panel mounting
Weight	5 kg
Environment	
Operating Temperature	-10 ～60℃
Operating Humidity	0～90%RH (Non-condensing)
Storage Temperature	-20～60℃
Storage Humidity	0～90%RH (Non-condensing)
Vibration Resistance	10 ～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions
Cooling Method	Natural air circulation
Certification	
Panel Protection Grade	Front panel: IP65
CE Certificate	EN61000-6-4:2019，EN61000-6-2:2019
Software	
Configuration Software	Kinco DToolsPro

Dimensions (mm)

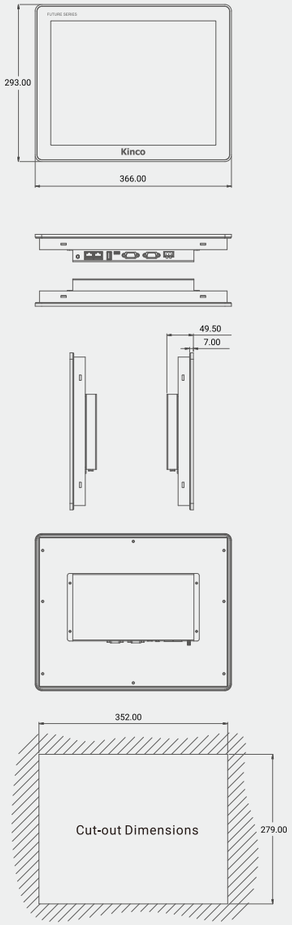

Advanced Type

F2156E

- 15.6" 1920*1080 resistive screen with 16.7 million colors
- One Ethernet port and two serial ports
- Quad-core CPU with 1GB RAM + 8GB flash
- Metal enclosure + PCB coating + power isolation
- Compatible with the latest configuration software Kinco DtoolsPro

Model/Specification	F2156E
Performance	
Display Size	15.6" TFT
Display Area (W x H)	344.16 x 193.59 mm
Resolution	1920*1080
Colors	16.7 million
Viewing Angle (T/B/L/R)	85/85/89/89
Contrast Ratio	800:1
Backlight	LED
Brightness	250 cd/m^2
Backlight Life Time	50000 hours
Touch Panel	4-wire resistive type (surface hardness: 3H)
CPU	Quad-core ARM 1.8GHz
Memory	1GB RAM + 8GB flash
RTC	Built-in RTC + 512KB recipe
Expandable Memory	1*USB Host
Printer Port	USB Host / Serial port
Ethernet	LAN0:10/100/1000Mbps
Program Download	Ethernet port / USB slave / U disk
Communication Port	COM0:RS232/RS485/RS422; COM2:RS232
Power	
Input Power	DC18V ～ 28V
Power Consumption	15W@DC 24V
Voltage Interruption Immunity	<3ms
Insulation Resistance	Over 50MΩ@500V DC
Dielectric Resistance	500V AC 1 minute
Structure	
PCB Coating	Yes
Enclosure	Metal
Dimensions (W x H x D)	395 x 259 x 25.5 mm
Cut-out Dimensions	382 x 246 mm
Mounting	Panel mounting & VESA mounting (100 x 100 mm)
Weight	2.5 kg
Environment	
Operating Temperature	-10 ～60°C
Operating Humidity	0～90%RH (Non-condensing)
Storage Temperature	-20～60°C
Storage Humidity	0～90%RH (Non-condensing)
Vibration Resistance	10 ～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions
Cooling Method	Natural air circulation
Certification	
Panel Protection Grade	Front panel: IP65
CE Certificate	EN61000-6-4:2019，EN61000-6-2:2019
Software	
Configuration Software	Kinco DToolsPro

Dimensions (mm)

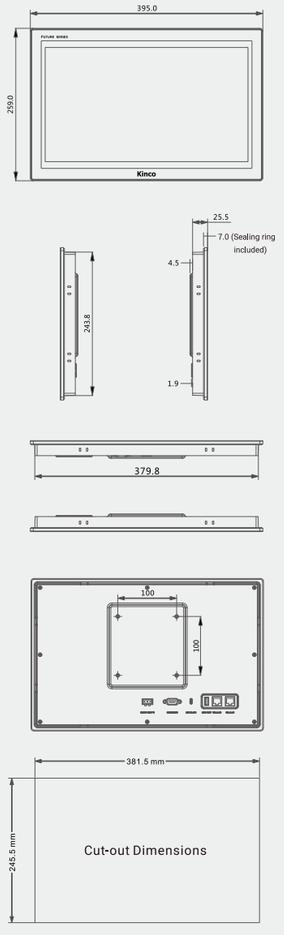

FUTURE Series 2 - Advanced Type

Advanced Type

F2156E2

- 15.6" 1920*1080 resistive screen with 16.7 million colors
- Two Ethernet ports and two serial ports
- Quad-core CPU with 1GB RAM + 8GB flash
- Metal enclosure + PCB coating + power isolation
- Compatible with the latest configuration software Kinco DtoolsPro

Model/Specification	F2156E2
Performance	
Display Size	15.6" TFT
Display Area (W x H)	344.16 x 193.59 mm
Resolution	1920*1080
Colors	16.7 million
Viewing Angle (T/B/L/R)	89/89/89/89
Contrast Ratio	1000:1
Backlight	LED
Brightness	300 cd/m^2
Backlight Life Time	50000 hours
Touch Panel	4-wire resistive type (surface hardness: 3H)
CPU	Quad-core ARM 1.8GHz
Memory	1GB RAM + 8GB flash
RTC	Built-in RTC + 512KB recipe
Expandable Memory	1*USB Host
Printer Port	USB Host / Serial port
Ethernet	LAN0:10/100/1000Mbps; LAN1:10/100Mbps
Program Download	Ethernet port / USB slave / U disk
Communication Port	COM0:RS232/RS485/RS422; COM2:RS232
Power	
Input Power	DC18V ～ 28V
Power Consumption	15W@DC 24V
Voltage Interruption Immunity	<3ms
Insulation Resistance	Over 50MΩ@500V DC
Dielectric Resistance	500V AC 1 minute
Structure	
PCB Coating	Yes
Enclosure	Metal
Dimensions (W x H x D)	395 x 259 x 25.5 mm
Cut-out Dimensions	382 x 246 mm
Mounting	Panel mounting & VESA mounting (100 x 100 mm)
Weight	2.5 kg
Environment	
Operating Temperature	-10 ～60°C
Operating Humidity	0～90%RH (Non-condensing)
Storage Temperature	-20～60°C
Storage Humidity	0～90%RH (Non-condensing)
Vibration Resistance	10 ～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions
Cooling Method	Natural air circulation
Certification	
Panel Protection Grade	Front panel: IP65
CE Certificate	EN61000-6-4:2019，EN61000-6-2:2019
Software	
Configuration Software	Kinco DToolsPro

Dimensions (mm)

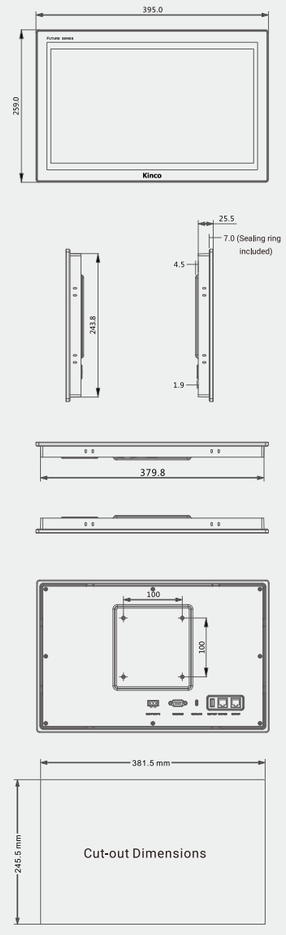

Advanced Type - UL

F2070E2(UL)

- 7" display with 16.7 million colors
- Quad-core CPU with 1GB RAM + 8GB flash
- PCB coating + power isolation
- Two Ethernet ports + three serial ports, two of which support RS485
- Compatible with the latest KincoDToolsPro configuration software and EdgeAccess2

Model/Specification	F2070E2(UL)
Performance	
Display Size	7″ TFT
Display Area (W x H)	154.08 x 85.92 mm
Resolution	800*480
Colors	16.7 million
Viewing Angle (T/B/L/R)	80/80/80/80
Contrast Ratio	800:1
Backlight	LED
Brightness	400 cd/m^2
Backlight Life Time	50000 hours
Touch Panel	4-wire resistive type (surface hardness: 3H)
CPU	Quad-core ARM 1.8GHz
Memory	1GB RAM + 8GB flash
RTC	Built-in RTC + 512KB recipe
Expandable Memory	1*USB Host
Printer Port	USB Host / Serial port
Ethernet	LAN0:10/100/1000Mbps; LAN1: 10/100Mbps
Program Download	Ethernet port / USB slave / U disk
Communication Port	COM0:RS232/RS485/RS422; COM1:RS485/RS422;COM2:RS232
Power	
Input Power	DC18V ～ 28V
Power Consumption	7W@DC 24V
Voltage Interruption Immunity	<3ms
Insulation Resistance	Over 50MΩ@500V DC
Dielectric Resistance	500V AC 1 minute
Structure	
PCB Coating	Yes
Enclosure	Engineering plastic
Dimensions (W x H x D)	204 x 150 x 37 mm
Cut-out Dimensions	192 x 138 mm
Mounting	Panel mounting
Weight	0.6 kg
Environment	
Operating Temperature	-10 ～60°C
Operating Humidity	0～90%RH (Non-condensing)
Storage Temperature	-20～60°C
Storage Humidity	0～90%RH (Non-condensing)
Vibration Resistance	10 ～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions
Cooling Method	Natural air circulation
Certification	
Panel Protection Grade	Front panel: IP65
CE Certificate	EN IEC 61000-6-4:2019，EN IEC 61000-6-2:2019
UL Certificate	UL 61010-1
Software	
Configuration Software	Kinco DToolsPro

Dimensions (mm)

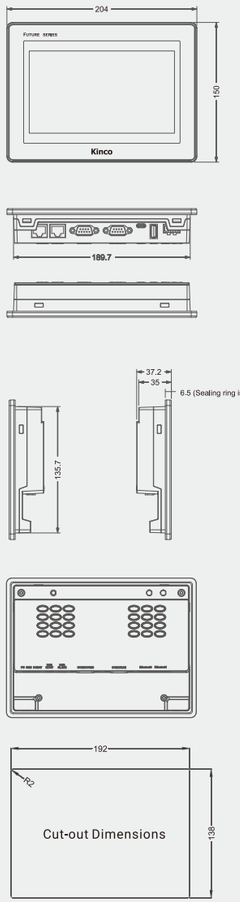

FUTURE Series 2 - Advanced Type - UL

Advanced Type - UL

F2100E2(UL)

- 10.1" wide-viewing-angle display with 16.7 million colors
- Two Ethernet ports + two serial ports; built-in power isolation
- Quad-core CPU with 1GB RAM + 8GB flash
- Compatible with the latest KincoDToolsPro configuration software

Model/Specification	F2100E2(UL)
Performance	
Display Size	10.1″ TFT
Display Area (W x H)	222.72 x 125.28 mm
Resolution	1024*600
Colors	16.7 million
Viewing Angle (T/B/L/R)	60/60/70/70
Contrast Ratio	500:1
Backlight	LED
Brightness	350 cd/m^2
Backlight Life Time	50000 hours
Touch Panel	4-wire resistive type (surface hardness: 3H)
CPU	Quad-core ARM 1.8GHz
Memory	1GB RAM + 8GB flash
RTC	Built-in RTC + 512KB recipe
Expandable Memory	1*USB Host
Printer Port	USB Host / Serial port
Ethernet	LAN0:10/100/1000Mbps; LAN1:10/100Mbps
Program Download	Ethernet port / USB slave / U disk
Communication Port	COM0:RS232/RS485/RS422; COM2:RS232
Power	
Input Power	DC18V ～ 28V
Power Consumption	7W@DC 24V
Voltage Interruption Immunity	<3ms
Insulation Resistance	Over 50MΩ@500V DC
Dielectric Resistance	500V AC 1 minute
Structure	
PCB Coating	Yes
Enclosure	Engineering plastic
Dimensions (W x H x D)	271 x 213 x 38 mm
Cut-out Dimensions	260 x 202 mm
Mounting	Panel mounting
Weight	1.1 kg
Environment	
Operating Temperature	-10 ～60°C
Operating Humidity	0～90%RH (Non-condensing)
Storage Temperature	-20～60°C
Storage Humidity	0～90%RH (Non-condensing)
Vibration Resistance	10 ～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions
Cooling Method	Natural air circulation
Certification	
Panel Protection Grade	Front panel: IP65
CE Certificate	EN IEC 61000-6-4:2019，EN IEC 61000-6-2:2019
UL Certificate	UL 61010-1
Software	
Configuration Software	Kinco DToolsPro

Dimensions (mm)

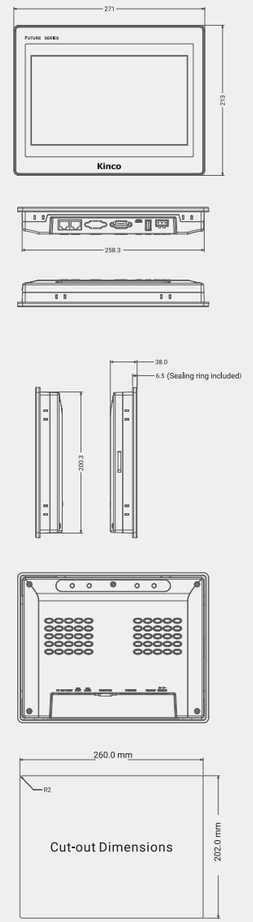

Advanced Type - UL

F2121E2(UL)

- 12.1" HD display with 16.7 million colors
- Two Ethernet ports and two serial ports
- Quad-core CPU with 1GB RAM + 8GB flash
- Metal enclosure + PCB coating + power isolation
- Compatible with the latest KincoDToolsPro configuration software

Model/Specification	F2121E2(UL)
Performance	
Display Size	12.1" TFT
Display Area (W x H)	261.12 x 163.2 mm
Resolution	1280*800
Colors	16.7 million
Viewing Angle (T/B/L/R)	85/85/85/85
Contrast Ratio	1200:1
Backlight	LED
Brightness	400 cd/m^2
Backlight Life Time	50000 hours
Touch Panel	4-wire resistive type (surface hardness: 3H)
CPU	Quad-core ARM 1.8GHz
Memory	1GB RAM + 8GB flash
RTC	Built-in RTC + 512KB recipe
Expandable Memory	1*USB Host
Printer Port	USB Host / Serial port
Ethernet	LAN0:10/100Mbps; LAN1:10/100Mbps
Program Download	Ethernet port / USB slave / U disk
Communication Port	COM0:RS232/RS485/RS422;COM2:RS232
Power	
Input Power	DC18V ～ 28V
Power Consumption	15W@DC 24V
Voltage Interruption Immunity	<3ms
Insulation Resistance	Over 50MΩ@500V DC
Dielectric Resistance	500V AC 1 minute
Structure	
PCB Coating	Yes
Enclosure	Metal
Dimensions (W x H x D)	313 x 235 x 49 mm
Cut-out Dimensions	295 x 217 mm
Mounting	Panel mounting
Weight	5 kg
Environment	
Operating Temperature	-10 ～60°C
Operating Humidity	0～90%RH (Non-condensing)
Storage Temperature	-20～60°C
Storage Humidity	0～90%RH (Non-condensing)
Vibration Resistance	10 ～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions
Cooling Method	Natural air circulation
Certification	
Panel Protection Grade	Front panel: IP65
CE Certificate	EN61000-6-4:2019，EN61000-6-2:2019
UL Certificate	UL 61010-1
Software	
Configuration Software	Kinco DToolsPro

Dimensions (mm)

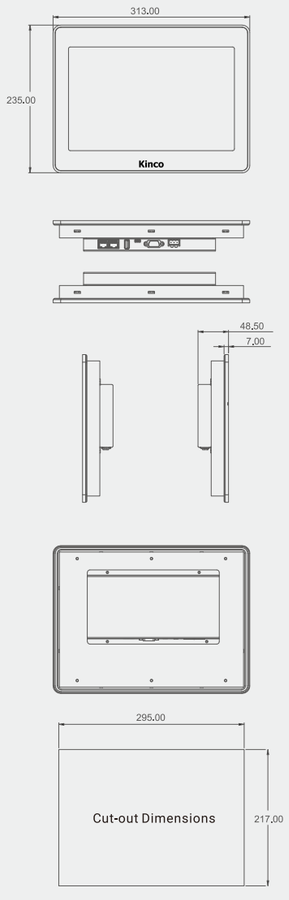

FUTURE Series 2 - Advanced Type - UL

Advanced Type - UL

F2156E2(UL)

- 15.6" 1920*1080 resistive screen with 16.7 million colors
- Two Ethernet ports and two serial ports
- Quad-core CPU with 1GB RAM + 8GB flash
- Metal enclosure + PCB coating + power isolation
- Compatible with the latest configuration software Kinco DtoolsPro

Model/Specification	F2156E2(UL)
Performance	
Display Size	15.6" TFT
Display Area (W x H)	344.16 x 193.59 mm
Resolution	1920*1080
Colors	16.7 million
Viewing Angle (T/B/L/R)	89/89/89/89
Contrast Ratio	1000:1
Backlight	LED
Brightness	300 cd/m^2
Backlight Life Time	50000 hours
Touch Panel	4-wire resistive type (surface hardness: 3H)
CPU	Quad-core ARM 1.8GHz
Memory	1GB RAM + 8GB flash
RTC	Built-in RTC + 512KB recipe
Expandable Memory	1*USB Host
Printer Port	USB Host / Serial port
Ethernet	LAN0:10/100/1000Mbps; LAN1:10/100Mbps
Program Download	Ethernet port / USB slave / U disk
Communication Port	COM0:RS232/RS485/RS422; COM2:RS232
Power	
Input Power	DC18V ～ 28V
Power Consumption	15W@DC 24V
Voltage Interruption Immunity	<3ms
Insulation Resistance	Over 50MΩ@500V DC
Dielectric Resistance	500V AC 1 minute
Structure	
PCB Coating	Yes
Enclosure	Metal
Dimensions (W x H x D)	395 x 259 x 25.5 mm
Cut-out Dimensions	382 x 246 mm
Mounting	Panel mounting & VESA mounting (100 x 100 mm)
Weight	2.5 kg
Environment	
Operating Temperature	-10 ～60°C
Operating Humidity	0～90%RH (Non-condensing)
Storage Temperature	-20～60°C
Storage Humidity	0～90%RH (Non-condensing)
Vibration Resistance	10 ～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions
Cooling Method	Natural air circulation
Certification	
Panel Protection Grade	Front panel: IP65
CE Certificate	EN61000-6-4:2019，EN61000-6-2:2019
UL Certificate	UL 61010-1
Software	
Configuration Software	Kinco DToolsPro

Dimensions (mm)

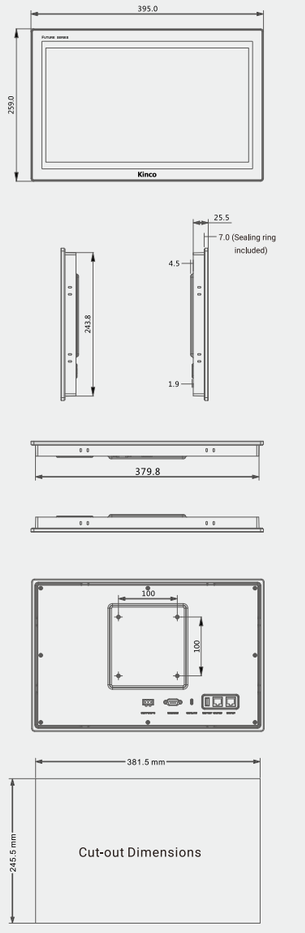

Capacitive Touch Screen

GL2070HE-LX

- 7" 1024*600 HD display with 16.7 million colors
- 85/85/85/85 wide viewing angle
- Dual-core CPU with 256MB RAM and 4GB eMMC
- One Ethernet port + three serial ports, two of which support RS485
- Compatible with the latest KincoDToolsPro configuration software and EdgeAccess2

Model/Specification	GL2070HE-LX
Performance	
Display Size	7"TET
Display Area (W x H)	154.21 x 85.92 mm
Resolution	1024*600
Colors	16.7 million
Viewing Angle (T/B/L/R)	85/85/85/85
Contrast Ratio	800:1
Backlight	LED
Brightness	450 cd/m^2
Backlight Life Time	30000 hours
Touch Panel	Tempered glass, capacitive type (surface hardness: 6H)
CPU	Dual-core ARM 1 GHz
Memory	256MB RAM + 4GB eMMC
RTC	Built-in
Expandable Memory	1*USB Host
Printer Port	USB Host / Serial port
Ethernet	LAN0: 10/100 Mbps
Program Download	USB Slave (Type-C)/U disk/Ethernet port
VPN	HMI remote upload, download, and monitoring; PLC pass-through programming for program upload, download, and monitoring
Communication Port	COM0:RS232/RS485/RS422; COM1:RS485; COM2:RS232
Power	
Input Power	DC18V ～ 28V
Power Consumption	7W@DC 24V
Voltage Interruption Immunity	<3ms
Insulation Resistance	Over 50MΩ@500V DC
Dielectric Resistance	500V AC 1 minute
Structure	
Enclosure	Engineering plastic
Dimensions (W x H x D)	204 x 150 x 37 mm
Cut-out Dimensions	192 x 138 mm
Mounting	Panel mounting
Weight	0.5 kg
Environment	
Operating Temperature	0 ～50°C
Operating Humidity	10～90%RH (Non-condensing)
Storage Temperature	-20～60°C
Storage Humidity	10～90%RH (Non-condensing)
Vibration Resistance	10 ～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions
Cooling Method	Natural air circulation
Certification	
Panel Protection Grade	Front panel: IP65
CE Certificate	EN61000-6-4：2019, EN61000-6-2：2019
Software	
Configuration Software	Kinco DToolsPro

Dimensions (mm)

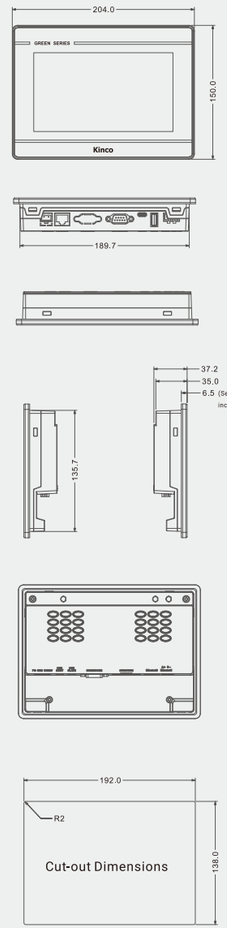

Capacitive Touch Screen

GR2070HE-LX

- 7" 1024*600 HD capacitive touch screen with 16.7 million colors
- 85/85/85/85 wide viewing angle
- Quad-core CPU with 512MB RAM and 4GB eMMC
- Frameless design for rear mounting
- Compatible with the latest KincoDToolsPro configuration software and EdgeAccess2

Model/Specification	GR2070HE-LX
Performance	
Display Size	7"TET
Display Area (W x H)	154.21 x 85.92 mm
Resolution	1024*600
Colors	16.7 million
Viewing Angle (T/B/L/R)	85/85/85/85
Contrast Ratio	800:1
Backlight	LED
Brightness	450 cd/m^2
Backlight Life Time	30000 hours
Touch Panel	Tempered glass, capacitive type (surface hardness: 6H)
CPU	Quad-core ARM 1.5 GHz
Memory	512MB RAM + 4GB eMMC
RTC	Built-in
Expandable Memory	1*USB Host
Printer Port	USB Host / Serial port
Ethernet	LAN0: 10/100 Mbps
Program Download	USB Slave (Type-C) / U disk / Ethernet port
VPN	HMI remote upload, download, and monitoring; PLC pass-through programming for program upload, download, and monitoring
Communication Port	COM0:RS232/RS485/RS422; COM1:RS485; COM2:RS232
Power	
Input Power	DC18V ～ 28V
Power Consumption	7W@DC 24V
Voltage Interruption Immunity	<3ms
Insulation Resistance	Over 50MΩ@500V DC
Dielectric Resistance	500V AC 1 minute
Structure	
Enclosure	Frameless, metal rear cover
Dimensions (W x H x D)	190 x 110 x 30 mm
Cut-out Dimensions	154 x 86 mm
Mounting	Rear mounting
Weight	0.5 kg
Environment	
Operating Temperature	0 ～50°C
Operating Humidity	10～90%RH (Non-condensing)
Storage Temperature	-20～60°C
Storage Humidity	10～90%RH (Non-condensing)
Vibration Resistance	10 ～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions
Cooling Method	Natural air circulation
Certification	
Panel Protection Grade	Front panel: IP65
CE Certificate	EN61000-6-4：2019, EN61000-6-2：2019
Software	
Configuration Software	Kinco DToolsPro

Dimensions (mm)

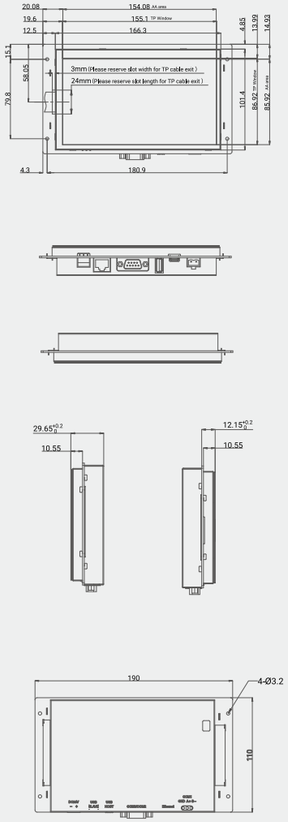

Capacitive Touch Screen

GR2104E-PX

- Flush mounting with narrow-bezel design for seamless cabinet integration
- 10.4" 1024*768 HD display with 16.7 million colors
- 80/80/80/80 wide viewing angle
- Quad-core CPU with 512MB RAM and 4GB eMMC
- One Ethernet port + three serial ports, two of which support RS485
- Compatible with the latest KincoDToolsPro configuration software



Model/Specification	GR2104E-PX
Performance	
Display Size	10.4" TET
Display Area (W x H)	210.43 x 157.82 mm
Resolution	1024*768
Colors	16.7 million
Viewing Angle (T/B/L/R)	80/80/80/80
Contrast Ratio	1000:1
Backlight	LED
Brightness	600 cd/m^2
Backlight Life Time	50000 hours
Touch Panel	Tempered glass, capacitive type (surface hardness: 6H)
CPU	Quad-core ARM 1.5GHz
Memory	512MB RAM + 4GB eMMC
RTC	Built-in
Expandable Memory	1*USB Host
Printer Port	USB Host / Serial port
Ethernet	LAN0: 10/100Mbps
Program Download	USB Slave (TYPE-C) / U disk
Audio	1*Audio output
Camera	1*Front camera
Communication Port	COM0:RS232/RS485/RS422; COM1:RS485/RS422; COM2:RS232
Power	
Input Power	DC18V ～ 28V (isolated)
Power Consumption	15W@DC 24V
Voltage Interruption Immunity	<3ms
Insulation Resistance	Over 50MΩ@500V DC
Dielectric Resistance	500V AC 1 minute
Structure	
Enclosure	Frameless
Dimensions (W x H x D)	259.1 x 260.3 mm
Cut-out Dimensions	250.9 x 198.1 mm
Mounting	Rear mounting
Environment	
Operating Temperature	0 ～50°C
Operating Humidity	10～90%RH (Non-condensing)
Storage Temperature	-20～60°C
Storage Humidity	10～90%RH (Non-condensing)
Vibration Resistance	10 ～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions
Cooling Method	Natural air circulation
Certification	
Panel Protection Grade	Front panel: IP65
CE Certificate	EN61000-6-4:2019, EN61000-6-2:2019
Software	
Configuration Software	Kinco DToolsPro

Dimensions (mm)







Capacitive Touch Screen

Capacitive Touch Screen

GR2121E-PX

- Flush mounting with narrow-bezel design for seamless cabinet integration
- 85/85/85/85 wide viewing angle
- Quad-core CPU with 512MB RAM and 4GB eMMC
- One Ethernet port + three serial ports, two of which support RS485
- Compatible with the latest KincoDToolsPro configuration software and EdgeAccess2



Model/Specification	GR2121E-PX
Performance	
Display Size	12.1" TET
Display Area (W x H)	245.76 x 184.32 mm
Resolution	1024*768
Colors	16.7 million
Viewing Angle (T/B/L/R)	85/85/85/85
Contrast Ratio	1000:1
Backlight	LED
Brightness	500 cd/m^2
Backlight Life Time	50000 hours
Touch Panel	Tempered glass, capacitive type (surface hardness: 6H)
CPU	Quad-core ARM 1.5GHz
Memory	512MB RAM + 4GB eMMC
RTC	Built-in
Expandable Memory	1*USB Host
Printer Port	USB Host / Serial port
Ethernet	LAN0: 10/100Mbps
Program Download	USB Slave (TYPE-C) / U disk
Audio	1*Audio output
Camera	1*Front camera
Communication Port	COM0:RS232/RS485/RS422; COM1:RS485/RS422; COM2:RS232
Power	
Input Power	DC18V ～ 28V (isolated)
Power Consumption	15W@DC 24V
Voltage Interruption Immunity	<3ms
Insulation Resistance	Over 50MΩ@500V DC
Dielectric Resistance	500V AC 1 minute
Structure	
Enclosure	Frameless
Dimensions (W x H x D)	296 x 240 x 39.5 mm
Cut-out Dimensions	246.8 x 185.3 mm
Mounting	Rear mounting
Environment	
Operating Temperature	0 ～50°C
Operating Humidity	10～90%RH (Non-condensing)
Storage Temperature	-20～60°C
Storage Humidity	10～90%RH (Non-condensing)
Vibration Resistance	10 ～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions
Cooling Method	Natural air circulation
Certification	
Panel Protection Grade	Front panel: IP65
CE Certificate	EN61000-6-4:2019, EN61000-6-2:2019
Software	
Configuration Software	Kinco DToolsPro

Dimensions (mm)







Capacitive Touch Screen

G2100HE-LX/G2100HE-LX

- 10.1" 800*1280 screen with 16.7 million colors and 85/85/85/85 wide viewing angle
- Quad-core 1.5GHz CPU with 512MB RAM and 4GB flash storage
- One Ethernet port + three serial ports
- Narrow-bezel capacitive touch panel with gesture zoom support
- Compatible with the latest Kinco DToolsPro configuration software and EdgeAccess 2.0

Model/Specification	G2100HE-LX	G2100HE-LX-4G
Performance		
Display Size	10.1″ TFT	
Display Area (W x H)	216.58 x 135.36 mm	
Resolution	1280 *800	
Colors	16.7 million	
Viewing Angle (T/B/L/R)	85/85/85/85	
Contrast Ratio	800:1	
Backlight	LED	
Brightness	350 cd/m^2	
Backlight Life Time	30000 hours	
Touch Panel	Tempered glass, capacitive type (surface hardness: 6H)	
CPU	Quad-core ARM 1.5 GHz	
Memory	512MB RAM+ 4GB eMMC	
RTC	Built-in	
Expandable Memory	1*USB Host	
Printer Port	USB Host / Serial port	
Ethernet	LAN0:10/100Mbps	
Program Download	USB Slave (Type-C) / U disk / Ethernet port	
Network Access	Ethernet	Ethernet/4G
Wi-Fi	None	LTE-FDD Band 1/3/5/8, LTE-TDD Band 34/38/39/40/41
VPN	HMI remote upload, download, and monitoring; PLC pass-through programming for program upload, download, and monitoring	
Other Interfaces	1*Audio Interface	
Communication Port	COM0:RS232/RS485/RS422; COM1:RS485; COM2:RS232	
Power		
Input Power	DC18V ～DC28V	
Power Consumption	7W@DC 24V	
Voltage Interruption Immunity	<3ms	
Insulation Resistance	Over 50MΩ@500V DC	
Dielectric Resistance	500V AC 1 minute	
Structure		
Enclosure	Metal	
Dimension (W x H x D)	249 x 159 x 32.5 mm	
Cut-out Dimensions	192 x 138 mm	
Mounting	Clip mounting & VESA mounting (75 x 75 mm)	
Environment		
Operating Temperature	0 ～50°C	
Operating Humidity	10～90%RH (Non-condensing)	
Storage Temperature	-20～60°C	
Storage Humidity	10～90%RH (Non-condensing)	
Vibration Resistance	10-500Hz, 30m/s^2, 1 hour each for X, Y, Z directions	
Cooling Method	Natural air circulation	
Certification		
Panel Protection Grade	IP65	
CE Certificate	EN IEC 61000-6-2:2019，EN IEC 61000-6-4:2019	
Software		
Configuration Software	Kinco DTools Pro	

Dimensions (mm)



Capacitive Touch Screen

Capacitive Touch Screen

F2100HE2-PX

- 10.1" 1280*800 HD display with 16.7 million colors
- 85/85/85/85 wide viewing angle
- Quad-core CPU with 1GB RAM and 8GB eMMC
- Two Ethernet port + three serial ports, two of which support RS485
- Compatible with the latest KincoDToolsPro configuration software and EdgeAccess2

Model/Specification	F2100HE2-PX
Performance	
Display Size	10.1" TET
Display Area (W x H)	216.58 x 135.36 mm
Resolution	1280*800
Colors	16.7 million
Viewing Angle (T/B/L/R)	85/85/85/85
Contrast Ratio	800:1
Backlight	LED
Brightness	350 cd/m^2
Backlight Life Time	50000 hours
Touch Panel	Tempered glass, capacitive type (surface hardness: 6H)
CPU	Quad-core ARM 1.8GHz
Memory	1GB RAM + 8GB eMMC
RTC	Built-in
Expandable Memory	1*USB Host
Printer Port	USB Host / Serial port
Ethernet	LAN0: 10/100 Mbps; LAN1:10/100 Mbps
Program Download	USB Slave (Type-C) / U disk / Ethernet port
Audio	1*Audio output
VPN	HMI remote upload, download, and monitoring; PLC pass-through programming for program upload, download, and monitoring
Communication Port	COM0:RS232/RS485/RS422; COM1:RS485;COM2:RS232
Power	
Input Power	DC18V ～ 28V (isolated)
Power Consumption	7W@DC 24V
Voltage Interruption Immunity	<3ms
Insulation Resistance	Over 50MΩ@500V DC
Dielectric Resistance	500V AC 1 minute
Structure	
PCB Coating	Yes
Enclosure	Metal
Dimensions (W x H x D)	249 x 159 x 32.5 mm
Cut-out Dimensions	192 x 138 mm
Mounting	Panel mounting & VESA mounting (75 x 75 mm)
Environment	
Operating Temperature	-10~60°C
Operating Humidity	0～90%RH (Non-condensing)
Storage Temperature	-20～60°C
Storage Humidity	0～90%RH (Non-condensing)
Vibration Resistance	10 ～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions
Cooling Method	Natural air circulation
Certification	
Panel Protection Grade	Front panel: IP65
CE Certificate	EN IEC 61000-6-4:2019, EN IEC 61000-6-2:2019
Software	
Configuration Software	Kinco DToolsPro

Dimensions (mm)



Capacitive Touch Screen

F2156E2-PX/F2156E2-PX(UL)

- 15.6" 1920*1080 capacitive touch screen with 16.7 million colors
- Two Ethernet ports and two serial ports
- Quad-core CPU + 1GB RAM + 8GB eMMC
- Metal enclosure + PCB coating + power isolation
- Compatible with the latest configuration software Kinco DtoolsPro

Model/Specification	F2156E2-PX	F2156E2-PX(UL)
Performance		
Display Size	15.6" TFT	
Display Area (W x H)	344.16 x 193.59 mm	
Resolution	1920*1080	
Colors	16.7 million	
Viewing Angle (T/B/L/R)	89/89/89/89	
Contrast Ratio	1000:1	
Backlight	LED	
Brightness	300 cd/m^2	
Backlight Life Time	50000 hours	
Touch Panel	Tempered glass, capacitive type (surface hardness: 6H)	
CPU	Quad-core ARM 1.8GHz	
Memory	1GB RAM + 8GB eMMC	
RTC	Built-in RTC + 512KB recipe	
Expandable Memory	1*USB Host	
Printer Port	USB Host / Serial port	
Ethernet	LAN0:10/100/1000Mbps; LAN1:10/100Mbps	
Program Download	USB slave/U disk/Ethernet port	
Communication Port	COM0:RS232/RS485/RS422; COM2:RS232	
Power		
Input Power	DC18V ～ 28V (isolated)	
Power Consumption	15W@DC 24V	
Voltage Interruption Immunity	<3ms	
Insulation Resistance	Over 50MΩ@500V DC	
Dielectric Resistance	500V AC 1 minute	
Structure		
PCB Coating	Yes	
Enclosure	Metal	
Dimension (W x H x D)	395 x 259 x 25.5 mm	
Cut-out Dimensions	382 x 246 mm	
Mounting	Panel mounting & VESA mounting (100 x 100 mm)	
Weight	2.5kg	
Environment		
Operating Temperature	-10 ～60°C	
Operating Humidity	0～90%RH (Non-condensing)	
Storage Temperature	-20～60°C	
Storage Humidity	0～90%RH (Non-condensing)	
Vibration Resistance	10 ～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions	
Cooling Method	Natural air circulation	
Certification		
Panel Protection Grade	Front panel: IP65	
CE Certificate	EN IEC 61000-6-2:2019, EN IEC 61000-6-4:2019	
UL Certificate	None	UL 61010-1
Software		
Configuration Software	Kinco DToolsPro	

Dimensions (mm)

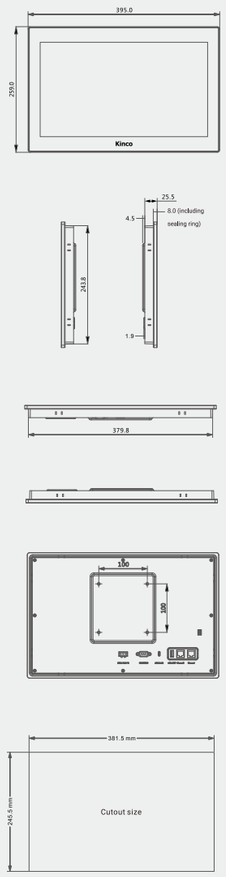

Capacitive Touch Screen

F2156E-TX

- 15.6" 1920*1080 capacitive touch screen with 16.7 million colors
- One Ethernet port and two serial ports; Quad-core CPU + 1GB RAM + 8GB eMMC
- Integrated design with built-in buttons and emergency stop
- Support arm mounting for ample workspace, high flexibility, and strong adaptability
- Metal enclosure + PCB coating + power isolation
- Compatible with the latest configuration software Kinco DtoolsPro

Model/Specification	F2156E-TX
Performance	
Display Size	15.6" TFT
Display Area (W x H)	344.16 x 193.59 mm
Resolution	1920*1080
Colors	16.7 million
Viewing Angle (T/B/L/R)	89/89/89/89
Contrast Ratio	1000:1
Backlight	LED
Brightness	300 cd/m^2
Backlight Life Time	50000 hours
Touch Panel	Tempered glass, capacitive type (surface hardness: 6H)
CPU	Quad-core ARM 1.8GHz
Memory	1GB RAM + 8GB eMMC
RTC	Built-in RTC + 512KB recipe
Expandable Memory	1*USB Host
Ethernet	LAN0:10/100/1000Mbps
Emergency Stop	1*Dual-channel emergency stop
Button	3*Metal button (red/blue/green)
Program Download	USB slave/U disk/Ethernet port
Communication Port	COM0:RS232/RS485/RS422; COM2:RS232
Power	
Input Power	DC18V ～ 28V (isolated)
Power Consumption	15W@DC 24V
Voltage Interruption Immunity	<3ms
Insulation Resistance	Over 50MΩ@500V DC
Dielectric Resistance	500V AC 1 minute
Structure	
PCB Coating	Yes
Enclosure	Metal
Dimension (W x H x D)	397 x 297 x 46 mm
Cut-out Dimensions	118 x 70 mm
Mounting	Support arm mounting
Weight	4 kg
Environment	
Operating Temperature	-10 ～60°C
Operating Humidity	0～90%RH (Non-condensing)
Storage Temperature	-20～60°C
Storage Humidity	0～90%RH (Non-condensing)
Vibration Resistance	10 ～500Hz,30m/s^2, X,Y,Z direction/hour
Cooling Method	Natural air cooling
Certification	
Panel Protection Grade	Front panel: IP65
CE Certificate	EN IEC 61000-6-2:2019, EN IEC 61000-6-4:2019
Software	
Configuration Software	Kinco DToolsPro

Dimensions (mm)

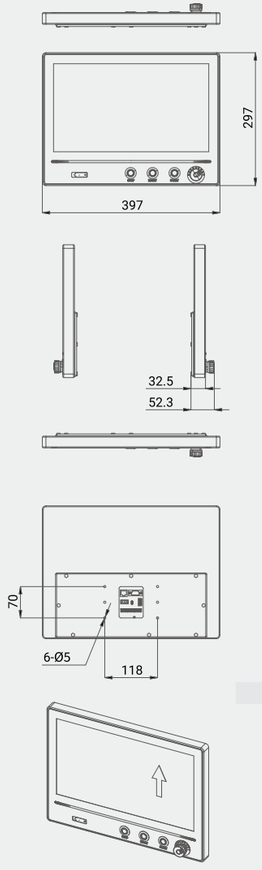

Handheld Terminal

SZ7PE/SZ7PES

- 7" 1024*600 capacitive touch screen with 16.7 million colors and 85/85/85/85 wide viewing angle
- Dual-core CPU +256MB RAM + 4GB eMMC; 5 or 10 meter cable
- One Ethernet + one serial port; one emergency stop + one selector switch + six programmable buttons
- Compatible with the latest configuration software Kinco DtoolsPro

Model/Specification	SZ7PE	SZ7PES
Performance		
Display Size	7" TFT	
Display Area (W x H)	154.21 x 85.92 mm	
Resolution	1024*600	
Colors	16.7 million	
Viewing Angle (T/B/L/R)	85/85/85/85	
Contrast Ratio	800:1	
Backlight	LED	
Brightness	450 cd/m^2	
Backlight Life Time	30000 hours	
Programmable Keys	6	
Emergency Stop	1*Dual-channel emergency stop	
Selector Switch	1*Auto/Manual selector switch	
Grip Switch	None	3-Position grip switch
Touch Panel	4-wire resistive type (surface hardness: 3H)	
CPU	Dual-core ARM 1GHz	
Memory	256MB RAM + 4GB eMMC	
RTC	Built-in	
Expandable Memory	1*USB Host	
Printer Port	USB Host / Serial port	
Ethernet	LAN0:10/100MHz	
Program Download	U disk / Ethernet port	
VPN	HMI remote upload, download, and monitoring; PLC pass-through programming for program upload, download, and monitoring	
Communication Port	COM0:RS485	
Power		
Input Power	DC10V ～DC28V	
Power Consumption	7W@DC 24V	
Voltage Interruption Immunity	<3ms	
Insulation Resistance	Over 50MΩ@500V DC	
Dielectric Resistance	500V AC 1 minute	
Structure		
Enclosure	Engineering plastic	
Cable	5-meter/10-meter 14-core flexible cable	
Dimension (W x H x D)	204 x 150 x 44 mm	
Mounting	Suspended mounting & VESA mounting (75 x 75 mm)	
Environment		
Operating Temperature	0 ～50°C	
Operating Humidity	10～90%RH (Non-condensing)	
Storage Temperature	-20～60°C	
Storage Humidity	10～90%RH (Non-condensing)	
Vibration Resistance	10 ～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions	
Cooling Method	Natural air circulation	
Certification		
Panel Protection Grade	Whole unit: IP54	
CE Certificate	EN IEC 61000-6-2:2019, EN IEC 61000-6-4:2019	
Software		
Configuration Software	Kinco DToolsPro	

Dimensions (mm)

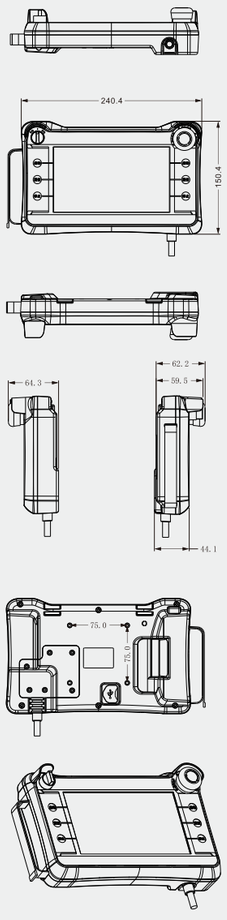

Handheld Terminal

SZ10PES/SZ10PES-K/SZ10PES-T

- 10.1" 1920*1200 capacitive touch screen with 16.7 million colors
- Quad-core CPU +1GB RAM + 8GB eMMC
- Dual-channel emergency stop + dual-channel enable switch + key switch + optional 16 programmable keys
- One Ethernet port + two serial ports; built-in RFID
- 7/10-meter flexible cable with optional connection box
- Compatible with the latest configuration software Kinco DtoolsPro and EdgeAccess 2.0

Model/Specification	SZ10PES	SZ10PES-K	SZ10PES-T
Performance			
Display Size	10.1" TFT		
Display Area (W x H)	215 x 133 mm		
Resolution	1920*1200		
Colors	16.7 million		
Viewing Angle (T/B/L/R)	85/85/85/85		
Contrast Ratio	600:1		
Backlight	LED		
Brightness	350 cd/m^2		
Backlight Life Time	50000 hours		
Programmable Keys	None	16	None
Emergency Stop	1*Dual-channel emergency stop		
Selector Switch	1*Key switch		
Grip Switch	Dual-channel 3-position enable switch		
RFID	Built-in		
Touch Panel	Tempered glass, capacitive type (surface hardness: 6H)		
CPU	Quad-core ARM 1.8GHz		
Memory	1GB RAM + 8GB eMMC		
RTC	Built-in		
Expandable Memory	1*USB Host		
Printer Port	USB Host / Serial port		
Ethernet	LAN0:10/100MHz		
Program Download	U disk / Ethernet port		
VPN	HMI remote upload, download, and monitoring; PLC pass-through programming for program upload, download, and monitoring		
Communication Port	COM0:RS485/RS422; COM2:RS232		
Power			
Input Power	DC12V ～ 28V (isolated)		
Power Consumption	20W@DC 24V		
Voltage Interruption Immunity	<3ms		
Insulation Resistance	Over 50MΩ@500V DC		
Dielectric Resistance	500V AC 1 minute		
Structure			
PCB Coating	Yes		
Enclosure	Engineering plastic		
Dimension (W x H x D)	301 x 188 x 70 mm		
Cable	10-meter 24-core flexible aviation cable	7-meter 24-core coiled aviation cable	
Connection Box	Aviation connection box: SZ10-BOX (optional)		
Mounting	Suspended mounting & handheld		
Environment			
Operating Temperature	-10 ～60°C		
Operating Humidity	0～90%RH (Non-condensing)		
Storage Temperature	-20～60°C		
Storage Humidity	0～90%RH (Non-condensing)		
Vibration Resistance	10 ～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions		
Cooling Method	Natural air circulation		
Certification			
Drop Test	Passed		
Panel Protection Grade	Whole unit: IP54		
CE Certificate	EN IEC 61000-6-2:2019, EN IEC 61000-6-4:2019		
Software			
Configuration Software	Kinco DToolsPro		

Dimensions (mm)

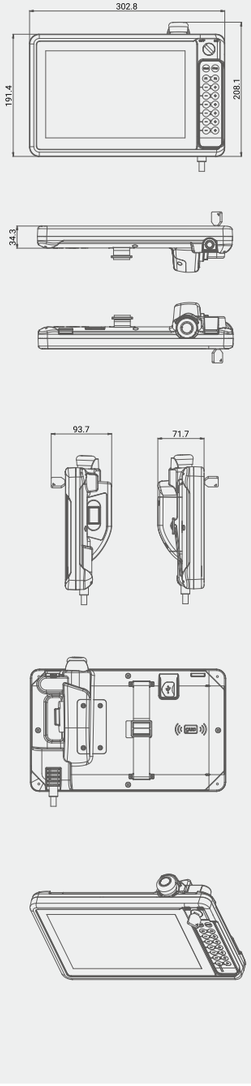

Waterproof

GL2070HE-WIFI-LRF

- 7" 1024*600 screen with 16.7 million colors and 85/85/85/85 wide viewing angle
- Dual-core 1.GHz CPU with 256MB RAM and 4GB flash storage
- IP65 certified, with isolated power&serial ports, and PCB coating
- Available with panel mounting or VESA bracket mounting options
- Compatible with the latest Kinco DToolsPro configuration software and EdgeAccess 2.0

Model/Specification	GL2070HE-WIFI-LRF
Performance	
Display Size	7" TFT
Display Area (W x H)	154.21 x 85.92 mm
Resolution	1024*600
Colors	16.7 million
Viewing Angle (T/B/L/R)	85/85/85/85
Contrast Ratio	800:1
Backlight	LED
Brightness	450 cd/m^2
Backlight Life Time	30000 hours
Touch Panel	4-wire resistive type (surface hardness: 3H)
CPU	Dual-core ARM 1 GHz
Memory	256MB RAM + 4GB eMMC
RTC	Built-in
Expandable Memory	1*USB Host
Printer Port	USB Host / Serial Port
Ethernet	LAN0:10/100Mbps
Program Download	U disk / Ethernet port
Network Access	Ethernet port / Wi-Fi (built-in antenna)
Wi-Fi	IEEE 802.11 b/g/n
VPN	HMI remote upload, download, and monitoring; PLC pass-through programming for program upload, download, and monitoring
Communication Port	COM0:RS232/RS485; COM2:RS232 (isolated)
Power	
Input Power	DC10V ～ 28V (power isolation)
Power Consumption	4.32W@DC 24V
Voltage Interruption Immunity	<3ms
Insulation Resistance	Over 50MΩ@500V DC
Dielectric Resistance	500V AC 1 minute
Structure	
PCB Coating	Yes
Enclosure	Engineering plastic
Dimension (W x H x D)	211.9 x 144.9 x 46.6 mm
Cable	5-meter 14-core flexible cable
Mounting	Handheld & VESA mounting (75 x 75 mm)
Environment	
Operating Temperature	0~50°C
Operating Humidity	10～90%RH (Non-condensing)
Storage Temperature	-20～60°C
Storage Humidity	10～90%RH (Non-condensing)
Vibration Resistance	10 ～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions
Cooling Method	Natural air circulation
Certification	
Panel Protection Grade	Whole unit: IP65
Software	
Configuration Software	Kinco DToolsPro

Dimensions (mm)

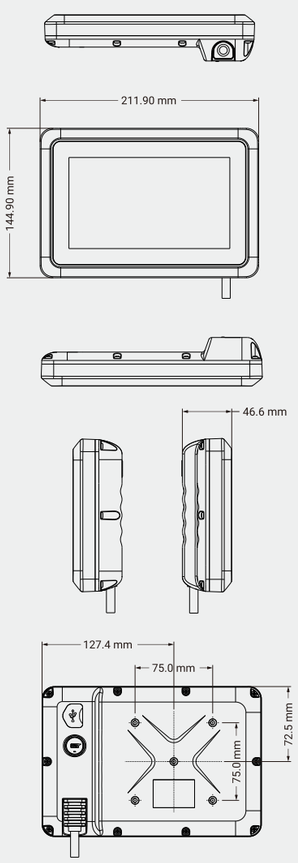

Waterproof

GL2100E-WIFI-LRF

- 10.1" 1024*600 screen with 16.7 million colors and 85/85/85/85 wide viewing angle
- Dual-core 1.GHz CPU with 256MB RAM and 4GB flash storage
- IP65 certified, with isolated power&serial ports, and PCB coating
- Available with panel mounting or VESA bracket mounting options
- Compatible with the latest Kinco DToolsPro configuration software and EdgeAccess 2.0

Model/Specification	GL2100E-WIFI-LRF
Performance	
Display Size	10.1" TFT
Display Area (W x H)	222.72 x 125.28 mm
Resolution	1024*600
Colors	16.7 million
Viewing Angle (T/B/L/R)	85/85/85/85
Contrast Ratio	800:1
Backlight	LED
Brightness	300 cd/m2
Backlight Life Time	30000 hours
Touch Panel	4-wire resistive type (surface hardness: 3H)
CPU	Dual-core ARM 1 GHz
Memory	256MB RAM + 4GB eMMC
RTC	Built-in
Expandable Memory	1*USB Host
Printer Port	USB Host / Serial Port
Ethernet	LAN0:10/100Mbps
Program Download	U disk / Ethernet port
Network Access	Ethernet port / Wi-Fi (built-in antenna)
Wi-Fi	IEEE 802.11 b/g/n
VPN	HMI remote upload, download, and monitoring; PLC pass-through programming for program upload, download, and monitoring
Communication Port	COM0:RS232/RS485; COM2:RS232 (isolated)
Power	
Input Power	DC10V ～ 28V (power isolation)
Power Consumption	6.72W@DC 24V
Voltage Interruption Immunity	<3ms
Insulation Resistance	Over 50MΩ@500V DC
Dielectric Resistance	500V AC 1 minute
Structure	
PCB Coating	Yes
Enclosure	Engineering plastic
Dimension (W x H x D)	271 x 191 x 49.5 mm
Cut-out Dimensions	260 x 180 mm
Cable	5-meter 14-core flexible cable
Mounting	Panel mounting & VESA mounting (75 x 75 mm)
Environment	
Operating Temperature	0~50°C
Operating Humidity	10～90%RH (Non-condensing)
Storage Temperature	-20～60°C
Storage Humidity	10～90%RH (Non-condensing)
Vibration Resistance	10 ～500Hz, 30m/s^2, 1 hour each for X, Y, Z directions
Cooling Method	Natural air circulation
Certification	
Panel Protection Grade	Whole unit: IP65
Software	
Configuration Software	Kinco DToolsPro

Dimensions (mm)

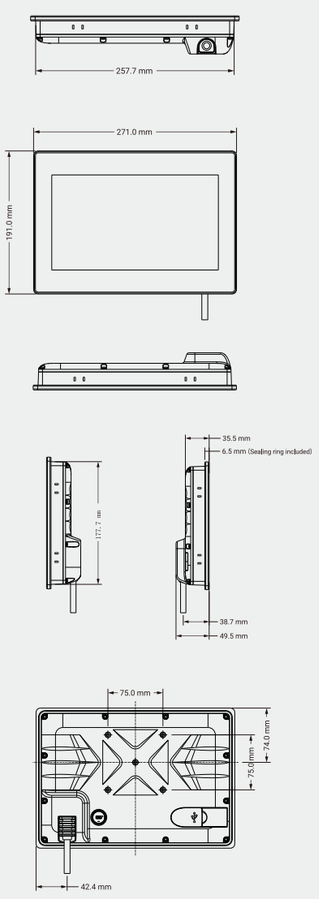

R321KB Desktop
High-frequency Reader/Writer

- USB port
- Built-in HF antenna
- Supports ISO/IEC 14443A/B, ISO/IEC 15693 & ISO 18000-3M1
- Read/Write range: up to 5 cm (Mifare 1 S50, normal conditions)
- Built-in LED indicator & buzzer

Model	RFID-R321KB-PB
Parameters	
Operating Voltage/Power Consumption	+5V/0.3W
Communication Port	USB
Port Type	USB Type A
Operating Frequency	13.56MHz
Antenna Mode	Integrated
Transmit Power	0.2W
Supported Protocols	ISO14443A/B,ISO15693/ISO18000-3M1
Read Range	5cm
Operating Temperature	-10°C~65°C
Dimensions	122 x 73 x 15 mm
Material	ABS

Dimensions (mm)

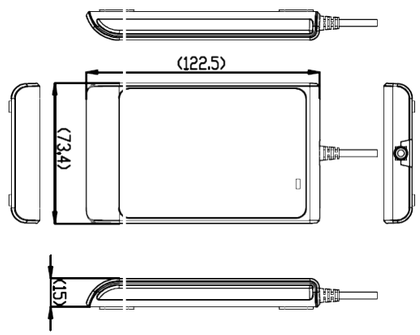

SN	Port Type	Pin Definition	Description
CON1	USB Type A plug	PIN1	+5V
		PIN2	D-
		PIN3	D+
		PIN4	GND
LED	LED indicator	Solid green	Device operating normally
		Flashing green	Electronic tag reading succeeded
ANT	Antenna	/	Reading area

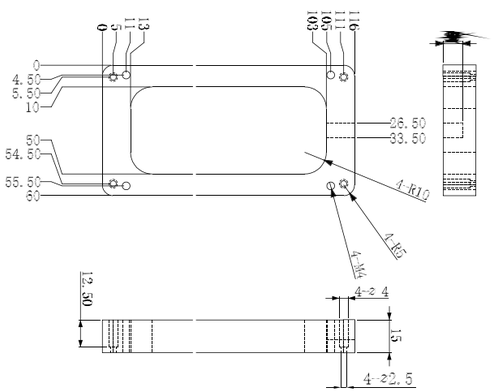

A new generation of Kinco configuration software:

Kinco DToolsPro

- Modern Office-style software
- Object-oriented programming (OOP) architecture
- Tag variable configuration mode - Structured Text (ST) programming friendly
- Integrated buttons + multi-copy + batch modification

Operation Log
Table-based configuration with import/export for rapid engineering

Tag Communication
OMRON, Siemens, Bottu, codesys, etc.

Template Library
Custom compound controls with full import/export support

RFID
Driver-free USB with one-click card login



Database
Built-in SQLite, plus support for MySQL, SQL Server, and PostgreSQL

I/O
Supports 8/16/32-bit data types with importable/exportable descriptions

Electronic Signature
Dual-confirmation workflow (Operator & Verifier) with complete traceability

Macros
Function template insertion, variable search & replace, and incremental compilation

Dynamic Alarms
Deviation, multi-range, and expression-based alarms with full historical query

Multi-screen Networking
Single PLC connects to multiple HMIs with one-click interlocking for synchronized control

Centralized management
User permissions, recipes, and historical data with batch import/export

WEB Browser
Direct PLC debugging without the need for an industrial PC